



Headquarter

Onyx Healthcare Inc.

2F., No.135, Ln. 235, Baoqiao Rd.,
Xindian Dist., New Taipei City 231,
Taiwan (R.O.C.)
TEL: +886-2-8919-2188
FAX: +886-2-8919-1699
E-mail: sales@onyx-healthcare.com
http://www.onyx-healthcare.com

Worldwide Offices

America

USA

Onyx Healthcare, USA Inc.

324W. Blueridge Ave. Orange, CA 92865, USA
TEL: +1-714-792-0774
FAX: +1-714-792-0481
E-mail: usasales@onyx-healthcare.com

Europe

Netherlands

Onyx Healthcare EUROPE B.V.

Primulalaan 42, 5582 GL Waalre,
The Netherlands
TEL: +31(0) 499-745600
E-mail: eusales@onyx-healthcare.com

Asia & China

China

Onyx Healthcare (Shanghai) INC.
E-mail: cnsales@onyx-healthcare.com



Driving New Medical Innovation



2020 Catalogue

Driving New Medical Innovation



www.onyx-healthcare.com

www.onyx-healthcare.com

Table of Contents

Table of Contents	01
About Onyx	02
OEM/ODM Service	03
Mobile Application Computing Solution	05
24" 24/7 Self-Power Cart Computer - Venus-243	07
24" 24/7 Self-Power Cart Computer with AMD Ryzen Embedded V1000 - Venus-243 AMD	09
22" 24/7 Self-Power Cart Computer - Venus-223 / Venus-222	11
22" 24/7 Self-Power Cart Computer with AMD Ryzen Embedded V1000 - Venus-223 AMD	13
19" 24/7 Self-Power Cart Computer - Venus-193	15
19" ~24" Self-Power Cart Computer Accessory Selection	17
17" 24/7 Mini Mobile Cart Computer- Venus-173	19
15" 24/7 Mini Mobile Computer- Venus-153	21
12" 24/7 Mini Mobile Computer- Venus-123	23
12"~ 17" Mini Mobile Computer Accessory Selection	25
Ubiquitous Power Solution	27
UPower Pro-22	29
UPower Lite-62	30
Battery / XL Battery / XXL Battery	31
ORION-Hospital IT Management Software Package	33
Mobile Medical Assistant	37
12" Rugged EMS Tablet - MD116 / MD116I	39
10.1" Rugged Medical Tablet - MD101	41
8" Medical Tablet - MPAD-800	43
7" Rugged Medical PDA- Julia J07	45
5" Rugged Medical PDA- Julia J05	46
MD116 Accessory Selection	47
Surgical and Server Level Workstation Solution	49
24" Fanless Smart View 7th Generation Core i7 Multi-Touch Medical Station - ZEUS-248	51
22" Fanless Smart View 7th Generation Core i7 Multi-Touch Medical Station - ZEUS-228	53
19" Fanless Smart View 7th Generation Core i7 Multi-Touch Medical Station - ZEUS-198	55
Operating Room Solution	57
32" 4K UHD Smart View 6th Generation Xeon / Core i7 Multi-Touch Surgical Station- ACCEL-A3201	59
27" 4K UHD Smart View 6th Generation Xeon / Core i7 Multi-Touch Surgical Station- ACCEL-A2701	61
32" 4K UHD Smart View AMD Ryzen Embedded V1000 Multi-Touch Surgical Station- ACCEL-A3202	63
27" 4K UHD Smart View AMD Ryzen Embedded V1000 Multi-Touch Surgical Station- ACCEL-A2702	65
32" 4K-UHD Medical LCD Monitor- ACCEL-M3201	67
Medical Video Management System with 9th Generation Intel Xeon / Core i7 CPU- ACCEL-VM500	68
Fanless Slim HIT PPC Solution	69
18.5" Fanless J1900 Quad Core Slim Medical Panel PC- BE182	71
17" Fanless J1900 Quad Core Slim Medical Panel PC- ONYX-1731	73
15.6" Fanless J1900 Quad Core Slim Medical Panel PC- ONYX-1531	75
11.6" Fanless J1900 Quad Core Slim Medical Panel PC- ONYX-1222	77
10.1" Fanless J1900 Quad Core Slim Medical Panel PC- ONYX-1022	79
Panel PC Accessory Selection	81
Medical AIO Solution	83
24" Fanless Core i7 Medical AIO- MATE-2405	85
22" Fanless Core i7 Medical AIO- MATE-2205	87
22" Fanless AMD Ryzen Embedded V1000 Medical AIO- MATE-2204	89
19" Fanless Core i7 Medical AIO- MATE-1903	91
Medical Display Series Solution	93
27" Fanless Slim Medical LCD Monitor- MEDDP-627	95
24" Fanless Slim Medical LCD Monitor - MEDDP-624	96
22" Fanless Slim Medical LCD Monitor - MEDDP-722	97
22" Fanless Slim Medical LCD Monitor - MEDDP-622	98
15.6" Fanless Slim Medical LCD Monitor- MEDDP-615	99
15" Fanless Slim Medical LCD Monitor- MEDDP-415	100
MedPC Series for Medical Equipment & OEM/ODM	101
High Performance Medical Grade Fanless Box PC with Intel 6/7th Generation Core™ i Series- MEDPC-9200	103
High Performance Medical Grade Box PC with AMD Ryzen Embedded V807B/V1605B- MEDPC-9300	105
High Performance Medical Grade Box PC with Intel 4th Generation Core™ i Series- MEDPC-5700	107
Fanless Medical Grade Box PC with Intel Cherry Trail Process- MEDPC-2700	109
Ultra slim Intel Bay Trail SoC Embedded Platform for HIT- MEDPC-2100	111
Intel Bay Trail SoC embedded platform for HIT- MEDPC-2000	113

Healthcare Infotainment Solution

18.5" Fanless Bedside Infotainment Touch Terminal - ONYX-BE182	117
15.6" Fanless Bedside Infotainment Touch Terminal - ONYX-1531	119
11.6" Fanless Bedside Infotainment Touch Terminal - ONYX-1222	121
15.6" Fanless Android Bedside Infotainment Touch Terminal - ONYX-BE153R	123
11.6" Fanless Android Bedside Infotainment Touch Terminal - ONYX-BE122R	125
10.1" Fanless Android Bedside Infotainment Touch Terminal - ONYX-BE102R	127
Healthcare Infotainment Accessory Selection	129

Medical Slim Motherboard for OEM/ODM

AMD Ryzen Embedded V1000 Medical Mini-ITX Motherboard- OMB-M322	132
Skylake Medical Mini ITX Motherboard- OBM-M228	133

115

131

About Onyx

Onyx Healthcare Inc. is a professional medical IT company in providing trusted, innovative products, customer-centric design services and medical pc solutions. Onyx cooperates closely with our partners to provide comprehensive medical products such as Smart View Medical Stations, Fanless Slim Panel PC, Medical Display, Healthcare Infotainment, Mobile Tablet PC, Medical PC and Mobile Computing Cart in the professional Hospital / Clinical IT market. Our products offer the advantages of filmless and paperless interaction in the hospital environment and all product solutions guarantee reliable quality (EN-60601-1 and UL-60601-1). In 2018/ 2019, Onyx has received notable awards such as the "Taiwan Excellence Award 2018 / 2019" in Venus series and ACCEL series and Mobile Tablet Assistant.



Product application focus: Hospital IT

» High-Acuity Task Area

The emergency department, Intensive care, labor and delivery units, neonatal ICUs, operating rooms, post-anesthesia care units, and the radiology department.

» Clinic/Nursing Station Area

PACs processing and daily hospital tasks.

» Outpatient Area

Patient monitoring and patient home care.

Feature Products :

» Medical IT

Advanced Medical Stations, Medical Grade Slim Panel PCs, Medical Grade Fanless Panel PCs.

» Medical Platform

Mobile Nursing Cart, Bedside Infotainment Terminal.

» Medical IT & Platform Accessory

Medical Grade Monitors, Medical Mounting Accessories.



Awards

The 25th National Award of Outstanding Small and Medium-sized Enterprises

Healthcare is an honored recipient today of the 25th National Award of Outstanding Small and Medium-sized Enterprises. The National Award of Outstanding Small and Medium Enterprises are seen as the Academy Awards (Oscars) for enterprises in Taiwan, representing the highest honor which can be granted to the winner in their industry.



The Rising Star Award



The Taiwan SMEs Innovation Award

Onyx Healthcare has recently won two awards from the Small and Medium Enterprise Administration, Ministry of Economic Affairs (SMEA/MOEA), R.O.C. In recognition of its excellence in global export trade, Onyx was given The Rising Star Award. For its Venus Series of mobile cart computers, the company received the Taiwan SMEs Innovation Award for performance in innovation and research development.

OEM / ODM Service

Onyx -Your Design & Manufacturing Kitchen

1st Choice of Medical Device OEM / ODM Partners

Full Experience of Medical Certifications:

No need to worry about the problem of getting documents. With internal and external test laboratories, our experienced LAB engineers with more 10 years make sure your product certified. Onyx can help you bring your market to USA, Europe and China quickly.

- ISO 9001:2015
- ISO 14001:2005
- ISO 13458:2016
- FCC Class A and Class B
- EN60601-1-2 :2015
- IEC 60601-1:2012
- FDA Class I
- CCC



Ready to Use Embedded Computing Platform:

Belonging to ASUS and Aaeon Group, Onyx provides rich and cutting edge motherboard technology to our clients. Do not worry about falling behind your competition. Your company will be the leader in the field.

- Off-the shelf miniITX motherboard solution
- Latest Computer-on Module (COM) solutions
- Single compact computer solutions (X86 and RISC ARM)
- Free of charge BIOS and driver service



Onyx Healthcare is the first company with EMC 4.0 / Safe 3.1 ready products

In the European Union, the Date of Withdrawal (DoW) of EN 60601-1:2006 (Safety Edition 3.0) is published as Dec. 31st 2017 and DoW of EN 60601-1-2:2007(EMC Edition 3.0) is published as Dec. 31st 2018. **All devices manufactured and imported into the EU are required to comply with EN 60601-1:2006/A1:2013 (Safety Edition 3.1) after year 2018 and EN 60601-1-2:2015 (EMC Edition 4.0) after year 2019.**

All Onyx products in mass production are compliant to Safety Edition 3.1 and EMC Edition 4.0 and please refer to the following product list.



Medical DMS Partner:

Onyx Design Manufacture Service (DMS) offers customers comprehensive product services from the creation of an initial design, through development to manufacturing, and including after-sales service. Onyx DMS combines these services through our extensive oversight process to guarantee unsurpassed product quality, dependability and robustness. Our strength as a medical technology leader lies in our close partnerships with Intel, AMD, and ASUS allowing us to gain early access to advanced technologies. Combined with superior supply-chain management and buying power, Onyx is able to provide single-source procurement across several industry sectors, benefiting our customers with uncompromised quality and services.



Mobile Cart Computing Solution

Onyx has developed an all in one panel computer that provides 24/7 non-stop service and offers true mobility. Venus, the medical portable computer, features dual hot swappable batteries system and universal mounting slots. The battery system allow users to replace one of the batteries without turning the computer off. Also, the dual batteries design supply a very long running time and short charging time. Lightweight design with Magnesium alloy rear cover provides high strength and great heat dissipation, and it has mounting slots that will fit any medical cart. Small features that come with the unit such as RFID, reading light bar, and smart card scanner come in handy for the operator.



- » Highest level of medical safety protection, EMC4.0 / Safety3.1
- » Built-in dual battery to provide Max 260Wh power for standing 18 hours operating.
- » Support running as 24/7 by swapping batteries.
- » With magnesium alloy rear cover provides high strength , light weight ,and great heat dissipation.
- » ORION, Hospital IT Management Software Package.
- » Hi-speed recharge, flexible mounting type

+ No pending for charging

Swappable batteries are small and light enough to be changed with one hand while also providing long-lasting, nonstop power.



+ Cleanability with Hospital Solvents

Venus Series was designed for using in hospital environment. The Front IP65 waterproof and non-gap design was made it more easy to be clean with hospital solvent, and fit almost all the cleaning strategies.



+ Easy to management remotely (ORION)

ORION, a hospital IT management software package. Remotely monitor battery status including charging cycles, temperature, capacity, and usage statistics, or set custom reminders.



+ TPM

A Trusted Platform Module increase privacy and security utilizing hardware-encryption with files to ensure sensitive information remains safe and secure.



+ External output

24W DC output connector supplies power to additional medical devices



+ Lightweight design

Magnesium alloy construction and 300g batteries ensure the unit is sturdy, yet easy to carry, position and handle.




Successful Story

The Venus-Mobile Cart Computer was chosen for use by our nursing staff at the Taiwan Chiang Kai-shek Memory Hospital. The swappable battery saves my time so I can spend more time taking care of more patients. I no longer need to push around a heavy cart from room to room or always look for a socket to charge the battery. I love the lightweight battery and cableless design of Venus which makes the cart lighter and gives me the mobility to move effortlessly and work efficiently. I recommend the Venus series as a practical and useful medical computer for nurses and hospitals.

Hospital : Chiang Kai-shek Memory Hospital
 Nurse : Lucy Wu
 Location : Taiwan
 Benefit : * Extremely
 * No idle time, Better Efficiency
 * Perfect battery SW



Venus
 Mobile Cart Computer

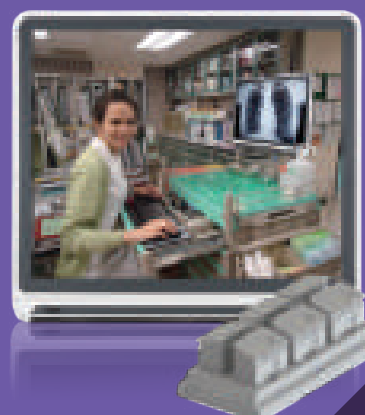

Mobile Cart Computer

Venus-243

24" 24/7 Self-Power Medical Cart Computer

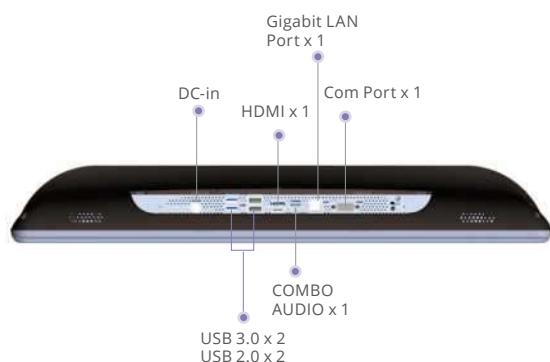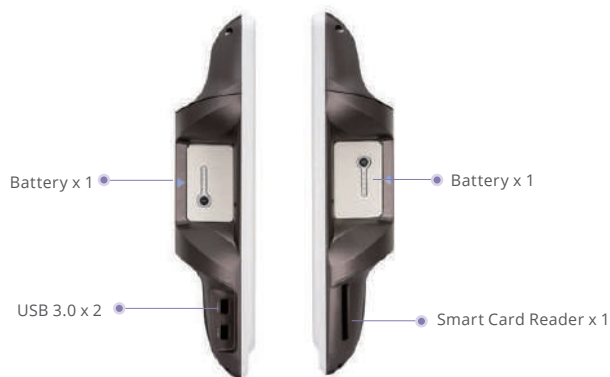

Features

- Highest level of medical safety protection , EMC4.0/ Safety 3.1
- Cleanability with Hospital Solvents (front IP65)
- Hot swappable design, support 24/7 run time
- Intel® Skylake Dual-Core i5
- Support remote monitor/control/update (ORION compatible)
- Lightweight design
- HDMI
- Front reading light bar

Specifications

Main Specifications

Processor	Intel® Skylake Dual-Core i5 / i7
System Memory	DDR4 up to 32GB
OS Support	Microsoft® Windows 7 Microsoft® Windows 8.1 Microsoft® Windows 10 Ubuntu 18.04 LTS IGEL (thin client solution)
Graphics	Intel® HD Graphics 520
Storage	SSD up to 512GB (optional)
Wireless Communication	802.11 ac/a/b/g/n + BT (optional)
Touch	PCT
Speaker	2W x2
Security	TPM 2.0 (Trusted Platform Module), Smart Card Reader, RFID ISO 15693/14443A (optional)

Display

Display Size	23.8" VA panel
Resolution	1920 x 1080
Max. Colors	16.7M
Contrast Ratio	3000:1
Luminance (cd/m2)	250

I/O

USB	Rear I/O: USB 3.0 x 2, USB 2.0 x 2 Side I/O : USB 3.0 x2
Video Out	HDMI out x1
COM	COM port x1
Audio	Combo audio port x1
Security	Kensington slot
Ethernet	Gigabit LAN x1
DC-in	24V DC-in x1


Mechanical and Environmental

VESA	75/100 mm VESA mount
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@40°C, non-condensing
Dimension	607(L) x 78(W) x 404(H) mm
Net Weight without Battery	8kg (17.6 lbs)
Packing Size	730(L) x 240(W) x 550(H) mm
Gross Weight	12kg (26.5 lbs)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

24" 24/7 Self-Power Cart Computer

Dimension / Unit: mm

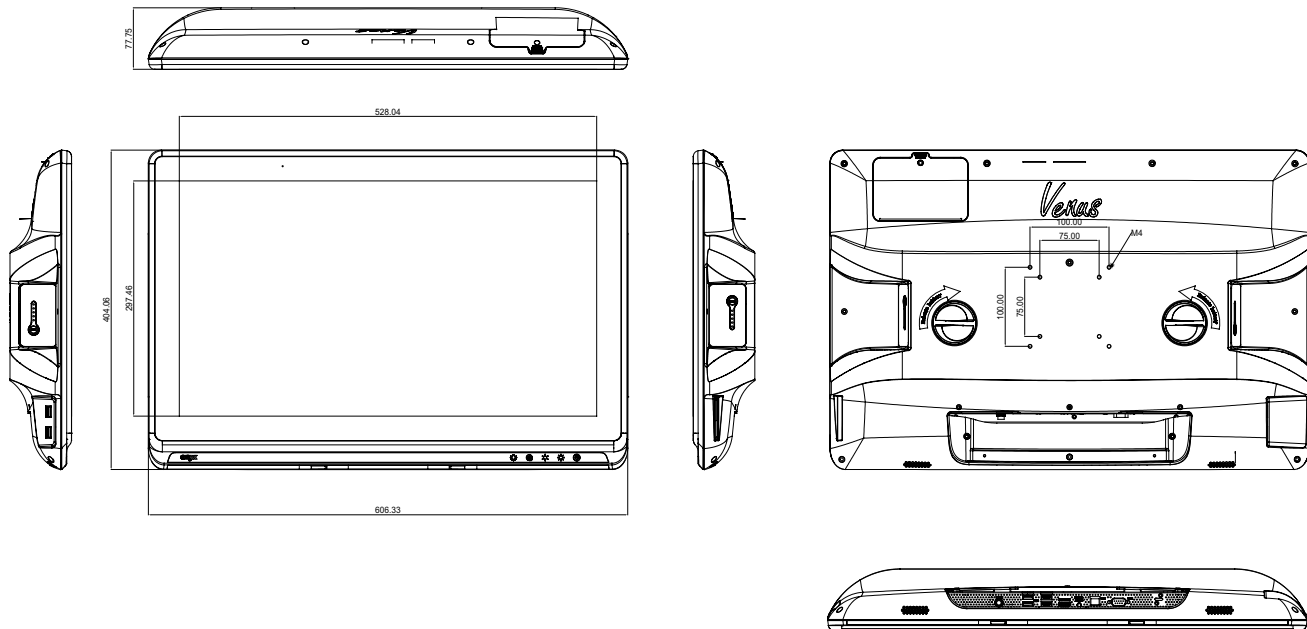

Ordering Information

- » VENUS-243ST-A5-1010
Cart Computer.i5.24".Fanless.PCT.4G RAM.SCR.TPM. XL Battery x2
- » VENUS-243E-A3-0402
Cart Computer.3955U. 24".Fanless.4G RAM.SCR.TPM. XL Battery x2



Optional Accessories

- | | |
|--|---|
| <ul style="list-style-type: none"> » 1255301501
Medical Adaptor. 100-240V/1.0-2.5A 24V/6.25A 150W » 968C128G3F
128G 2.5" SSD » OPM-S02R-A1
RFID Reader Kit » OPM-C10W-A8
WLAN dual band module kits. INTEL 802.11ac/a/b/g/n+BT | <ul style="list-style-type: none"> » OPM-C12W-A8
WLAN dual band module kits. Atheros 802.11a/b/g/n + BT 4.0 » UP-L62-A1-1010
6-Slot Charger + 24V/250W adaptor » UP-P22-A2-1010
2-Slot Charger + 24V Medical adaptor |
|--|---|

Mobile Cart Computer

Venus-243-AMD

24" 24/7 Self-Power Medical Cart Computer

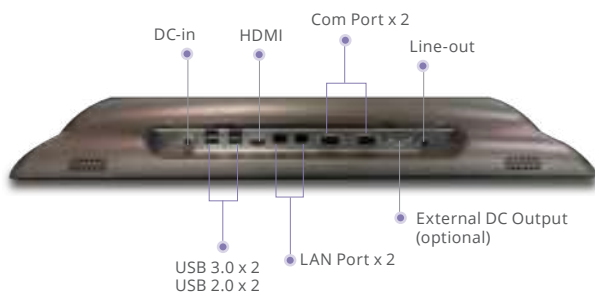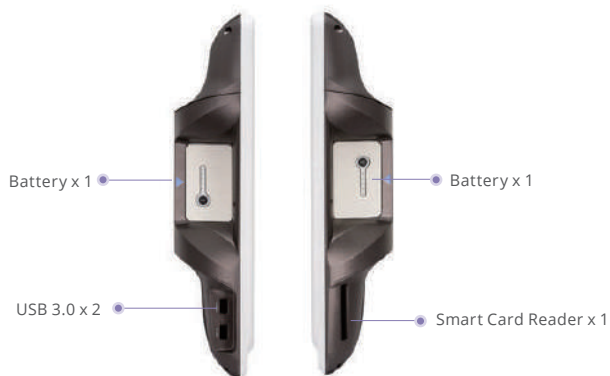

Features

- Medical grade certified (EN60601-1/UL60601-1)
- Cleanability with hospital solvents (front IP65/rear IPX1)
- Hot swappable design, support 24/7 run time
- AMD Ryzen™ V1202B / V1605B
- Support remote monitor/control/update (ORION compatible)
- Lightweight design
- Front reading light bar

Specifications

Main Specifications

Processor	AMD Ryzen™ V1202B / V1605B
System Memory	Up to DDR4 32GB
OS Support	Microsoft® Windows 10 pro (64bit) Microsoft® Windows 10 IOT Enterprise (64bit) Ubuntu 18.04 LTS
Storage	Up to 512 GB
Wireless Communication	802.11 ac/a/b/g/n + BT 4.0 (optional)
Touch	PCAP
Speaker	2W x2
	TPM2.0
Security	SmartCard Reader RFID ISO 15693 / 14443A (optional)

Display

Display Size	23.8" VA panel
Resolution	1920 x 1080
Max. Colors	16.7M
Contrast Ratio	3000:1
Luminance (cd/m2)	250

I/O

USB	Rear I/O : USB 3.0 x2, USB 2.0 x2 Side I/O : USB 3.0 x2
Video Out	HDMI
COM	COM port x2 (isolated optional)
Audio	Combo Audio port x1
Security	Kensington slot
Ethernet	Gigabit LAN x 2
DC-in	24V 2.5mm DC connector x1


Mechanical and Environmental

VESA	75/100 mm VESA mount
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@40°C, non-condensing
Dimension	607(L) x 78(W) x 404(H) mm
Net Weight without Battery	8kg (17.6 lbs)
Packing Size	730(L) x 240(W) x 550(H) mm
Gross Weight	12kg (26.5 lbs)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

24" 24/7 Self-Power Cart Computer

Dimension / Unit: mm

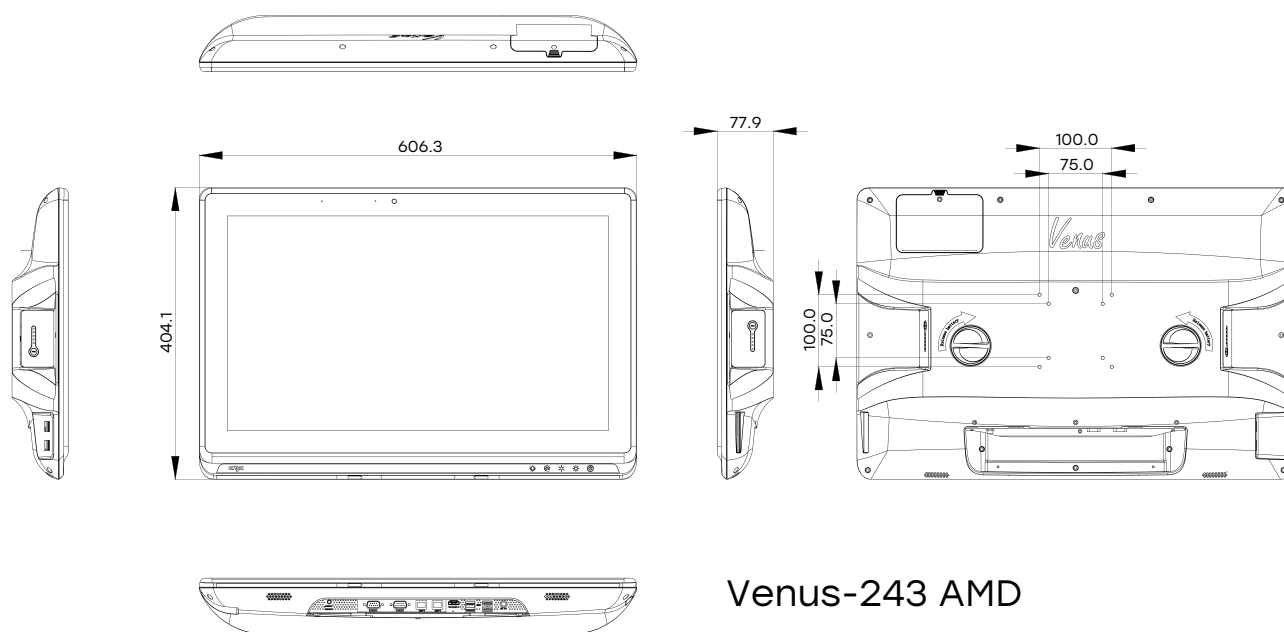

Venus-243 AMD



Ordering Information

- » VENUS-243-G12-A1-0402
Cart Computer.AMD V1202B . 24". 4G. SCR . TPM. XL Battery x2

Optional Accessories

- » 1255301501
Medical Adaptor. 100-240V/1.0-2.5A 24V/6.25A 150W
- » 968C128G3F
128G 2.5" SSD
- » OPM-S02R-A1
RFID Reader Kit
- » OPM-C10W-A8
WLAN dual band module kits. INTEL 802.11ac/a/b/g/n+BT
- » OPM-C12W-A8
WLAN dual band module kits. Atheros 802.11a/b/g/n + BT 4.0
- » UP-L62-A1-1010
6-Slot Charger + 24V/250W adaptor
- » UP-P22-A2-1010
2-Slot Charger + 24V Medical adaptor
- » OPM-V01C-02
2MP Camera Kit
- » OPM-V02C-01
5MP Camera Kit
- » OPM-P01D-01
9V / 12V / 24V DC output


Mobile Cart Computer

Venus-223 / Venus-222


22" 24/7 Self-Power Medical Cart Computer



Venus-223

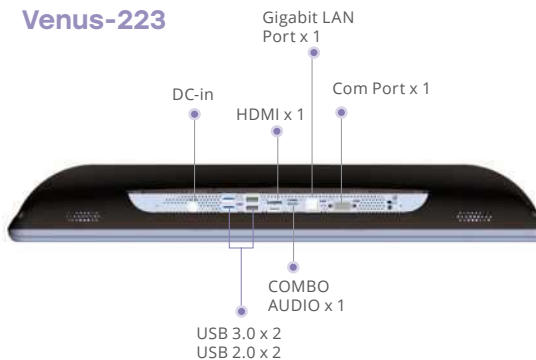

Venus-222

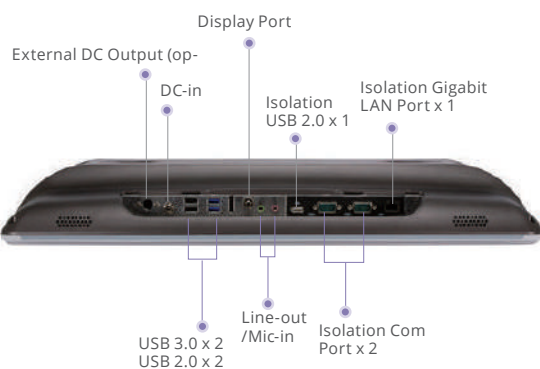

Features

- Highest level of medical safety protection
- Cleanability with hospital solvents (front IP65)
- Hot swappable design, support 24/7 run time
- Intel® Skylake Dual-Core i5 / Quad-Core J1900
- Support remote monitor/control/update (ORION compatible)
- Lightweight design
- Front reading light bar

Specifications

Main Specifications

	Venus-223	Venus-222
Processor	Intel® Skylake Dual-Core i5 /i7	Intel® Quad-Core J1900
System Memory	DDR4 up to 32GB	DDR3L up to 8G
OS Support	Microsoft® Windows 7 Microsoft® Windows 8.1 Microsoft® Windows 10 Ubuntu 18.04 LTS IGEL (thin client solution)	Microsoft® Windows 7 Microsoft® Windows 8.1 Microsoft® Windows 10 IGEL (thin client solution)
Graphics	Intel® HD Graphics 520	Intel® HD Graphics
Storage	SSD up to 512GB (optional)	
Wireless Communication	802.11 ac/a/b/g/n + BT 4.0 (optional)	
Camera	2MP/5MP camera (optional)	
Touch	PCT, R-TS (optional)	
Speaker	2W x2	
Security	TPM 2.0	TPM 1.2
	Smart Card Reader, RFID ISO 15693/14443A (optional)	
Auto Brightness	Light sensor	

Display

Display Size	21.5" VA panel
Resolution	1920 x 1080
Max. Colors	16.7M
Contrast Ratio	3000:1
Luminance (cd/m2)	250

I/O

USB	Rear I/O : USB 3.0 x2, USB 2.0 x2 Side I/O : USB 3.0 x2	Rear I/O : USB 3.0 x2, USB 2.0 x2, Isolated USB x1 Side I/O : USB 3.0 x2
Video Out	HDMI 1.4 x1	DP x1
COM	COM port x1	Isolated COM port x2
Audio	Combo audio port x1	Mic-in x1, Audio-out x1
Security	Kensington slot	N/A
Ethernet	Gigabit LAN x1	
DC-in	24V DC-in x1	


Mechanical and Environmental

VESA	75/100 mm VESA mount
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@40°C, non-condensing
Dimension	542(L) x 78(W) x 362(H) mm
Net Weight	7kg (15.4 lbs)
Packing Size	645(L) x 210(W) x 513(H) mm
Gross Weight	11kg (24.3 lbs)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

22" 24/7 Self-Power Cart Computer

Dimension / Unit: mm

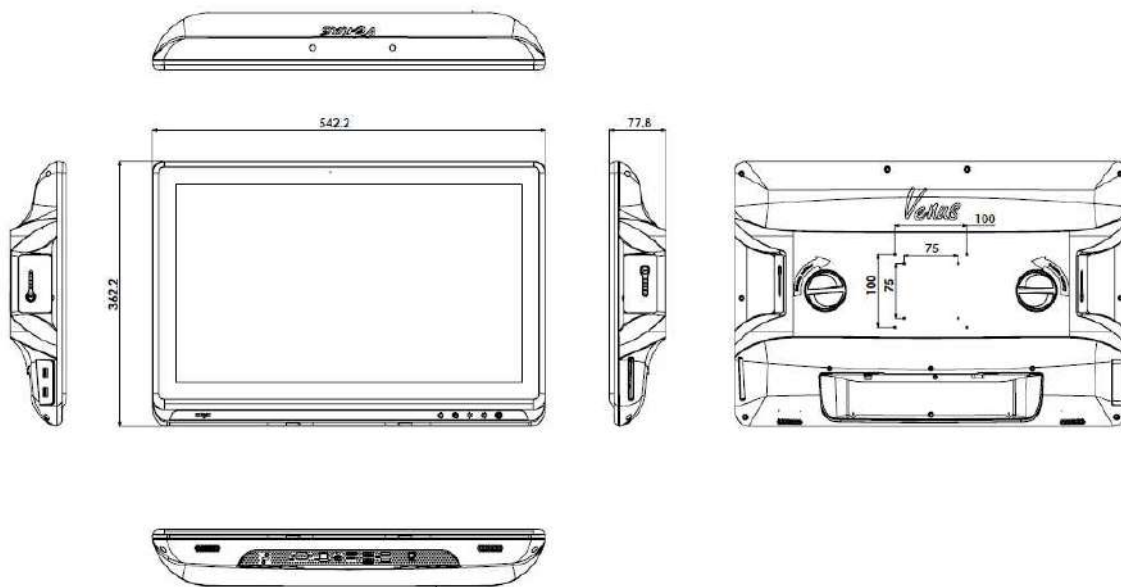

Ordering Information

- » VENUS-223ST-A5-1010
Cart Computer. i5 22". Fanless. PCT. 4G RAM. SCR. TPM. XL Battery x2
- » VENUS-223ET-A7-1010
Cart Computer. i7. 22". Fanless. R-TS. 4GB RAM. SCR. TPM. XL . Battery x2
- » VENUS-222ET-A1-1010
Cart Computer. J1900. 22". Fanless. R-TS. 4GB RAM. SCR. TPM. Battery x2



Optional Accessories

- | | |
|--|---|
| <ul style="list-style-type: none"> » 1255301501
Medical Adaptor. 100-240V/1.0-2.5A 24V/6.25A 150W » 968C128G3F
128G 2.5" SSD » OPM-S02R-A0
RFID Reader Kit » OPM-C10W-A8
WLAN dual band module kits. INTEL 802.11ac/a/b/g/n+BT » OPM-C12W-A8
WLAN dual band module kits. Atheros 802.11a/b/g/n + BT 4.0 | <ul style="list-style-type: none"> » UP-L62-A1-1010
6-Slot Charger + 24V/250W adaptor » UP-P22-A2-1010
2-Slot Charger + 24V Medical adaptor » OPM-V01C-02
2MP Camera Kit » OPM-V02C-01
5MP Camera Kit |
|--|---|

Mobile Cart Computer

Venus-223-AMD

22" 24/7 Self-Power Medical Cart Computer

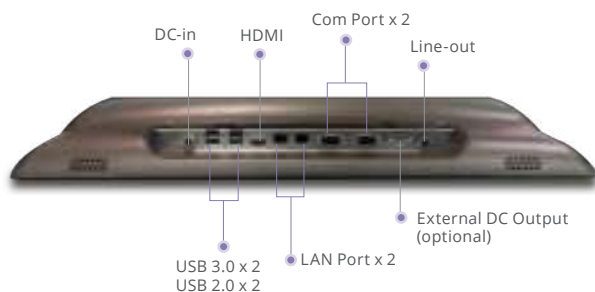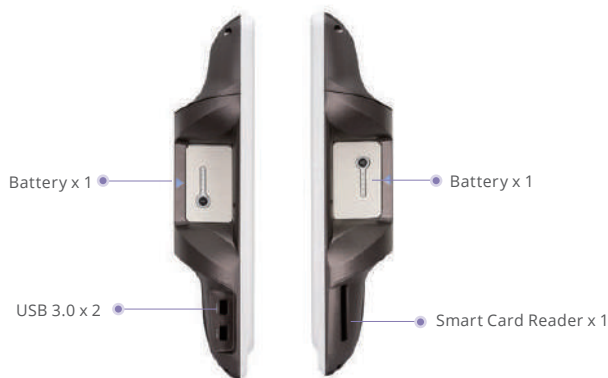

Features

- Medical grade certified (EN60601-1/UL60601-1)
- Cleanability with hospital solvents (front IP65/rear IPX1)
- Hot swappable design, support 24/7 run time
- AMD Ryzen™ V1202B / V1605B
- Support remote monitor/control/update (ORION compatible)
- Lightweight design
- Front reading light bar

Specifications

Main Specifications

Processor	AMD Ryzen™ V1202B / V1605B
System Memory	Up to DDR4 32GB
OS Support	Microsoft® Windows 10 pro (64bit) Microsoft® Windows 10 IOT Enterprise (64bit) Ubuntu 18.04 LTS
Storage	Up to 512 GB
Wireless Communication	802.11 ac/a/b/g/n + BT 4.0 (optional)
Touch	PCAP, R-TS(optional)
Speaker	2W x2
	TPM2.0
Security	SmartCard Reader RFID ISO 15693 / 14443A (optional)

Display

Display Size	21.5" VA panel
Resolution	1920 x 1080
Max. Colors	16.7M
Contrast Ratio	3000:1
Luminance (cd/m2)	250

I/O

USB	Rear I/O : USB 3.0 x2, USB 2.0 x2 Side I/O : USB 3.0 x2
Video Out	HDMI
COM	COM port x2 (isolated optional)
Audio	Combo Audio port x1
Security	Kensington slot
Ethernet	1kv isolated Gigabit LAN x 2
DC-in	24V 2.5mm DC connector x1


Mechanical and Environmental

VESA	75/100 mm VESA mount
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@40°C, non-condensing
Dimension	542(L) x 78(W) x 362(H) mm
Net Weight	7kg (15.4 lbs)
Packing Size	645(L) x 210(W) x 513(H) mm
Gross Weight	11kg (24.3 lbs)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

22" 24/7 Self-Power Cart Computer

Dimension / Unit: mm

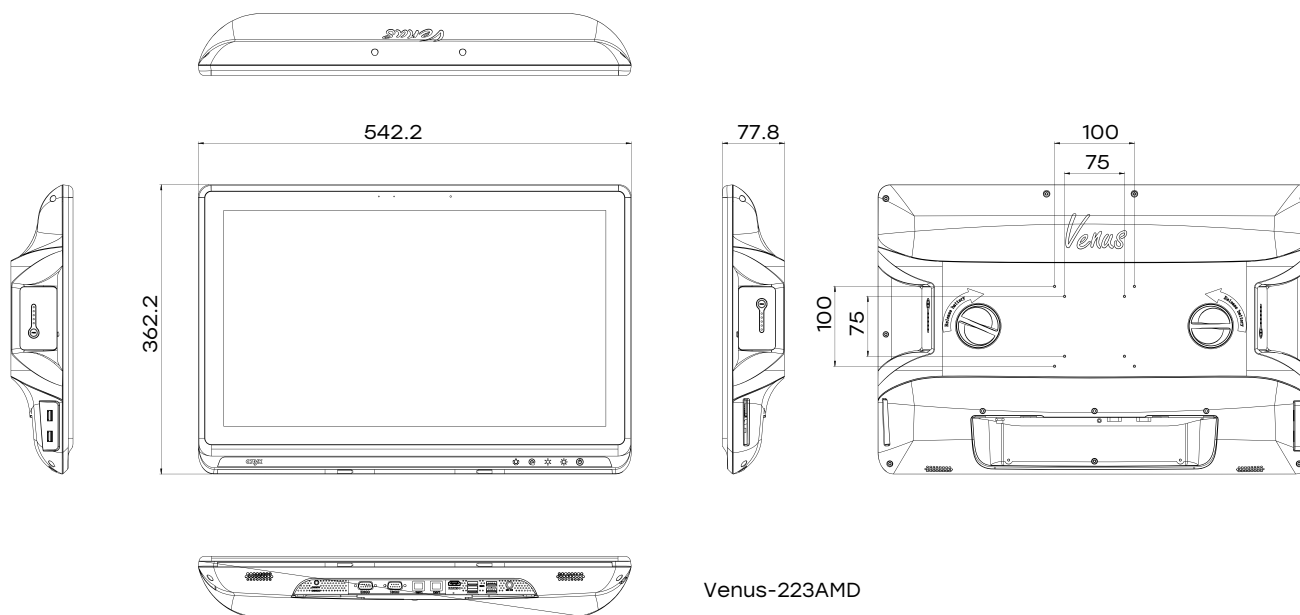

Ordering Information

- » VENUS-223-G12-A1-0402
Cart Computer.AMD V1202B. 22".4G RAM.SCR.TPM.XL Battery x2



Optional Accessories

- » 1255301501
Medical Adaptor. 100-240V/1.0-2.5A 24V/6.25A 150W
- » 968C128G3F
128G 2.5" SSD
- » OPM-S02R-A0
RFID Reader Kit
- » OPM-C10W-A8
WLAN dual band module kits. INTEL 802.11ac/a/b/g/n+BT
- » OPM-C12W-A8
WLAN dual band module kits. Atheros 802.11a/b/g/n + BT 4.0
- » UP-L62-A1-1010
6-Slot Charger + 24V/250W adaptor
- » UP-P22-A2-1010
2-Slot Charger + 24V Medical adaptor
- » OPM-V01C-02
2MP Camera Kit
- » OPM-V02C-01
5MP Camera Kit
- » OPM-P01D-01
9V / 12V / 24V DC output

Mobile Cart Computer

Venus-193

19" 24/7 Self-Power Cart Computer

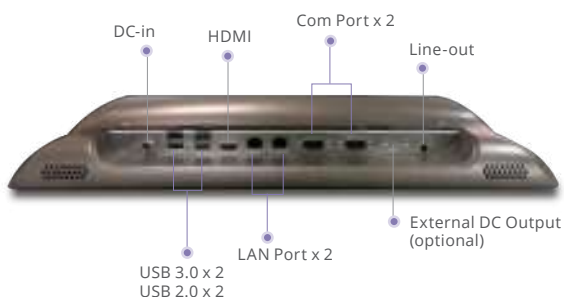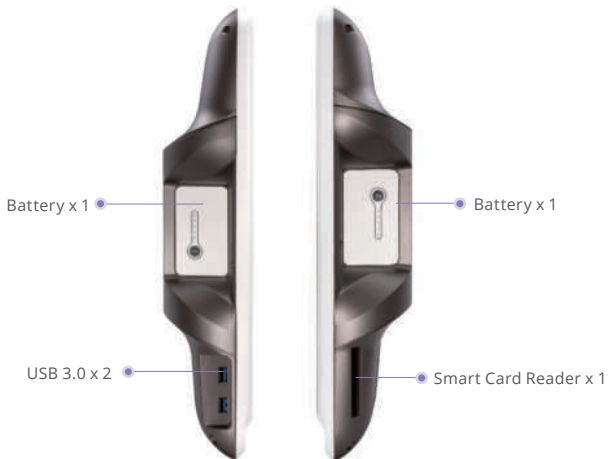

Features

- Highest level of medical safety protection
- Cleanability with hospital solvents (front IP65)
- Hot swappable design, support 24/7 run time
- Intel® Skylake Dual-Core i5 / Celeron 3955U
- Support remote monitor/control/update (ORION compatible)
- Lightweight design
- Front reading light bar

Specifications

Main Specifications

Processor	Intel® Skylake Dual-Core i5 / i7 , Celeron 3955U
System Memory	DDR4 up to 32GB
OS Support	Microsoft® Windows 7 Microsoft® Windows 8.1 Microsoft® Windows 10 (64bit) Ubuntu 18.04 LTS IGEL (thin client solution)
Graphics	Intel® HD Graphics 520
Storage	SSD up to 512GB (optional)
Wireless Communication	802.11 ac/a/b/g/n + BT 4.0 (optional)
Touch	R-TS
Speaker	2W x2
Security	TPM 2.0 Smart Card Reader, RFID ISO 15693/14443A (optional)
Auto Brightness	Light sensor

Display

Display Size	19" panel
Resolution	1280 x 1024
Max. Colors	16.7M
Contrast Ratio	1000:1
Luminance (cd/m2)	250

I/O

USB	Rear I/O : USB 3.0 x2, USB 2.0 x2 Side I/O : USB 3.0 x2
Video Out	HDMI 1.4 x1
COM	COM port x2
Audio	Combo audio port x1
Ethernet	Gigabit LAN x2
DC-in	24V DC-in x1


Mechanical and Environmental

VESA	75/100 mm VESA mount
Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Storage Humidity	10%~95%@40°C, non-condensing
Dimension	429(L) x 78(W) x 384(H) mm
Net Weight	5.5kg (12.13 lbs)
Packing Size	540(L) x 205(W) x 503(H) mm
Gross Weight	9kg (19.84 lbs)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

19" 24/7 Self-Power Cart Computer

Dimension / Unit: mm

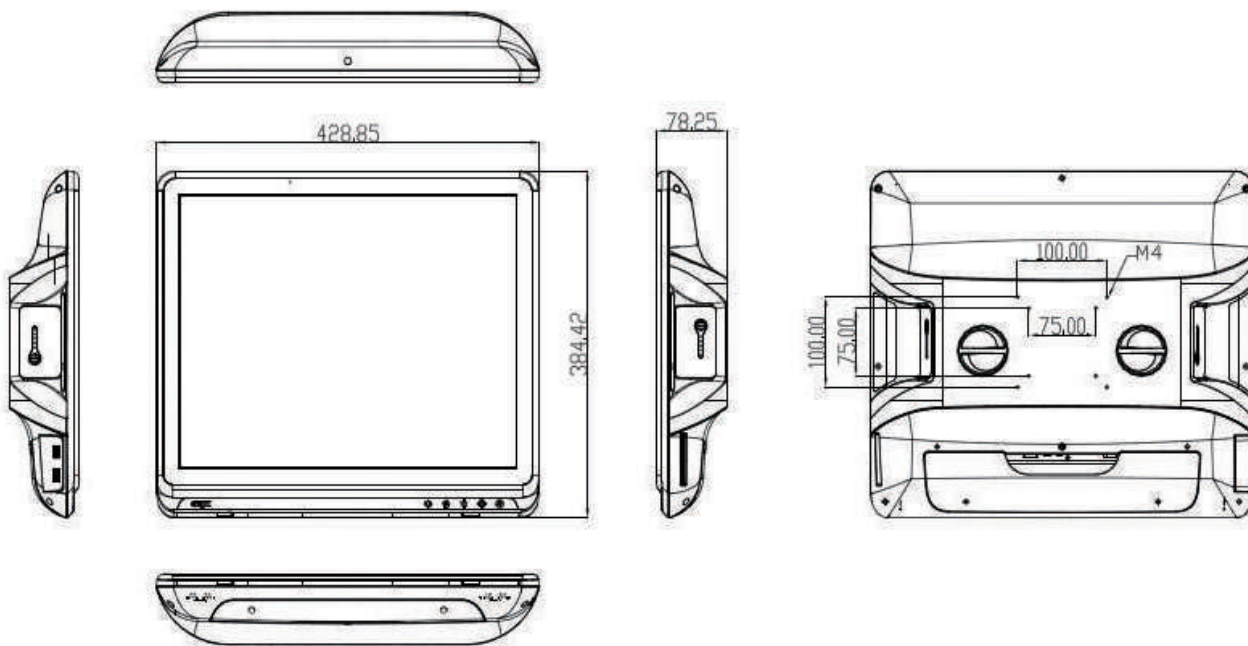

Ordering Information

» VENUS-193ET-A6-1010

Cart Computer, i5, 19", Fanless, R-TS, 4GB .SCR, TPM, XL Battery x 2

Optional Accessories

» 1255301501

Medical Adaptor, 100-240V/1.0-2.5A 24V/6.25A 150W

» 968C128G3F

128G 2.5" SSD

» OPM-S02R-A2

RFID Reader Kit

» OPM-C10W-A9

WLAN dual band module kits. INTEL 802.11ac/a/b/g/n + BT

» OPM-C12W-A9

WLAN dual band module kits. Atheros 802.11a/b/g/n + BT 4.0

» UP-L62-A1-1010

6-Slot Charger +24V/250W adaptor

» UP-P22-A2-1010

2-Slot Charger + 24V Medical adaptor

» OPM-P01D-01

9V / 12V / 24V DC output

» OPM-V01C-02

2MP Camera Kit

19"~24" Self-Power Cart Computer

OPM-P01T

2 Battery kit. Lithium-ion 3S2P battery pack. 10.8V



Specifications

Battery Type	3S2P / 6 Cell Lithium-ion battery
Battery Voltage	10.8V
Battery Capacity	5700 mAh / 61.56Wh
Warranty	1 year
Certification	UL,CE,IEC-60950-1,IEC-62133-1

Mechanical and Environmental

Dimension	84(L)x79(w)x48(H) mm
Weight	350g/pcs
Gross Weight	0.9kg(1.98 lbs)
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)

Ordering Information

» OPM-P01T-03
2 Battery Kit. Li-ion 3S2P, 10.8V, 5700mAh. Volume Order (via Ocean)

OPM-P02T

2 XL Battery Li-ion 10.95V 8550mAh



Specifications

Main Specifications

Battery Type	3S3P / 9 Cell Li-ion battery
Battery Voltage	10.95V
Battery Capacity	8550mAh / 93.62Wh
Warranty	1 year
Certification	UL, CE, IEC-60950-1, IEC-62133-1

Mechanical and Environmental

Dimension	122(L) x 79(W) x 50 (H) mm
Net Weight	504g /pcs
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)

Ordering Information

» OPM-P02T-03
2 XL Battery Kit. Li-ion 3S3P, 10.95V, 8550mAh. Volume Order (via Ocean)

OPM-P03T

2 XXL Battery Kit. Li-ion. 10.8V. 12060mAh



Specifications

Main Specifications

Battery Type	3S4P / 12 Cell Li-ion battery
Battery Voltage	10.8V
Battery Capacity	12060mAh / 130.2Wh
Warranty	2 year , 1000 cycle
Certification	UL, CE, IEC-60950-1, IEC-62133-1

Mechanical and Environmental

Dimension	137(L) x 79(W) x 48 (H) mm
Net Weight	690g (1.52lbs)/pcs
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)

Ordering Information

» OPM-P03T
2 XXL Battery Kit. Li-ion , 10.8V, 12060mAh. (via Ocean)

Mobile Cart Computer

19"~24" Self-Power Cart Computer

Accessory Selection

UP-P22

2-slot battery charger



Features

- Compatible with short battery and long battery (XL)
- Max 100W power output, mini-din 4pin x1 LED
- 10W USB port x1 (power output only)
- Battery information monitor remotely (ORION)
- Support wall/cart mount. Fitting all environment
- LED indicator, clearly reveal recharge/discharge status

Specifications

Battery Charge Time	3hrs for standard battery; 3.5hrs for XL battery
Input Power	24V Medical adaptor
Protection	Supports protection from over-voltage (input), over-current (input and output), short circuit, over-charge.
IO interface	Mini-din 4pin x1; USB Type A x1 (Power output only); USB micro-B x1 (Data transport only); DC-in
Certification	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

Mechanical and Environmental

Color	White
Dimension	191(L) x 64(W) x 117(H) mm
Net Weight	0.67kg (1.47 lbs)
Packing Size	390(L) x 290(W) x 110(H) mm
Gross Weight	2kg (4.41 lbs)
Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)

Ordering Information

- » UP-P22-A2-1010
2-slot charger. 24V medical adaptor

OPM-P01C

6 -slot battery charger



Features

- Battery information monitor remotely (ORION)
- Capable of charging 6 batteries simultaneously
- 6 Independent LED indicators, clearly reveal recharge status
- High-speed recharge and over charge protection

Specifications

Main Specifications

Battery Charge Time	2.5 hrs for 85%, 3.5 hrs for 100%
Input Power	24V Medical adaptor
Protection	Supports protection from over-voltage (input), over-current (input and output), short circuit, over-charge.
IO interface	USB TypeA x 1 (Data transport only), DC-in x 1
Certification	CE, FCC

Mechanical and Environmental

Color	White
Dimension	304(L) x 154(W) x 41(H) mm
Net Weight	1.16kg (2.56 lbs)
Packing Size	470(L) x 380(W) x 100(H) mm
Gross Weight	3kg (6.61 lbs)
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)

Ordering Information

- » OPM-P01C-03
6-slot charger. 24V/250W adaptor

Mobile Application Computer

Venus-173

17" 24/7 Mini Mobile Cart Computer



LCD Brightness Control


Power On/Off

Speaker Volume Control



Swappable
Battery Pack
x 1

Swappable
Battery Pack
x 1

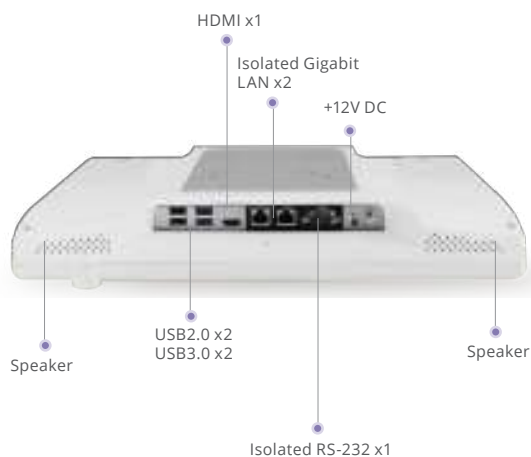

HDMI x1

Isolated Gigabit
LAN x2

+12V DC

USB2.0 x2
USB3.0 x2

Isolated RS-232 x1

Speaker

Speaker

Features

- Highest level of medical safety protection , EMC4.0/ Safety 3.1
- Cleanability with hospital solvents
- Hot swappable design, support 24/7 run time
- Intel® Skylake Dual-Core i5
- Support remote monitor/control/update (ORION compatible)
- isolated LAN / COM port

Specifications

Main Specifications

Processor	Intel® Skylake Dual-Core i5
System Memory	DDR4 up to 16GB
OS Support	Microsoft® Windows 7 (32bit/64bit)
	Microsoft® Windows 8.1 (64bit)
	Microsoft® Windows 10 (64bit)
	Ubuntu 18.04 LTS
	IGEL (thin client solution)
Graphics	Intel® HD Graphics 520
Storage	M.2 SSD up to 512GB (optional)
Wireless Communication	802.11 ac/a/b/g/n + BT 4.0 (optional)
Touch	R-TS
Speaker	3W x2
Security	TPM 2.0

Display

Display Size	17"
Resolution	1280 x 1024
Max. Colors	16.7M
Contrast Ratio	1000:1
Luminance (cd/m2)	250

I/O

USB	USB 3.0 x2, USB 2.0 x2
Video Out	HDMI 1.4 x1
COM	COM port x1
Ethernet	Gigabit LAN x 2
DC-in	12V DC-in x1


Mechanical and Environmental

VESA	75/100 mm VESA mount
Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@40°C, non-condensing
Dimension	384(L) x 68(W) x 345(H) mm
Net Weight	4.5kg
Packing Size	510(L) x 200(W) x 480(H) mm
Gross Weight	5.6 Kg
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013(V3.1)
	FCC: Part 18 Class B
	UL: ANSI/AAMI ES60601-1:2012 (V3.1)
	cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

17" 24/7 Mobile Computer

Dimension / Unit: mm

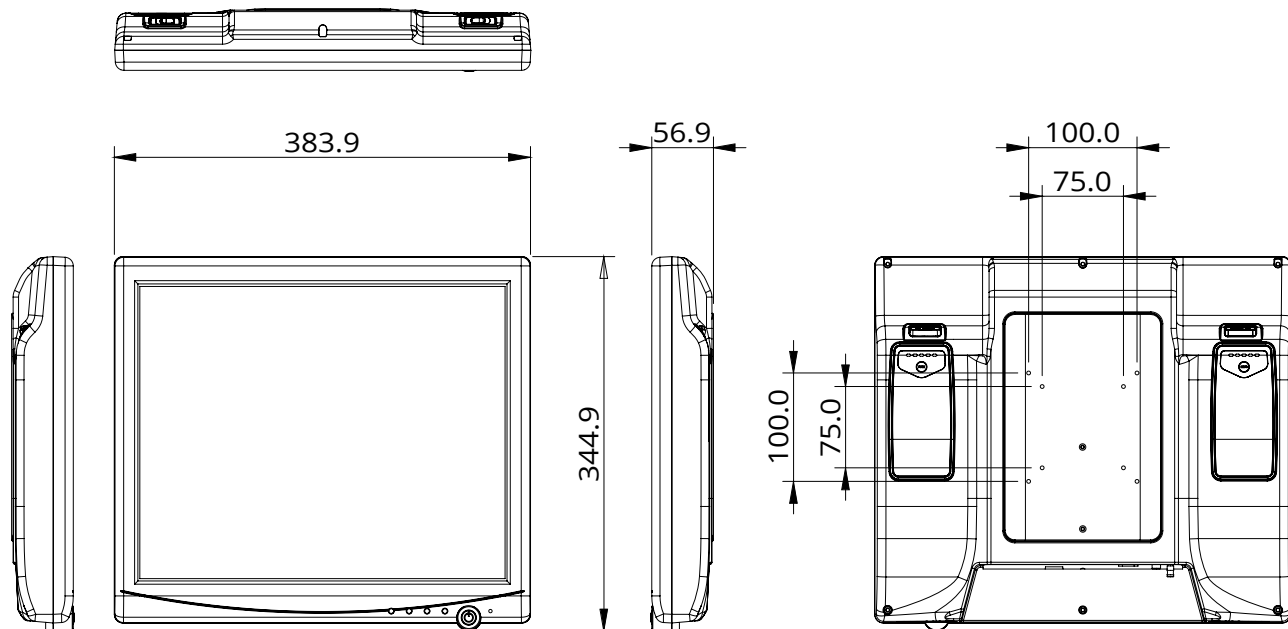

Ordering Information

- » VENUS-173-R62-A1-0001
Mobile Computer , i5 6200U ,17" Fanless, R-TS . TPM . Battery x 2


Optional Accessories

- » 1757306039
Medical Adaptor , 12V/60W
- » DDR4-04G-001
DDR4 4GB RAM
- » 968C128G3J
128G M.2 SSD
- » OPM-C10W-A5
WLAN dual band module kits , Intel 802.11 ac/a/b/g/n + BT 4.2
- » OPM-C12W-A5
WLAN dual band module kits , Atheros 802.11 a/b/g/n + BT 4.0
- » UP-M62-A1-1010
6-Slot Charger + 24V / 120W adaptor

Mobile Application Computer

Venus-153

15" 24/7 Mini Mobile Cart Computer

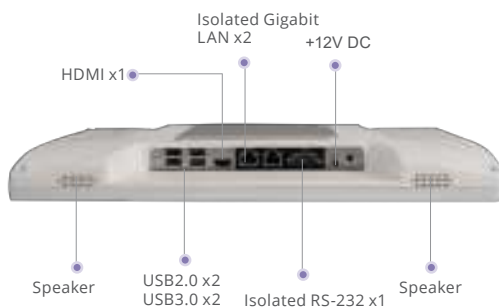

Features

- Highest level of medical safety protection , EMC4.0/ Safety 3.1
- Cleanability with hospital solvents
- Hot swappable design, support 24/7 run time
- Intel® Skylake Dual-Core i5
- Support remote monitor/control/update (ORION compatible)
- isolated LAN / COM port

Specifications

Main Specifications

Processor	Intel® Skylake Dual-Core i5 / Celeron 3955U
System Memory	DDR4 up to 16GB
OS Support	Microsoft® Windows 7 Microsoft® Windows 8.1 Microsoft® Windows 10 Ubuntu 18.04 LTS IGEL (thin client solution)
Graphics	Intel® HD Graphics 520
Storage	M.2 SSD up to 512GB (optional)
Wireless Communication	802.11 ac/a/b/g/n + BT 4.0 (optional)
Touch	Project Capacitive Touch / Resistive Touch
Speaker	3W x2
Security	TPM 2.0

Display

Display Size	15.6"
Resolution	1920 x 1080
Max. Colors	16.7M
Contrast Ratio	500:1
Luminance (cd/m2)	220

I/O

USB	USB 3.0 x2, USB 2.0 x2
Video Out	HDMI x1
COM	COM port x1
Ethernet	Gigabit LAN x 2
DC-in	12V DC-in x1


Mechanical and Environmental

VESA	75/100 mm VESA mount
Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@40°C, non-condensing
Dimension	392(L) x 43(W) x 265(H) mm
Net Weight	2.7kg
Packing Size	520(L) x 190(W) x 400(H) mm
Gross Weight	4.7 Kg
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

15" 24/7 Mobile Computer

Dimension / Unit: mm

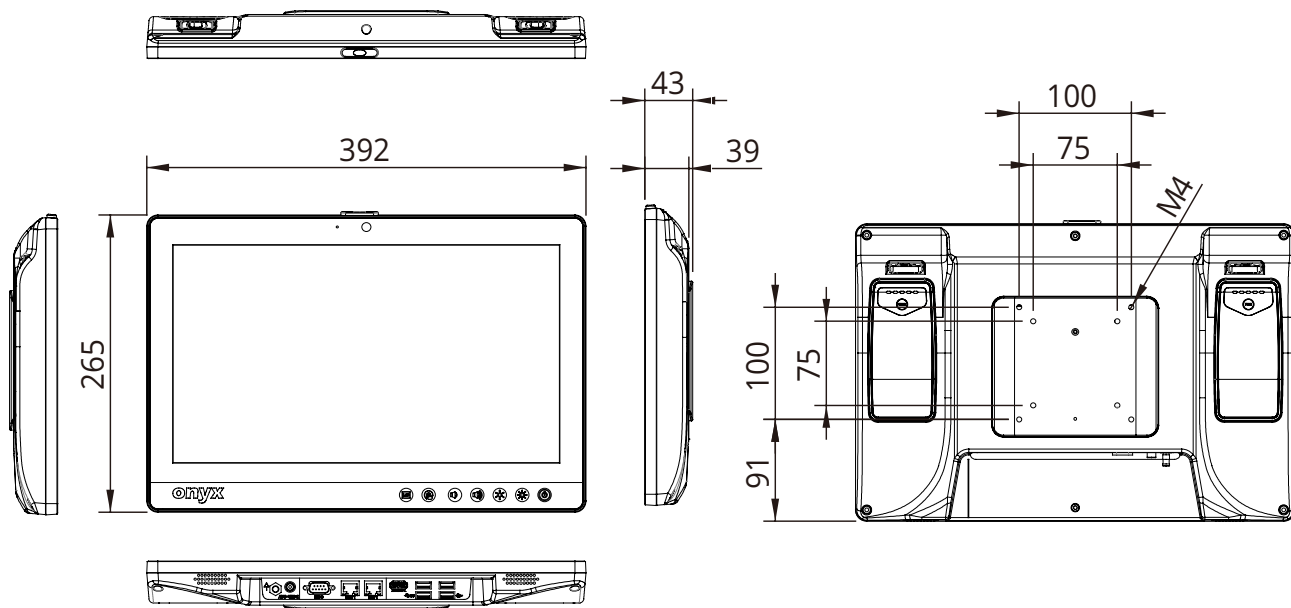

Ordering Information

- » VENUS-153-R62-A1-0001
Mobile Computer , i5 6200U , 15.6" Fanless, R-TS . TPM . Battery x 2
- » VENUS-153-P39-A1-0001
Mobile Computer , i5 3955U , 15.6" Fanless, PCAP . TPM . Battery x 2


Optional Accessories

- | | |
|--|--|
| <ul style="list-style-type: none"> » 1757306039
Medical Adaptor , 12V/60W » DDR4-04G-001
DDR4 4GB RAM » 968C128G3J
128G M.2 SSD » 968C256G3F
256G M.2 SSD » OPM-C10W-A5
WLAN dual band module kits , Intel 802.11 ac/a/b/g/n + BT 4.2 » OPM-C12W-A5
WLAN dual band module kits , Atheros 802.11 a/b/g/n + BT 4.0 | <ul style="list-style-type: none"> » UP-M62-A1-1010
6-Slot Charger + 24V / 120W adaptor » OPM-V01C-04
2M Camera kit with Mic |
|--|--|

Mobile Application Computer

Venus-123

12" 24/7 Mini Mobile Cart Computer

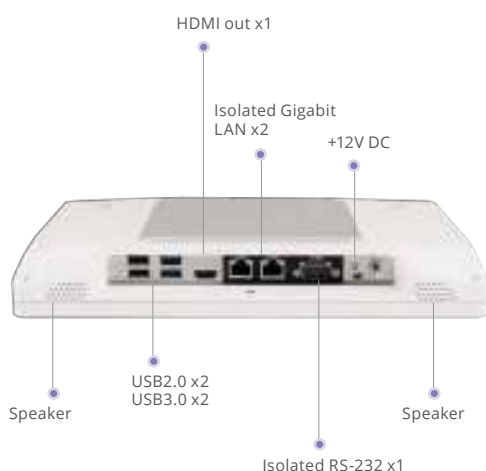

Features

- Highest level of medical safety protection , EMC4.0/ Safety 3.1
- Cleanability with hospital solvents
- Hot swappable design, support 24/7 run time
- Intel® Skylake Dual-Core i5
- Support remote monitor/control/update (ORION compatible)
- isolated LAN / COM port

Specifications

Main Specifications

Processor	Intel® Skylake Dual-Core i5 /Celeron 3955U
System Memory	DDR4 up to 16GB
OS Support	Microsoft® Windows 7 Microsoft® Windows 8.1 Microsoft® Windows 10 Ubuntu 18.04 LTS IGEL (thin client solution)
Graphics	Intel® HD Graphics 520
Storage	M.2 SSD up to 512GB (optional)
Wireless Communication	802.11 ac/a/b/g/n + BT 4.0 (optional)
Touch	Project Capacitive Touch / Resistive Touch
Speaker	3W x2
Security	TPM 2.0

Display

Display Size	11.6"
Resolution	1366 x 768
Max. Colors	262K
Contrast Ratio	500:1
Luminance (cd/m2)	250

I/O

USB	USB 3.0 x2, USB 2.0 x2
Video Out	HDMI out x1
COM	COM port x1
Ethernet	Gigabit LAN x 2
DC-in	12V DC-in x1


Mechanical and Environmental

VESA	75/100 mm VESA mount
Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@40°C, non-condensing
Dimension	300(L) x 43(W) x 205(H) mm
Net Weight	1.9kg
Packing Size	420(L) x 185(W) x 345(H) mm
Gross Weight	2.6 Kg
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

12" 24/7 Mobile Computer

Dimension / Unit: mm

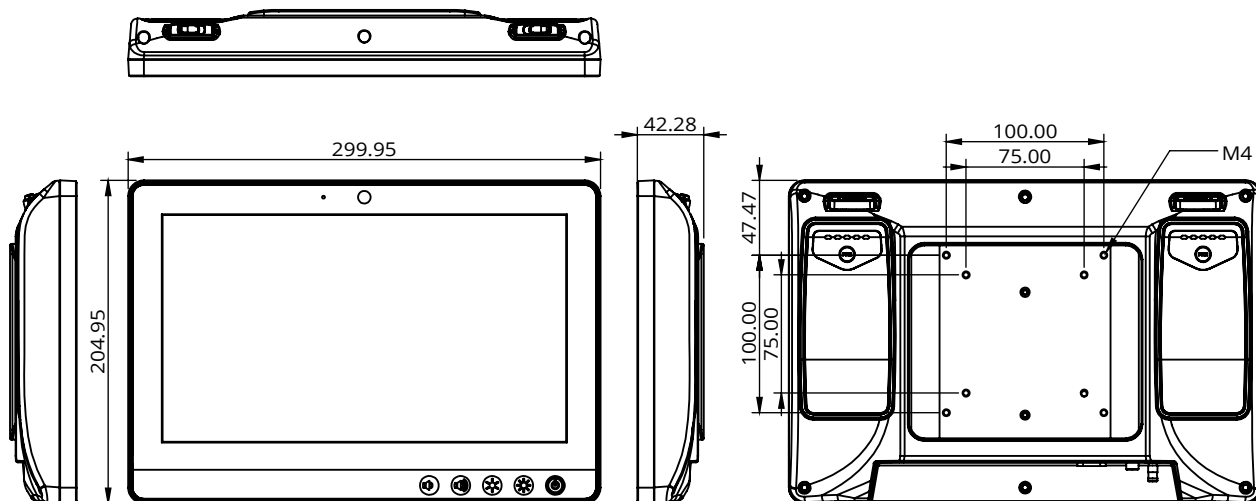

Ordering Information

- » VENUS-123-R62-A1-0001
Mobile Computer , i5 6200U ,11.6" Fanless, R-TS . TPM . Battery x 2
- » VENUS-123-P62-A1-0001
Mobile Computer , i5 6200U ,11.6" Fanless, Pcap . TPM . Battery x 2
- » VENUS-123-P39-A1-0001
Mobile Computer ,3955U ,11.6" Fanless, Pcap . TPM . Battery x 2

Optional Accessories

- » 1757306039
Medical Adaptor , 12V/60W
- » DDR4-04G-001
DDR4 4GB RAM
- » 968C128G3J
128G M.2 SSD
- » 968C256G3F
256G M.2 SSD
- » OPM-C10W-A4
WLAN dual band module kits , Intel 802.11 ac/a/b/g/n + BT 4.2
- » OPM-C12W-A4
WLAN dual band module kits , Atheros 802.11 a/b/g/n/ac+ BT 4.1
- » UP-M62-A1-1010
6-Slot Charger + 24V / 120W adaptor
- » OPM-V01C-03
2MP Camera Kit with Mic

12"~ 17" Mini Mobile Computer Accessory Selection

OPM-P05T

Venus-123/153/173 Battery Packs (2x)



Specifications

Battery Type	253P / 6 Cell Lithium-ion battery
Battery Voltage	7.2V
Battery Capacity	4545 mAh / 32.72Wh
Warranty	1 year
Certification	UL,CE,IEC-60950-1,IEC-62133-1

Mechanical and Environmental

Color	White
Dimension	127(L) x 60(w) x 21(H) mm
Net Packing Size	199(L) x 175(w) x 42(H) mm
Weight	305g/pcs
Gross Weight	0.9kg(1.98 lbs)
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)

Ordering Information

- » OPM-P05T-A4
Battery Kits (2x) 253P/7.2V for Venus-123/153/173

UP-M62

Venus-123/153/173 6-slots Charger



Optional Accessories

Part Number	UP-M62
Description	Battery Charger
Input Power	24V
Installations	Stationary
IO	1x Micro USB (Client) 1x DC-In
LED Indicator	Flickering Blue: Battery Charging Steady Blue: Battery Fully Charged Flickering Purple Green: Error
Dimensions	245.95 x 124.64 x 143.65mm
Weight	860g
Operating Temperature	-0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)

Ordering Information

- » UP-M62-A1-1010
6-slots Charger for Venus-123/153/173



Ubiquitous Power Solution

The genius of the UPower system is in its unique, groundbreaking design. UPower gives you the capability of providing endless power with an innovative dual hot swappable battery architecture that ensures your device remains powered even while you are replacing a battery.

UPower Pro-22 include a voltage selection DC-output that allows users to select the desired voltage setting. Users can select from 12, 19, or 24 volts based on their additional power requirements.

UPower





Key Features

- » External DC output (2 slot only)
- » Selected voltage (12V / 19V / 24V) (2 slot only)
- » Non-stop, Dual hot swappable batteries architecture
- » Software (ORION) remote monitor
- » Capable of charging 2/6 batteries simultaneously.
- » 2/6 Independent LED indicators, clearly reveal recharge status
- » High-speed recharge and over charge protection

UPower

Dual Swappable Batteries

Our UPower give you the capability of providing endless power with its unique swappable battery architecture. You will never again be in danger of losing power when it is most critically needed.

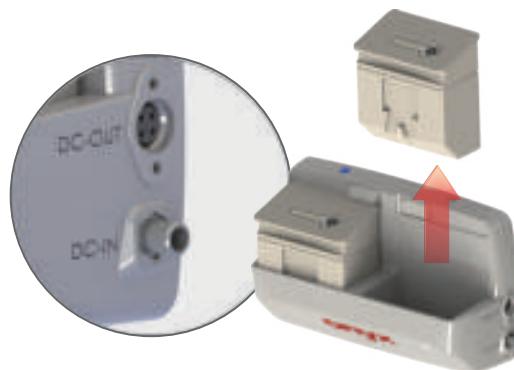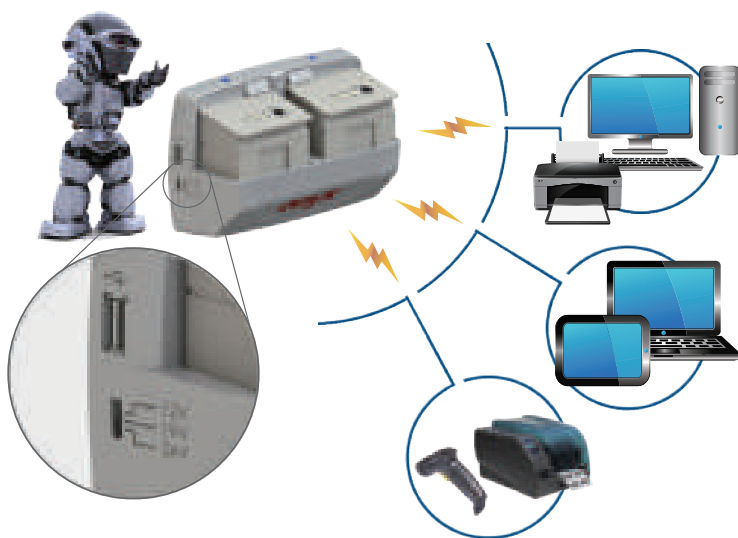

User Selected Voltage

Since electronic devices operate with varying voltage requirements, we created a multi-voltage power bank that allows users to personally select the proper voltage setting. Users can select from 12, 19, or 24 volts based on their needs.

ORION Management

These “smart” power banks can be managed with our new ORION device management software solution that intelligently monitors the status of all the batteries connected to the system.



Vital Sign Application

Hospital intensive care units (ICU) specialize in providing intensive care for patients suffering from severe injuries and life-threatening illness. Patients in intensive care units must be monitored constantly not only by highly trained hospital staff, but also with specialized medical equipment to make sure they remain in stable condition while recovering from serious medical emergencies, or surgery.



With UPower, battery powered medical devices will never again be in danger of losing power when it is most critically needed—and that’s a thought that doctors, patients, and all ICU staff can find reassuring and comforting.



Ubiquitous Power Solution

UPower Pro-22

2-slot charger with 90W DC output

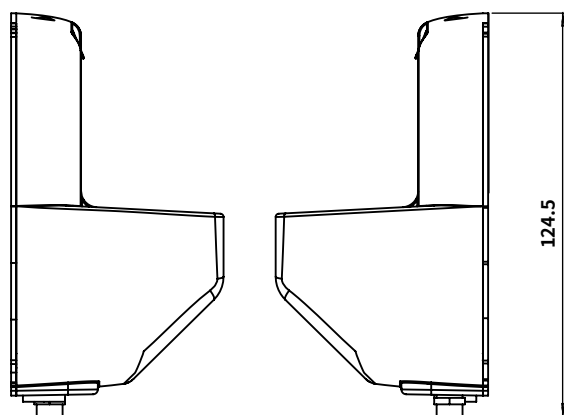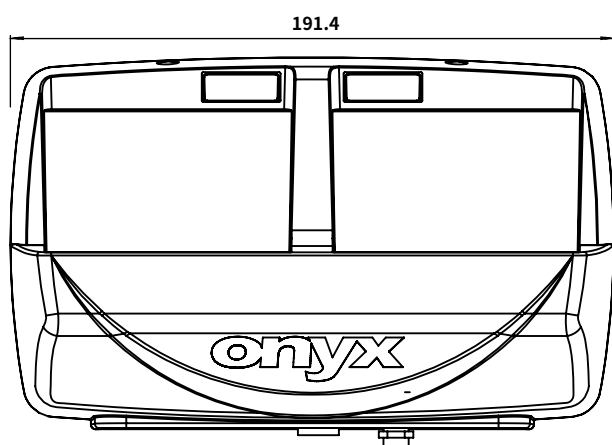

Features

- Compatible with short battery and long battery (XL)
- Max 90W power output, mini-din 4pin x1
- 10W USB port x1 (power output only)
- Selected voltage (12V / 19V / 24V)
- Non-stop, swappable batteries architecture
- Battery information monitor remotely (ORION)
- Support wall/cart mount. Fitting all environment
- LED indicator, clearly reveal recharge/discharge status

Specifications

Main Specifications

Output Voltage	12/19/24V (can be selected only one voltage)
Output Capacity	90W mini-din 4pin x1; 10W USB Type A x1 (power output only) *check user manual for more detail info
Battery Charge Time	3hrs for standard battery; 3.5hrs for XL battery
Input Power	24V Medical adaptor
Protection	Supports protection from over-voltage (input), over-current (input and output), short circuit, over-charge.
IO interface	Mini-din 4pin x1; USB Type A x1 (Power output only); USB micro-B x1(Data transport only); DC-in
Certification	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

Mechanical and Environmental

Architecture	ABS + PC
Color	White
Dimension	191(L) x 64(W) x 117(H) mm
Net Weight	0.67kg (1.47 lbs)
Packing Size	390(L) x 290(W) x 110(H) mm
Gross Weight	2kg (4.41 lbs)
Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@35°C, non-condensing

Battery LED Indicator

Blue Lighting	Full Charge (AC mode)
Blue Flashing	Charging (AC mode)
Green Lighting	Capacity 16%~100% (Battery mode)
Orange Lighting	Capacity 8%~15% (Battery mode)
Purple Lighting	Capacity 0%~7% (Battery mode)
Green-Purple Flashing	Charging error

Power Supply Specification

Input Voltage	100-240V AC @50-60 Hz
Output Power	24V / 6.25A

Battery Pack (optional)

Battery Type	6 / 9 / 12 Cell Lithium-ion battery
Battery Capacity	5700 / 8550 / 12060 mAh
Output Voltage	10.8 / 10.95 / 10.8 V

Ordering Information

» UP-P22-A3-1010
2-slot Charger with DC output + 24V adaptor

Ubiquitous Power Solution

UPower Lite-62

6-slot charger



Features

- Battery information monitor remotely (ORION)
- Capable of charging 6 batteries simultaneously
- 6 Independent LED indicators, clearly reveal recharge status
- High-speed recharge and over charge protection

Specifications

Main Specifications

Battery Charge Time	2.5 hrs for 85%, 3.5 hrs for 100% @std battery
Input Power	24V/250W adapter
Protection	Supports protection from over-voltage (input), over-current (input and output), short circuit, over-charge.
IO Interface	USB TypeA x 1(Data transport only), DC-in x 1
Certification	CE, FCC

Mechanical and Environmental

Architecture	ABS + PC
Color	White
Dimension	304(L) x 154(W) x 41(H) mm
Net Weight	1.16kg (2.56 lbs)
Packing Size	470(L) x 380(W) x 100(H) mm
Gross Weight	3kg (6.61 lbs)
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@35°C, non-condensing

Battery LED Indicator

Blue Lighting	Full Charge (AC mode)
Blue Flashing	Charging (AC mode)
Green Lighting	N/A
Orange Lighting	N/A
Purple Lighting	N/A
Green-Purple Flashing	N/A

Power Supply Specification

Input Voltage	100-240V AC @50-60 Hz
Output Power	24V / 10.41A, 250W max

Battery Pack (optional)

Battery Type	6/9/12 Cell Lithium-ion battery
Battery Capacity	5700 / 8550 / 12060 mAh
Output Voltage	10.8 / 10.95 / 10.8V

Ordering Information

» UP-L62-A1-1010

6-slot Charger + 24V/250W adaptor. USB.

Ubiquitous Power Solution

OPM-P01T / OPM-P02T

2 Battery kit. Lithium-ion 3S2P battery pack. 10.8V

2 XL Battery Kit. Li-ion. 10.95V. 8550mAh

OPM-P01T

2 Battery kit. Lithium-ion 3S2P battery pack. 10.8V



Features

- Support battery management system, remote monitor and auto alarm
- LED indicator, easily to check battery status
- Light weight, only 320g!!

Specifications

Battery Type	3S2P / 6 Cell Lithium-ion battery
Battery Voltage	10.8V
Battery Capacity	5700 mAh
Warranty	1 year
Certification	UL,CE,IEC-60950-1,IEC-62133-1

Mechanical and Environmental

Color	White
Dimension	84(L)x79(w)x48(H) mm
Net Packing Size	230(L)x150(w)x90(H) mm
Weight	320g/pcs
Gross Weight	0.9kg(1.98 lbs)
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@35°C, non-condensing


Ordering Information

» OPM-P01T-03

2 Battery Kit. Li-ion 3S2P, 10.8V, 5700mAh. Volume Order (via Ocean)

OPM-P02T

2 XL Battery Li-ion 10.95V 8550mAh



Features

- Compatible with all Venus-series and all UPower-series
- X1.5 battery capacity increase
- Supports remote management software (ORION)
- Battery capacity indicator button
- Medical grade certified (with Venus)
- Lightweight design

Specifications

Main Specifications

Battery Type	3S3P / 9 Cell Li-ion battery
Battery Voltage	10.95V
Battery Capacity	8550mAh
Warranty	1 year
Charging time	3hrs for 90% ; 3.5hrs for 100% (with UPower Pro-series)
Safety	Supports protection from over-voltage (input and output), over-current (input and output), short circuit, over-charge, over-discharge, and battery Positive Temperature Coefficient(PTC)
Compatible	Venus all series, UPower all series
Certification	UL, CE, IEC-60950-1, IEC-62133-1

Mechanical and Environmental

Architecture	ABS + PC
Color	White
Dimension	122(L) x79(W) x 50 (H) mm
Net Weight	0.5kg (1.10 lbs)
Packing Size	220(L) x 180(W) x 80(H) mm
Gross Weight	1.3kg (2.87 lbs)

Ordering Information

» OPM-P02T-03

2 XL Battery Kit. Li-ion 3S3P, 10.95V, 8550mAh. Volume Order (via Ocean)

Ubiquitous Power Solution

OPM-P03T

2 XXL Battery Kit. Li-ion. 10.8V. 12060mAh



Features

- 2 Years 1000 cycle warranty
- 130Wh battery capacity
- Black Box : internal information record
- Smart LED: battery status indicator for end user
- Compatible with all Venus and UPower series

Specifications

Main Specifications

Battery Type	3S4P / 12 Cell Li-ion battery
Battery Voltage	10.8V
Battery Capacity	12060mAh
Warranty	2 year , 1000 cycle
Charging time	4.5hrs with UPower Pro-series
Safety	Supports protection from over-voltage (input and output), over-current (input and output), short circuit, over-charge, over-discharge, and battery Positive Temperature Coefficient(PTC)
Compatible	Venus all series, UPower all series
Certification	UL, CE, IEC-60950-1, IEC-62133-1

Mechanical and Environmental

Color	White
Dimension	137(L) x 79(W) x 48 (H) mm
Net Weight	0.7kg (1.54lbs)/pcs
Packing Size	234(L) x 180(W) x 76(H) mm
Gross Weight	1.7kg (3.75 lbs)
Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@35°C, non-condensing

Ordering Infomation

Please access to our Webshop for more detail

<http://webshop-onyxhealthcare.com>

ORION-Hospital IT Management Software Package

ORION is a complete software solution that controls every part of your Onyx device infrastructure from the server, to the software manager and client devices. This system works the same way as the email servers we use every day to communicate. Each ORION system has a single server that connects to nursing carts (clients) that push their information to the server (similar to sending an email). The software manager collects information on the server received from the nursing carts to perform further analysis like battery cycle count or capacity attenuation.



Key Features

- »» Everything Remotely
- »» Break Up the Whole Into Parts
- »» To Improve the Quality



+ Remote Backup / Recovery

IT Managers can remotely perform critical operating system backup / recovery operations without having to be at any device's physical location.



+ Remote Update / Installation

System software / firmware installation and updates can also be performed remotely saving valuable time and resources.



+ E-mail Reporting

ORION includes an integrated e-mail client for regularly scheduled event reporting.



+ Battery Diagnostics

With potentially thousands of batteries in use in a single hospital, ORION can monitor them all with diagnostic tools that alert users of any battery-related errors.



ORION

ORION is a complete software solution that controls every part of your Onyx device infrastructure from the server, to the software manager and client devices. This system works the same way as the email servers we use every day to communicate. Each ORION system has a single server that connects to nursing carts (clients) that push their information to the server (similar to sending an email). The software manager collects information on the server received from the nursing carts to perform further analysis like battery cycle count or capacity attenuation.



+ Real-time Remote Monitoring

Real-time remote monitoring provides quick data feedback to help IT managers diagnose and fix system problems.



+ User-friendly Interface

ORION's user-friendly graphical interface conveniently organizes important data in a way that lets you quickly and easily review systemwide performance.



+ Customizable Dashboard

All IT managers have their own preferences for how to perform their duties. ORION's customizable dashboard gives IT managers the freedom to set operational parameters to their own liking to maximize efficiency.



+ Automated Task Scheduling

With automated task scheduling, ORION takes care of less important repetitive tasks so you can focus on more important priorities.




+ Group Settings

Device settings can be managed and saved by groups so that each department in a facility can have custom-managed devices.



Successful Story – NHS in UK

The Trust went live with their EPR called e-Care on 30th April 2016. Parity Medical were the chosen supplier of mobile computer carts. The Parity Infinity carts were selected after trialling as they are light weight, height adjustable, ergonomic, easy to clean and are powered 24/7 by hot swappable batteries. It was a big project that went live without any hiccups. Phase 2 has now been enabled and will be phased in throughout the year.

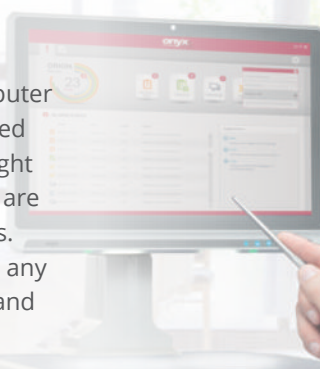



ORION Remote

Hospital IT Management Software Package

Main Specifications

Component	ORION Server + ORION Manager + ORION Clients
Description	To get the permission to manage ORION Client remotely

CORE FUNCTION

Battery Diagnostics	✓
Friendly UI	✓
Remote Backup/Recovery	✓
Remote Update/Installation	✓
E-Mail Reporting	✓
Automated Task Scheduling	✓
Group Settings	✓
Real-time Remote Monitoring	✓
Customizable Dashboard	✓

Ordering Information

ORION-A01-V2	ORION Air permission (per client)
--------------	-----------------------------------

Hardware Requirement

► ORION Server

CPU	1.6GHz or faster
RAM	1GB
Storage	20MB per client for one month record 10G for 500 clients for one month record
OS	Windows 7, Windows 8.1, Windows 10

► ORION Manager

CPU	1.6GHz or faster
RAM	1GB
Display	DirectX 9-capable video card running at 1024 x 768 or higher display resolution
OS	Windows 7, Windows 8.1, Windows 10
Other	Net Framework 4.0 above

Mobile Medical Assistant

Onyx Mobile Medical Assistant tablets are especially designed to streamline data exchange for EMS and hospitals. With rugged features, high brightness LCD and high performance CPU, these tablets can be operated in harsh environments while delivering superb performance and a crystal clear image. Onyx Mobile Medical Assistant tablets help eliminate medical paperwork by automating EMS and hospital workflows allowing paramedics and nurses to instantly access and document patient records.



Key Features

- » Effortless data collection and documentation with significant error reduction
- » Seamless integration of medical devices
- » Medical & ambulance dual certifications
- » Continuous power for 24/7 non-stop operation
- » Rugged design for outdoor and indoor use
- » Reduce hospital and ambulance service TOC

+ Light weight & compact size

The weight of MD101 is less than 1kg, and the compact size design let user can easy to carry the device to anywhere they want.



+ 10 points PCT touch Screen

Multi-touch has been implemented in several different ways. MD series provides 10 points touch functions to the user to do any control missions.



+ Windows OS support

MD series is supported by Windows OS which has good compatibility to the other medical device. The same windows user interface let user can easy to make use of the device.



+ Wi-Fi and Bluetooth V4.0 support

MD series has designed Wi-Fi 802.11b/g/n and 2.4GHz/ BT v4.0 inside. It help user easy to receive and deliver the medical data to other devices.



+ Long term product life time support

ONYX provides stable and long term support to our customers. Customers could focus on business promotion and product development.



Mobile Medical Assistant

MD116/MD116I

12" Rugged EMS Tablet



Features

- Intel® Apollo Lake processor / Sky Lake U processor / Kaby lake U processor
- Dual hot-swappable batteries for 24/7 operation
- Dual smart card readers for multiple-care workflow
- Standard USB Type-A and RJ45 for easy connection to medical devices
- IP54 certified & 3 feet drop resistant
- ORION client compatible
- Instant vehicle docking system
- Automotive Directive and EN1789 certified for ambulances/medical transportation vehicles

Specifications

Main Specifications	MD116	MD116I
Processor	Intel® Apollo Lake Processor	Intel® Kaby Lake U Processor
System Memory	DDR3L SO-DIMM x1, Default 4 GB (Up to 8 GB),	DDR4 SO-DIMM x1, Default 4 GB (Up to 8 GB)
OS Support	Microsoft® Windows 10 IOT LTSC	
Storage	M.2 Interface x1, Default 64 GB	
Wireless Communication	802.11 a/b/g/n + BT4.0 (Optional)	
Camera	2 MP (Front) / 5 MP (Rear)	
Touchscreen	Projected Capacitive Touchscreen, w/Gorilla Glass	
Digital Accelerometer	ADI ADXL345	
Ambient Light Sensor	TAOS TSL2581	
LTE+GPS	Sierra EM7455x 2 (Optional)	Sierra EM7455 x 1(Optional)
Function Keys	x2	
LED Indicators	x2	
Speaker	2W x1	
Internal Mic	x1	
Power Requirement	DC 12V	
Security	Smart Card Reader x2 , RFID x1	

Display

Display Size	11.6" 16:9 Widescreen LED Panel	
Resolution	FHD 1920 x 1080	
Max. Colors	16.7M	
Contrast Ratio	800:1	
Luminance (cd/m2)	300nits	600nits

I/O

USB	USB 3.0 (Type-A) x1, USB 2.0 (Type-A) x1	
Ethernet	Gigabit LAN x1	
DC-In	DC-in Jack x1	
Docking	Docking Connector x1	


Battery Pack

Battery Type	Li-ion	
Battery Capacity	4545 mAh (32.72Wh) x2	
Battery Run Time	Approx. 8 hrs	Approx. 3.5 hrs

Mechanical and Environmental

VESA	VESA 75 via docking station	
Operating Temperature	0° C ~ 40° C (32° F ~104° F)	0° C ~ 35° C (32° F ~95° F)
Storage Temperature	-20° C ~ 60° C (-4° F ~ 140° F)	
Storage Humidity	10%~95%@40°C, non-condensing	
Dimensions	312 (W) x 239 (H) x 37 (D) mm	
Packing Size	400 x 345 x160 mm	
Gross Weight	3 kg (6.6 lb)	
Net Weight	Approx. 1.45~1.8 kg (3.2 lb~3.97 lb)	
Certifications	CE: EN 60601-1-2:2015(V4.0),	
	EN 60601-1:2006/A1:2013(V3.1)	
	EN 300 328 (V2.1.1), EN 301 893 (V2.1.1)	
	FCC: Part 18 Class B, Part 15 C/E	
	UL: ANSI/AAMI ES60601-1:2012 (V3.1)	
	cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)	

Dimensions / Unit: mm

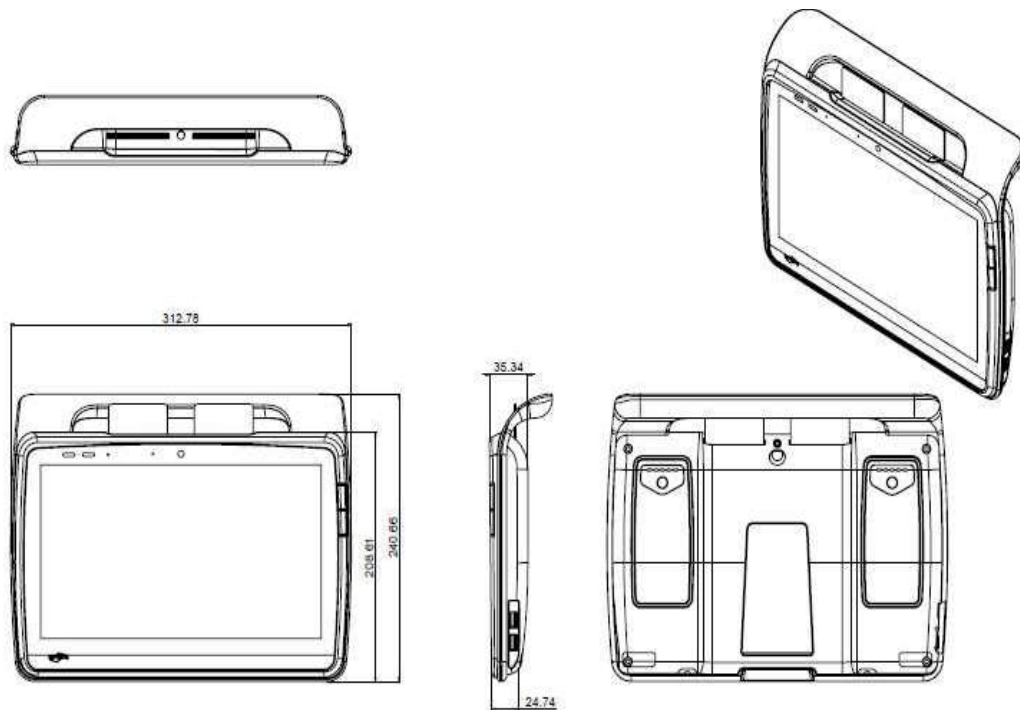

Ordering Information

- » ONYX-MD116ST-A1-1010
Tablet.N4200.11.6".FHD.300nits.PSU.C-TS(G).4G RAM.M.2 64GB.F/R-Camera.SCR.RFID.WiFi/BT.Battery
- » ONYX-MD116ST-A1-1011
Tablet.N4200.11.6".FHD.600nits.PSU.C-TS(G).4G RAM.M.2 64GB.F/R-Camera.SCR.RFID.WiFi/BT.Battery
- » ONYX-MD116I-P62-A1-0001
Tablet.i5-6200U.11.6".FHD.300nits.PSU.C-TS(G).F/R-Camera.SCR.RFID.WiFi/BT.Battery(x2)
- » ONYX-MD116I-P62-A1-0002
Tablet.i5-6200U.11.6".FHD.600nits.PSU.C-TS(G).F/R-Camera.SCR.RFID.WiFi/BT.Battery(x2)
- » ONYX-MD116I-P73-A1-0001
Tablet.i5-7300U.11.6".FHD.300nits.PSU.C-TS(G).F/R-Camera.SCR.RFID.WiFi/BT.Battery(x2)
- » ONYX-MD116I-P73-A1-0002
Tablet.i5-7300U.11.6".FHD.600nits.PSU.C-TS(G).F/R-Camera.SCR.RFID.WiFi/BT.Battery(x2)

Mobile Medical Assistant

MD101

10.1" Rugged Medical Tablet



Features

- Intel® Cherry Trail processor
- Slim & lightweight design for clinical mobility
- Long battery life for intensive care services
- Standard USB Type-A for easy connection to medical devices
- IP54 certified & 3 feet drop resistant
- ORION client compatible
- VESA mounting via adapter
- EN60601-1 & UL60601-1 Certified
- Ergonomic design adapted for portable and cart use
- Windows 10 and Android 6.0 available

Specifications

Main Specifications

Processor	Intel® Cherry Trail QC Processor Z8350 1.44 GHz	
System Memory	2 / 4 GB	
OS Support	Microsoft® Windows 10 IOT LTSB	Android 6.0
Storage	eMMC 64 /128 GB	
Wireless Communication	802.11 a/b/g/n+BT 4.0	
Gyroscope Sensor	Bosch BMG 160	
Camera	2 MP (Front) / 8 MP (Rear)	
Touchscreen	Projected Capacitive Touchscreen , w/Gorilla Glass	
Accelerometer Sensor	Bosch BMC150	
Ambient Light Sensor	Capella CM3218	
Power Button	x1	
Volume Keys	x2	
Speakers	3 W x2	
Internal Mic	x1	
Alarm Light	x1 (Optional)	
Power Requirement	DC 15 V	

Display

Display Size	10.1" 16:10 Wide Screen LED Panel
Resolution	FHD 1920 x 1200
Max. Colors	16.7 M
Contrast Ratio	800:1
Luminance (cd/m2)	300 nits

I/O

USB	USB 3.0 (Type-A) x1	N/A
Audio Out / Mic In	3.5 mm Combo Audio Jack x1	
Video Out	Micro HDMI x1 (Optional)	
DC-In	x1	


Battery Pack

Battery Type	Li-ion
Battery Capacity	4090 mAh (46.62 Wh)
Battery Run Time	Approx. 8 hrs

Mechanical and Environmental

VESA	VESA 75 via cradle
Operating Temperature	0° C ~ 40° C (32° F ~ 104° F)
Storage Temperature	-20° C ~ 60° C (-4° F ~ 140° F)
Storage Humidity	10%~95%@40°C, non-condensing
Dimension	260 (W) x 186 (H) x 23 (D) mm
Packing Size	310 x 220 x 110 mm
Gross Weight	2 kg (4.4 lb)
Net Weight	Approx. 1 kg (2.2 lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) EN 300 328(V2.1.1), EN 301 893 (V2.1.1) FCC: Part 18 Class B, Part 15 C/E UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

Dimensions / Unit: mm

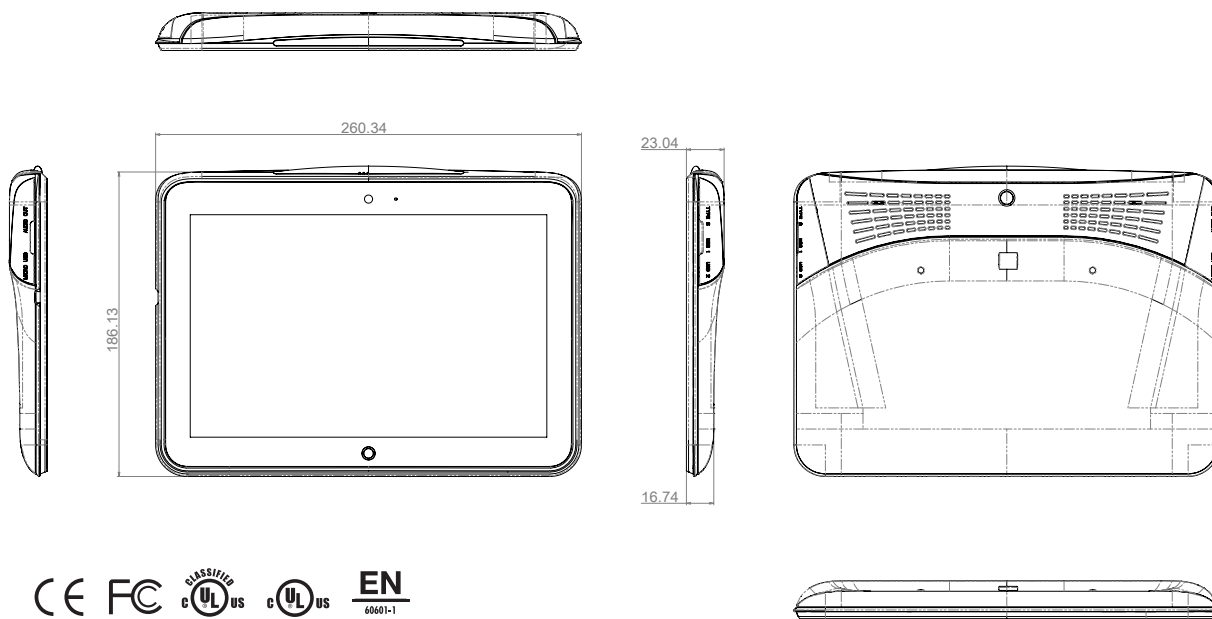

Ordering Information

» ONYX-MD101ST-A1-1010

10.1" FHD 300nits, Gorilla PCT, Cherry Trail Z8350, 4G RAM, 128G eMMC, Dual Camera, WiFi/BT, Battery, Adapter; but without OS.

» ONYX-MD101ST-A1-1011

10.1" FHD 300nits, Gorilla PCT, Cherry Trail Z8350, 4G RAM, 128G eMMC, Dual Camera, WiFi/BT, Battery, Adapter, Android ,but without:Audio Jack.



VESA Cradle



» Cradle for MD101
PN:OPM-T019-A1

MPAD-800

8" Medical Tablet

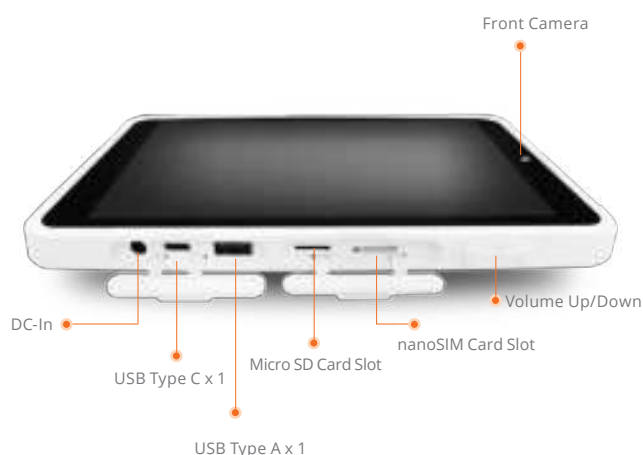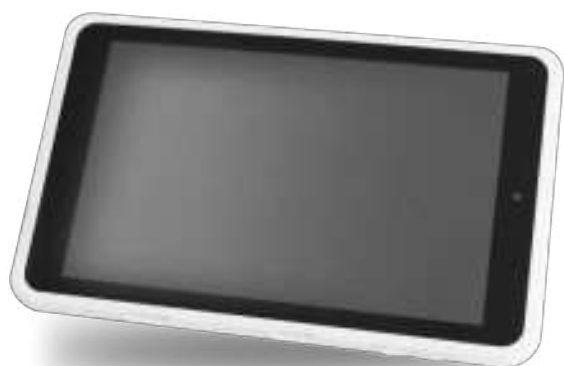

Features

- ARM® Cortex® Quad-Core up to 1.6 GHz
- Android 6.0.1
- Water/Drop Proof & Fanless Operation
- Built-in Type A USB Port
- Built-in Cellular Communication
- Shift Ready Battery Life
- Medical Grade Device Safety

Specifications

Main Specifications

Processor	ARM® Cortex® Quad-Core up to 1.6 GHz
System Memory	2GB SDRAM
OS Support	Android 6.0.1
LCD Touch Display	8" (1280 x 800) TFT LCD with 2-point P-cap (Latex Glove Operable)
Communication	WiFi a/b/g/n/ac + Bluetooth 4.0 /
I/O Port	USB Type C x 1 or Micro USB x1, USB Type A x 1, Volume Up/Down , 3.5mm Stereo Headphone Jack x1, DC-In Jack x 1 or USB Type C Charging x1 or Pogo pin Charging , Built-In Speaker & Microphone, nanoSIM Card Slot, Micro SD Card Slot
Storage	16 GB eMMC Flash
Camera	Front 2MP , Rear 8MP with Flash LED
Sensor	Built-in Light Sensor, Built-in G-Sensor , Built-in Vibration Motor


Mechanical and Environmental

Color	White
Dimension(W x H x D)	136.6 x 219 x 21 mm
Packing Size	280 x 250 x 80 mm
Gross Weight	1.8kg (3.96 lb)
Net Weight	0.67 Kg (1.48lb)
Operating Temperature	0°C ~ 40°C
Storage Temperature	-20°C ~ 60°C
Operating Humidity	10 ~ 75%
Water / Drop Proof	IP54 / 76cm
Medical Certification	CE/FCC Class B , UL60950 , UL/EN60601-1

Power Supply

AC/DC Adapter	AC Power Input: 100 ~ 240V , 50~60Hz, 36W , Output: 12V , 3A
Battery	Lithium-Polymer High Capacity Battery (8 Hours)

Dimensions / Unit: mm

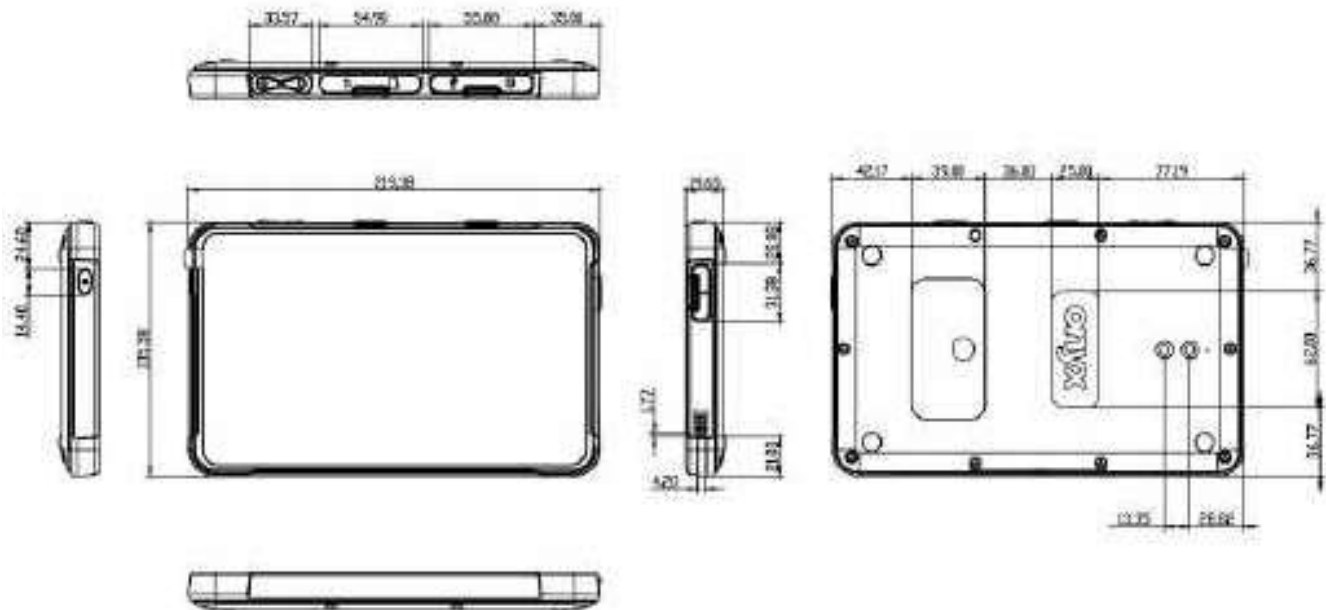

Ordering Information

» MPAD-800-A1-1010

Tablet . RK3288. 2G-16G. WiFi.BT.Android 6.0

Mobile Medical Assistant

Julia- J07

7" PDA (mPDA)



Features

- Cortex-A53 Octa Core Processor
- 7" 1280 x 720 TFT Panel with direct optical bonding
- Support Android 5.1 OS
- Hot-swappable battery design
- Support 1D/2D Barcode and NFC Reader
- IP65 waterproof and dustproof
- Easy to store in the coats pockets

Specifications

System Specification

Processor	ARM® Cortex™-A53 Octa-core 1.3 GHz
System Memory	2GB RAM
Storage	16GB eMMC Additional storage available: SD (up to 2 GB), SDHC (up to 32 GB)
Operating system	Android 5.1
Microphone	2 x Built-in Mic
Speaker	1 x 1.2 W speaker
Earphone	1 x Earphone
Web camera	2MP Camera
Rear camera	8MP Camera with LED auxilliary light (auto focus)
NFC	NFC (Read / Write, Peer to Peer mode)
Barcode	1D/2D Barcode Reader

Display Specification

Size	7-inch
Resolution	1280 x 720
Brightness	650 nit with direct optical bonding for sunlight readable
Touch	Multi-touch projected capacitive
Contrast Ratio	800:1
Viewing angle	80/80/80/80
Technology	Ambient light sensor, g-sensor , Automatic screen rotation

Wireless Communication

WLAN	802.11 a/b/g/n
Bluetooth	Bluetooth 4.0
GPS	GPS / AGPS / GLONASS
WWAN	Optional 3G/4G LTE

Interface

Docking Connector	1 x Docking connector
USB	1 x Micro USB OTG
Power input	1 x Power Jack
Micro SD	1 x Micro SD Card Slot
SIM Card Slot	2 x SIM Card Slot

Input

Button	1 x Volume +/- , 1 x Power Button, 1 x Home Button, 1 x Menu Button, 1 x Return Button, 1 x Trigger Button
LED Indicators	2 x LED indicators (Power, Battery)

Mechanical and Environment

Dimension (W x L x H)	212.4 x 132.8 x 19 mm (8.36 x 5.23 x 0.75 inches)
Packing Size	280 x 240 x 60 mm
Gross Weight	1.5kg (3.3 lb)
Net Weight	550g (1.21 lb)
Operating Temperature	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)

Power Management

Power Input	5V DC
Battery	3.7V 5300mAh Li-Poly optional for Hotswappable function
Battery Operating Time	20Hr
Adapter	100-240V/ 5V 3A Adapter

Accessories

Standard Accessories	Universal Adapter
Optional Accessories	Battery Charging Dock, Vehicle Dock (Charging + Connectors) , Vehicle Dock (Charging Only), Desk Dock , Hand Strap , Carry Bag, Capacitive Touch Stylus, Vehicle Adapter

Order Information

- » Julia-J07-P01-A1-0201
7" mPDA.Cortex-A53.PCT.2GB RAM.16GB eMMC.BCR.
Android 5.1
- » Julia-J07-P01-A1-0202
7" mPDA.Cortex-A53.PCT.2GB RAM.16GB eMMC.Android 5.1

Mobile Medical Assistant

Julia- J05

5" PDA (mPDA)



Features

- Cortex A53- Octa Core 1.3GHz
- 5" 1280 x720 Panel with direct optical bonding
- Support Android 5.1 OS
- 1D/2D Barcode Reader and NFC reader for data collection
- IP65 waterproof and dustproof
- Easy to store in the coats pockets

Specifications

Main Specifications

Processor	ARM® Cortex™-A53 Octa-core 1.3 GHz
System Memory	2GB RAM
Storage	16GB eMMC Additional storage available: SD (up to 2 GB), SDHC (up to 32 GB)
Operating system	Android 5.1
Microphone	2 x Built-in Mic
Speaker	1 x 1.2 W speaker
Earphone	1 x Earphone
Web camera	2MP Camera
Rear camera	8MP Camera with LED auxiliary light (auto focus)
NFC	NFC (Read / Write, peer to peer Mode)
Barcode	1D/2D Barcode Reader

Display Specification

Size	5-inch
Resolution	1280 x 720
Brightness	500 nit with Direct optical bonding for sunlight readable
Touch	Multi-touch projected capacitive
Contrast Ratio	800:1
Viewing angle	80/80/80/80
Technology	Ambient light sensor, e-compass, gyro, and acceleration sensors, Automatic screen rotation

Wireless Communication

WLAN	802.11 a/b/g/n
Bluetooth	Bluetooth 4.1
GPS	GPS / AGPS / GLONASS
WWAN	Optional 3G/4G LTE

Interface

Docking Connector	1 x Docking connector
USB	1 x Micro USB
Power input	1 x Power Jack
Micro SD	1 x Micro SD Card Slot
SIM Card Slot	2 x SIM Card Slot

Input

Button	1 x Volume +/-, 1 x Power Button, 2 x Function Button
LED Indicators	1 x LED indicators

Mechanical and Environment

Dimension (W x L x H)	85.9 x 163.2 x 22.5 mm
Packing Size	240 x 140 x 100 mm
Gross Weight	1.2 kg (2.64 lb)
Net Weight	315g (0.69 lb)
Operating Temperature	-10°C to 50°C (Battery mode)

Power Management

Battery	3.7V 3900mAh Li-ion removable battery, optional for Hotswappable function
Battery Operating Time	20Hr
Adapter	5V 2A Adapter

Accessories

Standard Accessories	Universal Adapter ,Micro USB Cable ,Micro SD Card, Hand Strap
Optional Accessories	Charging Dock 2 bay ,Charging Dock 6 bay ,Battery Charging Dock 2 bay ,Battery Charging Dock 6 bay

Order Information

» Julia-J05-P01-A1-0201

5" mPDA.Cortex-A53.PCT.2GB RAM.16GB eMMC.BCR.Android 5.1

» Julia-J05-P01-A1-0202

5" mPDA.Cortex-A53.PCT.2GB RAM.16GB eMMC.Android 5.1

MD116 Accessory Selection

Vehicle Dock OPM-T016-A2



Specifications

Description	Vehicle Dock
Input Power	12V
Installations	VESA 75
IO	2x USB 2.0 Type-A 1x RJ45 1x Line Out 1x Phoenix Port 1x DC In Jack
LED Indicator	N/A
Dimensions	236.89 x 293.03 x 88.22mm
Weight	800g
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)

Optional Accessories

- » OPM-T016-A2
MD116 Vehicle Docking with Holder

VESA Cradle OPM-T021-A1



Specifications

Description	VESA Cradle
Input Power	N/A
Installations	VESA 75
IO	N/A
LED Indicator	N/A
Dimensions	206.69 x 196.64 x 87.8mm
Weight	395g
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)

Optional Accessories

- » OPM-T021-A1
MD116 VESA Cradle

MD116 Accessory Selection

Office Dock OPM-T022-A1



Specifications

Part Number	OPM-T022-A1
Description	Office Dock
Input Power	12V
Installations	Stationary
IO	2x USB 2.0 Type-A 1x RJ45 1x RS-232 1x DC-In
LED Indicator	Steady Green: Connection LED Off: Disconnection
Dimensions	354 x 117 x 78.2mm
Weight	1060g
Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)

Optional Accessories

- » OPM-T022-A1
MD116 Office Dock

Battery Charger UP-M62



Specifications

Description	Battery Charger
Input Power	24V
Installations	Stationary
IO	1x Micro USB (Client) 1x DC-In
LED Indicator	Flickering Blue: Battery Charging Steady Blue: Battery Fully Charged Flickering Purple Green: Error
Dimensions	245.95 x 124.64 x 143.65mm
Weight	860g
Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)

Optional Accessories

- » UP-M62-A1-1010
MD116 6-slots Charger

Surgical and Server Level Workstation Solution

Zeus is the symbol of strength and power, and so does our Medical Station Zeus. It was designed to fulfill surgical high spec requirements such as OR, ICU, ER and Reading Room. Zeus's isolated ports are extremely important as they will connect to devices that are directly connected to the patient. Onyx has spent two years developing the new Zeus Series, the Smart View Medical Station, and it gives doctors crystal clear imaging when viewing PAC, ENDO, or just EMR. Other than surgical suite, Zeus all in one high performance spec will also benefit in ambulatory care, telemedicine, and administration.



Smart View Design with Worldwide Patents

- » 24"/22"/19" Medical Grade MVA panel. Compared to a normal monitor or industrial LCD, Zeus has rich color content and high contrast ratio. extremely vivid.
- » Multi-touch PCT screen. It guarantees double OR gloves usage, 10 billion click life and up to 95% transparency rate. Zeus enhance the screen performance over 15%.
- » Flat and edgeless ID design give doctors the best-in-market user interaction experience. White color bezel makes cleaning very easy.
- » Patented smart multi function OSD keys covers up to 10 features for RFID, Reading light, display mode, speaker volume, LCD brightness, etc. Zeus can also offer customization.

✚ 1st Intel® Quad Core i7 Platform for Critical Applications

Zeus Series offer ultra high performance Intel® Core i7 LV Dual Core /Quad Core Smart View Medical Station.



✚ Super 3.0 for USB, SATA and PCI-e

Still looking for a faster solution to upload or download medical records?! Zeus comes with latest high speed I/O design (USB3.0, SATA3.0, PCI-E3.0). Super 3.0 gives ten times data rate than before.



✚ DICOM Compliance Display

Zeus supports DICOM Part 14: Grayscale Standard Display Function to display accurate radiology PACS images such as ultrasound, endoscope, CT and MRI images. Users can switch the system from HIS, EMR to PACS or Endo with ease.



✚ MIS with Remote Control Power

Onyx's cooperation with Intel allows Zeus to carry iAMT technology. The MIS manager can handle hundreds, even thousands of Zeus stations from the central room in real time. Hospital IT departments can save huge amounts of time and money on routine maintenance.



✚ Triple Isolation Protection to Patient

Medical isolation rating is 4kV rms (IEC 60601-1), which is crucial to protect patients, operators and medical equipment from harmful surges or spikes in the electrical signal. Zeus offers COM port, USB port and Ethernet Port isolation. We set the highest standard for patient and medical uses.



✚ Backup Battery for Uninterruptible Power Supply

Optional built-in battery provides backup power supply for at least 10 minutes to prevent the system from unexpected power disruption.



✚ Full SDK for Enhanced Functions Development




ONYX offers "Access Manager", "Power Monitor", "Control Kit", "Security Watcher" to let system integrators to quickly and efficiently create enhanced and customized environment.



Surgical and Server Level Workstation

ZEUS-248

24" Fanless Smart View 7th Generation Core i7 Multi-Touch Medical Station

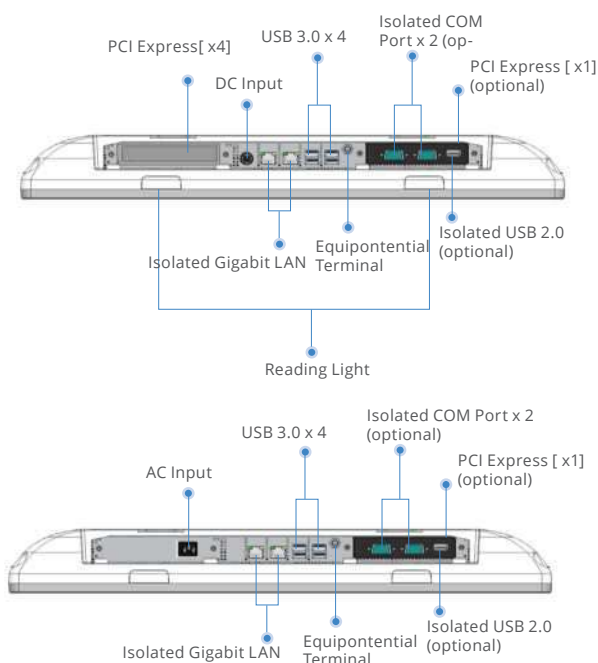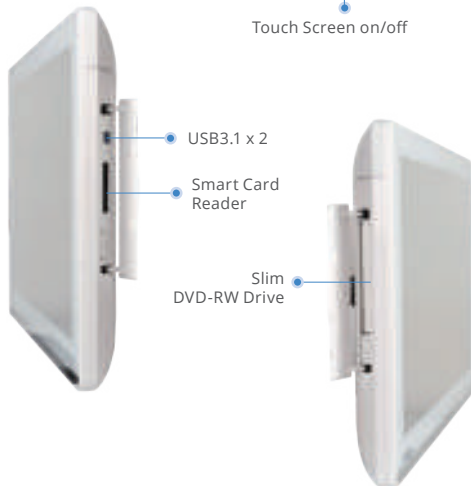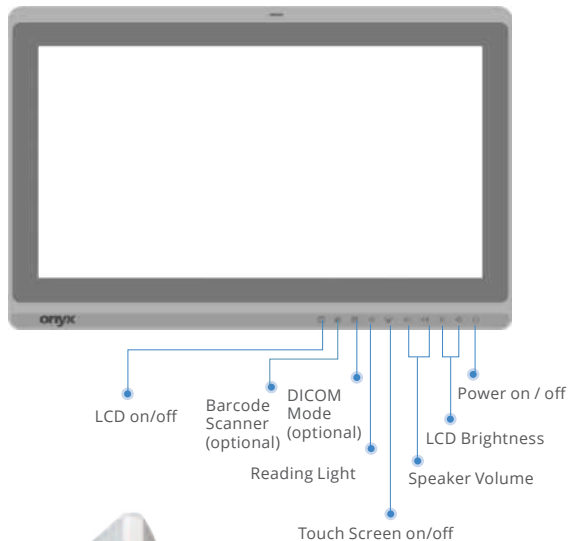

Features

- Intel® 7th Generation Core i7-7600U 3.9GHz Dual Core Processor
- 24" 250-nit Full HD High Contrast MVA LCD
- Supports DDR4 SODIMM up to 32GB
- Capacitive Multi-Touch Screen / 5 Wire Resistive Touch Screen
- Easy Cleaning Flat Screen
- 10 Programmable Smart Function Keys with Dual Colors LED Status Indication
- LAN/USB(optional)/COM(optional) Medical Isolation
- Super Speed 10Gb/s USB 3.1 Port
- PCI Express[x4] x 1, PCI Express[x1] , PCI x1(optional)
- Trusted Platform Module / Smart Card Reader(optional) / RFID Reader(optional)
- Remote Management: Intel Active Management Technology
- +12V to +24V wide range DC input
- 25Wh Backup Battery(optional)

Specifications

Main Specifications

Processor	Intel® 7th Generation Core i7-7600U 3.9GHz Dual Core
System Memory	DDR4 SODIMM up to 32GB
Expansion	PCI Express[x4] x 1, PCI Express[x1] , PCI x1(optional)
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1 Slim DVD-RW Drive x 1(optional) M.2 SSD x 1
Security	Trusted Platform Module, Smart Card reader(optional), RFID(optional)
Wireless Communication	802.11a/b/g/n/ac(optional), Bluetooth 4.0 (optional)
Speaker	5W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down, LCD On/Off, Touch Screen On/Off, DICOM Mode(optional), Reading Light On/Off
Power Requirement	DC 12~24V / AC 100~240V , 22Wh Back Up Battery(optional)
OS Support	Windows® 10, Linux®

Display

Size	24" LCD
Resolution	1920 x 1080
Luminance	250 nits
View Angle	178°(H)/178°(V)
Contrast Ratio	3000:1
Back Light Life Time	30,000 Hours
Touch Screen	Capacitive Multi-Touch/5-Wire Resistive

I/O


USB	USB 3.0 x 4, USB 3.1 x 2(in side I/O), Isolated USB 2.0 x1(optional)
Serial Port	Isolated RS-232 x 2(optional)
Ethernet	Isolated Gigabit LAN x 2
Audio	Mic(optional)/ Line out(optional)
Video Out	Display Port x 2(optional)

Mechanical and Environmental

Power Consumption	Full Loading: 60 Watts
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	IP65 in the front, IP54 in the back
Dimension	600 x 415 x 65 mm
Package Size	790 x 220 x 550 mm
Gross Weight	14 kg (30.86 lb)
Net Weight	9.2kg (20.28lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

24" Fanless Smart View 7th Generation Core i7 Multi-Touch Medical Station

Dimension / Unit: mm

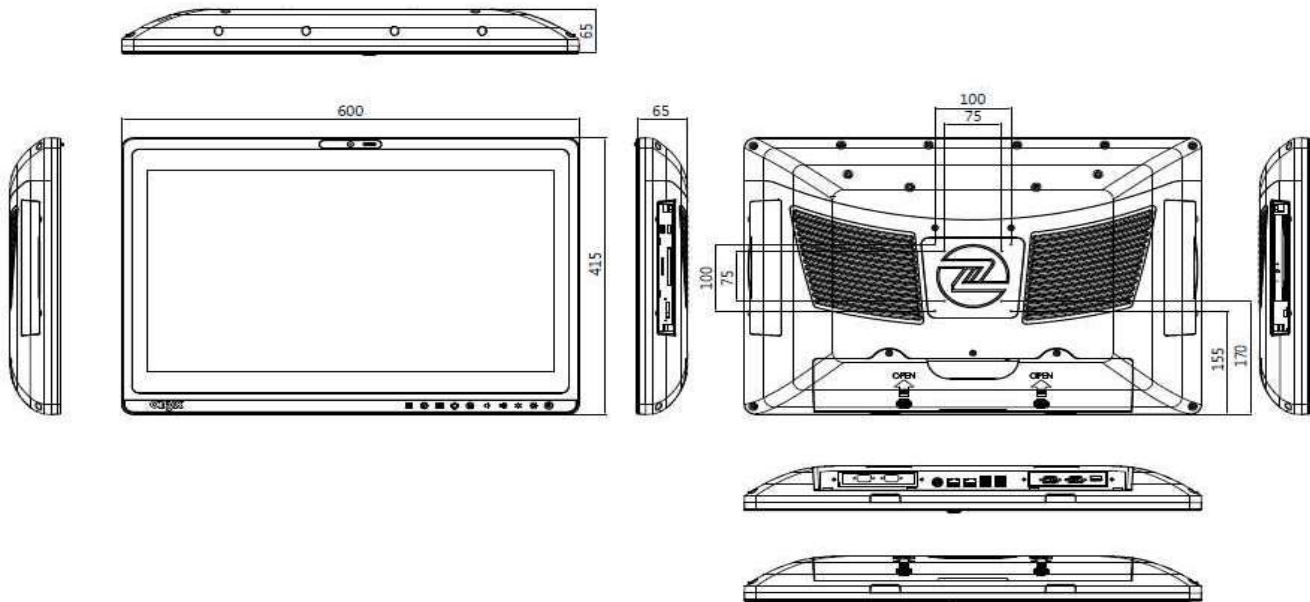

Ordering Information

- | | |
|---|---|
| » ZEUS-248ST-A5-1010
i7-7600U, 4GB RAM, 24" LCD, 12~24V DC, Capacitive Touch | » ZEUS-248ST-A5-1110
i7-7600U, 4GB RAM, 24" LCD, 100~240V AC, Capacitive Touch |
| » ZEUS-248ST-A6-1010
i5-7300U, 4GB RAM, 24" LCD, 12~24V DC, Capacitive Touch | » ZEUS-248ET-A5-1110
i7-7600U, 4GB RAM, 24" LCD, 100~240V AC, Resistive Touch |
| » ZEUS-248ET-A5-1010
i7-7600U, 4GB RAM, 24" LCD, 12~24V DC, Resistive Touch | » ZEUS-248ST-A6-1110
i5-7300U, 4GB RAM, 24" LCD, 100~240V AC, Capacitive Touch |
| » ZEUS-248ET-A6-1010
i5-7300U, 4GB RAM, 24" LCD, 12~24V DC, Resistive Touch | » ZEUS-248ET-A6-1110
i5-7300U, 4GB RAM, 24" LCD, 100~240V AC, Resistive Touch |





Optional Accessories

- | | |
|---|--|
| » 1255301202
Medical Power Adapter, 120W, 24V | » OPM-V03B-A2
One Display Port Kit |
| » OPM-C16W-A6
Mini Card WLAN Kit, IEEE 802.11a/b/g/n + Bluetooth 4.0 | » OPM-T017-A5
Hot Swap Rack w/Lock Kit for 2.5" HDD/SSD |
| » OPM-T003-A5
Slim Slot-in DVD-RW Drive | » OPM-T012-A2
Two RS-232 Kit |
| » OPM-T006-A1
Smart Card Reader Kit | » OPM-V04B-A1
DICOM Kit |
| » OPM-P09C-A3
25Wh Backup Battery | » OPM-R02X-A1
PCI Express [X1] Riser Kit |
| » OPM-C02C-A4
Two Isolated RS-232 PCIe Card | » OPM-R01P-A1
PCI Riser Kit |
| » OPM-C02C-A3
One Isolated USB 2.0 + Two Isolated R-232 PCIe Card | » OPM-U01T-A1
Line-out/Line-in/Mic Kit |
| » OPM-V03B-A1
One Display Port + Two RS-232 Kit | » OPM-S07R-A4
RFID Reader Kit |

Surgical and Server Level Workstation

ZEUS-228

22" Fanless Smart View 7th Generation Core i7 Multi-Touch Medical Station

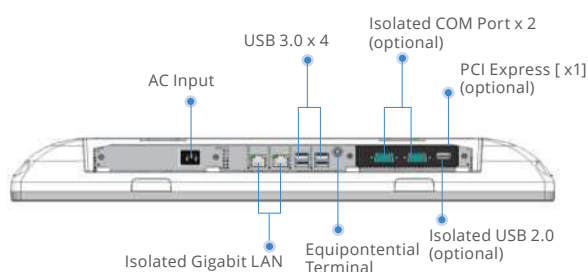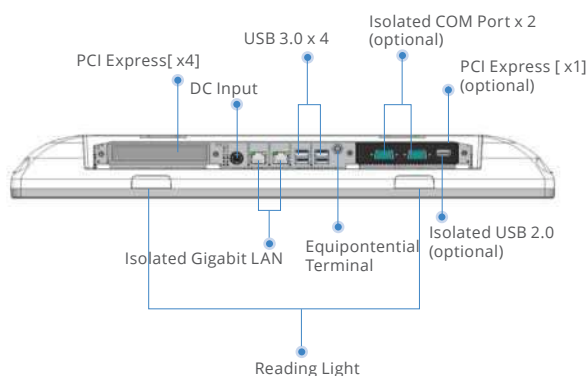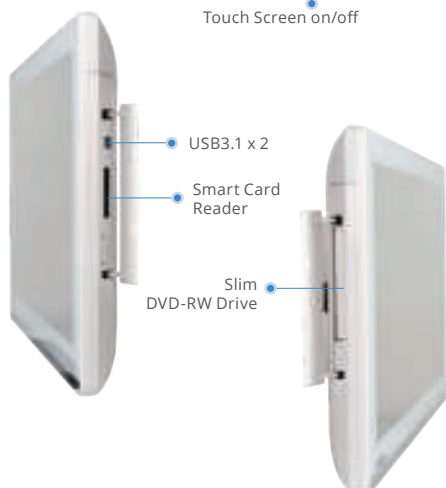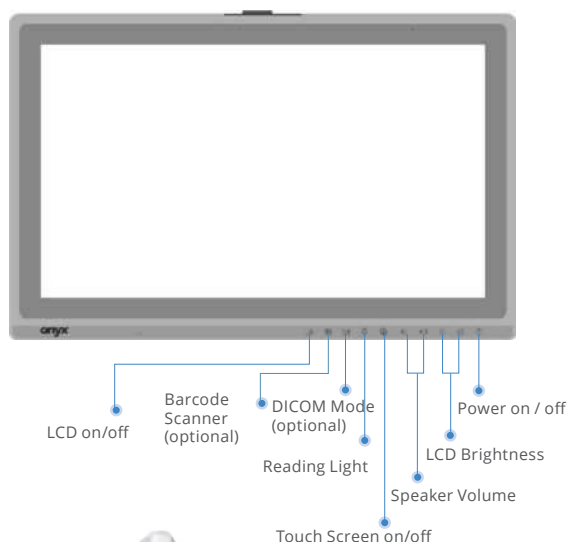

Features

- Intel® 7th Generation Core™ i7-7600U 3.9GHz Dual Core Processor
- 22" 250nits Full HD High Contrast MVA LCD
- Support DDR4 SODIMM up to 32GB
- Capacitive Multi-Touch Screen / 5 Wire Resistive Touch Screen
- Easy Cleaning Flat Screen
- 10 Programmable Smart Function Keys with Dual Colors LED Status Indication
- LAN /USB (optional)/COM(optional) Medical Isolation
- Super Speed 10Gb/s USB 3.1 Port
- PCI Express[x4] x 1, PCI Express[x1] , PCI x1(optional)
- Trusted Platform Module/Smart Card Reader(optional)/RFID Reader(optional)
- Remote Management : Inte Active management Technology
- +12V to +24V Wide Range DC Input / 100V to 240V AC input
- 25Wh Backup Battery (optional)

Specifications

Main Specifications

Processor	Intel® 7th Generation Core i7-7600U 3.9GHz Dual Core
System Memory	DDR4 SODIMM up to 32GB
Expansion	PCI Express[x4] x 1, PCI Express[x1] , PCI x1(optional)
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1 Slim DVD-RW Drive x 1(optional) M.2 SSD x 1
Security	Trusted Platform Module, Smart Card reader(optional), RFID reader(optional)
Wireless Communication	802.11a/b/g/n/ac(optional), Bluetooth 4.0 (optional)
Speaker	5W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down, LCD On/Off, Touch Screen On/Off, DICOM Mode(optional), Reading Light On/Off
Power Requirement	DC12~24V, /AC 100~240V, 22Wh Back up battery(optional)
OS Support	Windows® 10, Linux®

Display

Size	22" LCD
Resolution	1920 x 1080
Luminance	250 nits
View Angle	178°(H)/178°(V)
Contrast Ratio	3000:1
Back Light Life Time	30,000 Hours
Touch Screen	Capacitive Multi-Touch/5-Wire Resistive

I/O


USB	USB 3.0 x 4, USB 3.1 x 2(side I/O) Isolated USB 2.0(optional)
Serial Port	Isolated RS-232 x 2(optional)
Ethernet	Isolated Gigabit LAN x 2
Video Out	Display Port x 1 (optional)

Mechanical and Environmental

Power Consumption	Full Loading: 55 Watts
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	IP65 in the front, IP54 in the back
Dimension	546 x 352 x 66mm
Package size	750 x 220 x 490 mm
Gross Weight	12 kg (26.45 lb)
Net Weight	8kg (17.6lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

22" Fanless Smart View 7th Generation Core i7 Multi-Touch Medical Station

Dimension / Unit: mm

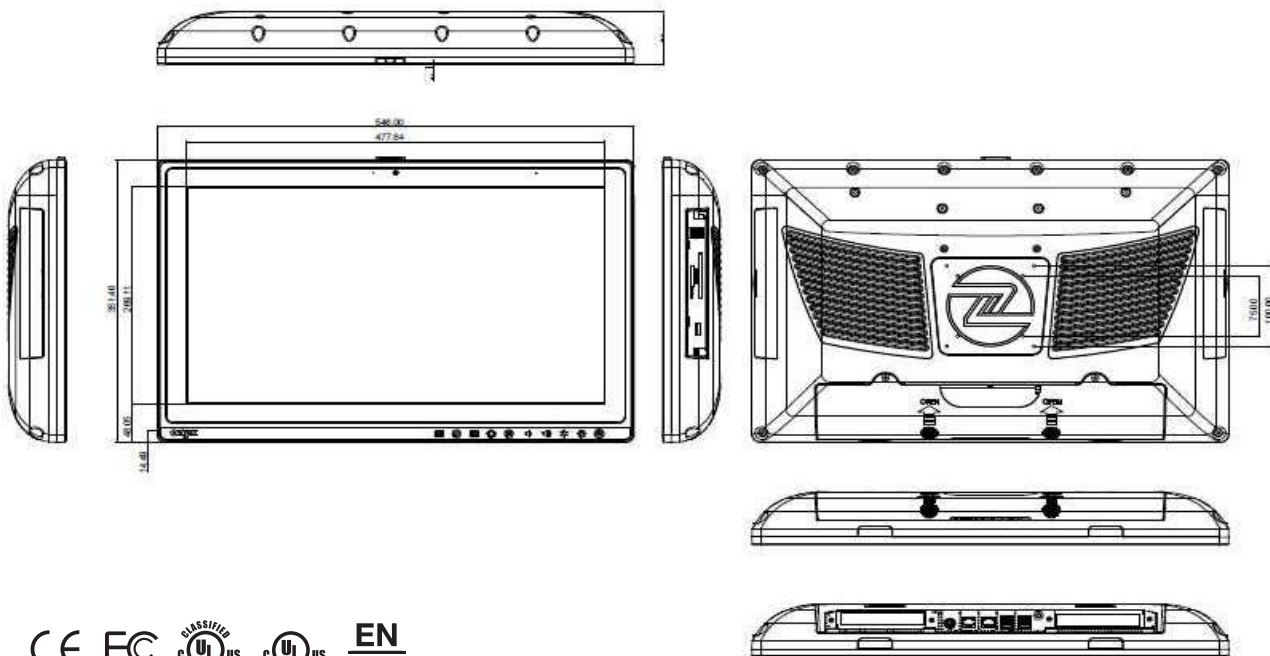

Ordering Information


- » ZEUS-228ST-A5-1010
i7-7600U, 4GB RAM, 22" LCD, 12~24V DC, Capacitive Touch
- » ZZEUS-228ST-A5-1110
i7-7600U, 4GB RAM, 22" LCD, 100~240V AC, Capacitive Touch
- » ZEUS-228ET-A5-1010
i7-7600U, 4GB RAM, 22" LCD, 12~24V DC, Resistive Touch
- » ZEUS-228ET-A5-1110
i7-7600U, 4GB RAM, 22" LCD, 100~240V AC, Resistive Touch
- » ZEUS-228ST-A6-1010
i5-7300U, 4GB RAM, 22" LCD, 12~24V DC, Capacitive Touch
- » ZEUS-228ST-A6-1110
i5-7300U, 4GB RAM, 22" LCD, 100~240V AC, Capacitive Touch
- » ZEUS-228ET-A6-1010
i5-7300U, 4GB RAM, 22" LCD, 12~24V DC, Resistive Touch
- » ZEUS-228ET-A6-1110
i5-7300U, 4GB RAM, 22" LCD, 100~240V AC, Resistive Touch

Optional Accessories

- » 1255301202
Medical Power Adapter, 120W, 24V
- » OPM-C16W-A6
Mini Card WLAN Kit, IEEE 802.11a/b/g/n + Bluetooth 4.0
- » OPM-T003-A4
Slim Slot-in DVD-RW Drive
- » OPM-T006-A1
Smart Card Reader Kit
- » OPM-P09C-A2
25Wh Backup Battery
- » OPM-C02C-A4
Two Isolated RS-232 PCIe Card
- » OPM-C02C-A3
One Isolated USB 2.0 + Two Isolated R-232 PCIe Card
- » OPM-V03B-A1
One Display Port + Two RS-232 Kit
- » OPM-V03B-A2
One Display Port Kit
- » OPM-T017-A1
Hot Swap Rack w/Lock Kit for 2.5" HDD/SSD
- » OPM-T012-A2
Two RS-232 Kit
- » OPM-V04B-A2
DICOM Kit
- » OPM-R02X-A1
PCI Express [X1] Riser Kit
- » OPM-R01P-A1
PCI Riser Kit
- » OPM-U01T-A1
Line-out/Line-in/Mic Kit
- » OPM-S05R-A2
RFID Reader Kit

ZEUS-198

19" Fanless Smart View 7th Generation Core i7 Multi-Touch Medical Station

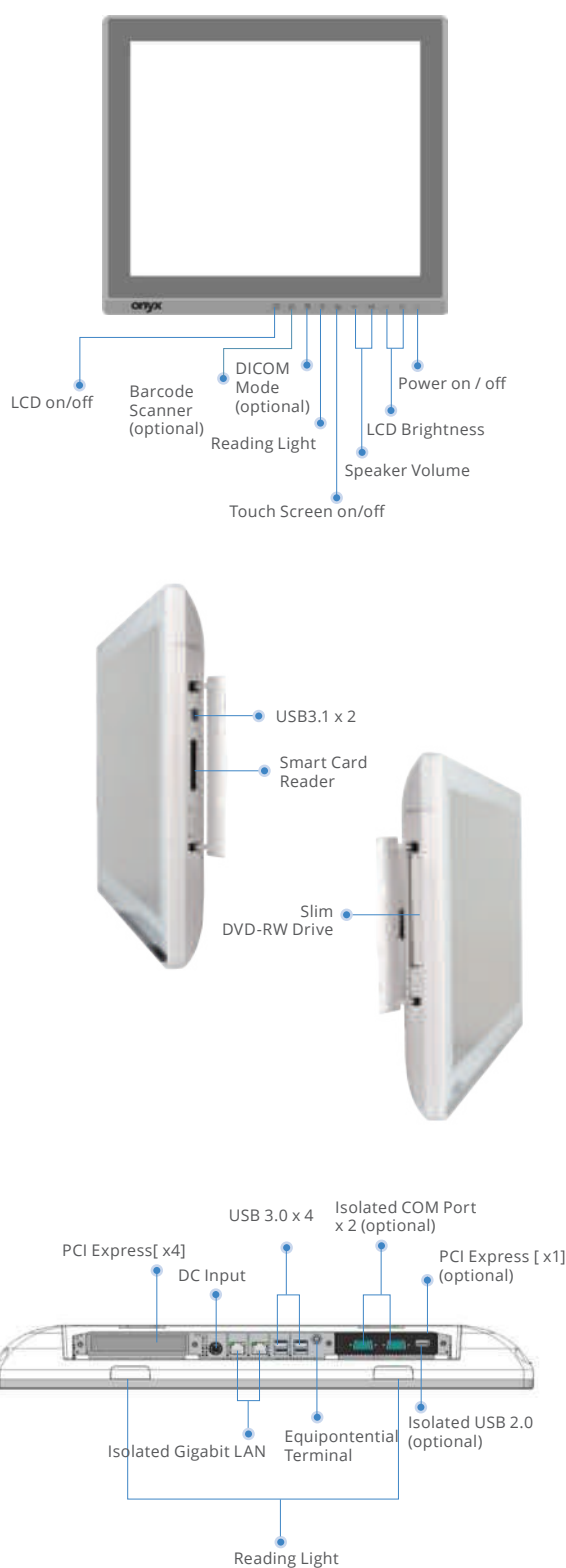

Features

- Intel® 7th Generation Core i7-7600U 3.9GHz Dual Core Processor
- 19" 250-nit SXGA LCD
- Supports DDR4 SODIMM up to 32GB
- Capacitive Multi-Touch Screen / 5 Wire Resistive Touch Screen
- Easy Cleaning Flat Screen
- 10 Programmable Smart Function Keys with Dual Colors LED Status Indication
- LAN/USB(optional)/COM(optional) Medical Isolation
- Super Speed 10Gb/s USB 3.1 Port
- PCI Express[x4] x 1, PCI Express[x1] , PCI x1(optional)
- Trusted Platform Module / Smart Card Reader(optional) / RFID Reader (optional)
- Remote Management: Intel Active Management Technology
- +12V to +24V wide range DC input
- 25Wh Backup Battery(optional)

Specifications

Main Specifications

Processor	Intel® 7th Generation Core i7-7600U 3.9GHz Dual Core
System Memory	DDR4 SODIMM up to 32GB
Expansion	PCI Express[x4] x 1, PCI Express[x1] , PCI x1(optional)
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1 Slim DVD-RW Drive x 1(optional) M.2 SSD x 1
Security	Trusted Platform Module, Smart Card reader(optional), RFID(optional)
Wireless Communication	802.11a/b/g/n/ac(optional), Bluetooth 4.0 (optional)
Speaker	5W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down, LCD On/Off, Touch Screen On/Off, DICOM Mode(optional), Reading Light On/Off
Power Requirement	DC 12~24V, 22Wh Back Up Battery(optional)
OS Support	Windows® 7, Windows® 8.1, Windows® 10, Linux®

Display

Size	19" LCD
Resolution	1280x1024
Luminance	250 nits
View Angle	170°(H)/160°(V)
Contrast Ratio	1000:1
Back Light Life Time	30,000 Hours
Touch Screen	Capacitive Multi-Touch/5-Wire Resistive

I/O


USB	USB 3.0 x 4, USB 3.1 x 2(in side I/O), Isolated USB 2.0 x1(optional)
Serial Port	Isolated RS-232 x 2(optional)
Ethernet	Isolated Gigabit LAN x 2
Audio	Mic(optional)/ Line out(optional)
Video Out	Display Port x 2(optional)

Mechanical and Environmental

Power Consumption	Full Loading: 55 Watts
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	IP65 in the front, IP54 in the back
Dimension	450 x 388 x 66 mm
Package Size	640 x 220 x 520mm
Gross Weight	11 kg (24.25 lb)
Net Weight	7kg (15.43lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

19" Fanless Smart View 7th Generation Core i7 Multi-Touch Medical Station

Dimension / Unit: mm

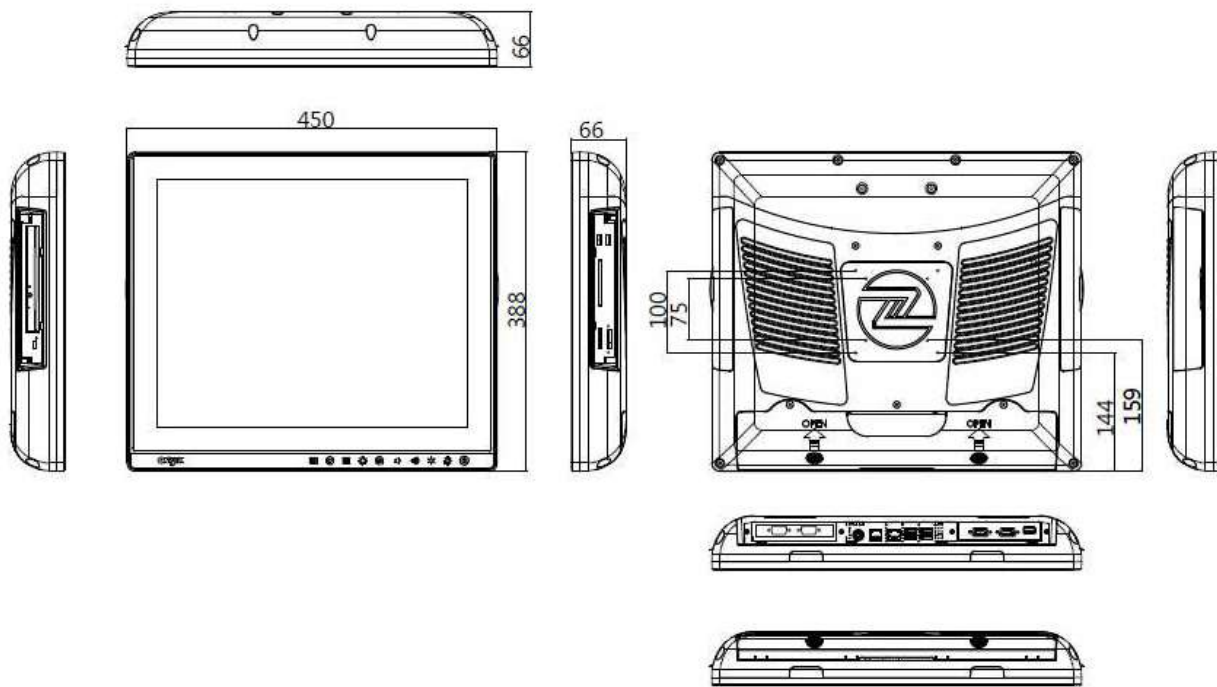

Ordering Information

- » ZEUS-198ST-A5-1010
i7-7600U.4GB RAM.19" LCD.12~24V DC.Capacitive Touch
- » ZEUS-198ST-A6-1010
i5-7300U.4GB RAM.19" LCD.12~24V DC.Capacitive Touch
- » ZEUS-198ET-A5-1010
i7-7600U.4GB RAM.19" LCD.12~24V DC.Resistive Touch
- » ZEUS-198ET-A6-1010
i5-7300U.4GB RAM.19" LCD.12~24V DC.Resistive Touch

Optional Accessories

- » 1255301202
Medical Power Adapter, 120W, 24V
- » OPM-C16W-A6
Mini Card WLAN Kit, IEEE 802.11a/b/g/n + Bluetooth 4.0
- » OPM-T003-A5
Slim Slot-in DVD-RW Drive
- » OPM-T006-A1
Smart Card Reader Kit
- » OPM-P09C-A1
25Wh Backup Battery
- » OPM-C02C-A4
Two Isolated RS-232 PCIe Card
- » OPM-C02C-A3
One Isolated USB 2.0 + Two Isolated R-232 PCIe Card
- » OPM-V03B-A1
One Display Port + Two RS-232 Kit
- » OPM-V03B-A2
One Display Port Kit
- » OPM-T017-A3
Hot Swap Rack w/Lock Kit for 2.5" HDD/SSD
- » OPM-T012-A2
Two RS-232 Kit
- » OPM-V04B-A1
DICOM Kit
- » OPM-R02X-A1
PCI Express [X1] Riser Kit
- » OPM-R01P-A1
PCI Riser Kit
- » OPM-U01T-A1
Line-out/Line-in/Mic Kit
- » OPM-S07R-A3
RFID Reader- Kit

Operating Room Solution

In a digital operating room, important information and images such as patient vital signs, surgical images, and xray images need to be displayed all at once. With the latest technology, ACCEL series offers large screen ultra high definition 4K resolution display, Intel Xeon / Core i7 quad core processor, AMD Ryzen Embedded V1000 Processor capacitive multi-touch screen and multiple video inputs to improve display quality and work efficiency.



32/27-inch 4K UHD High Resolution & High Brightness Display

- » Intel Quad Core Xeon Platform / AMD Ryzen Embedded V1000 Processor
- » Triple PCI Express Slot for High End Graphics, Fiber LAN and UHD Video Capture
- » Enhance functional for Medical Imaging
- » IP54 Certified, Antimicrobial Surface Coatin and Fanless

32/27-inch 4K UHD High Resolution & High Brightness Display

ACCEL series offers 32/27-inch 3240x2160 resolution high brightness display for high resolution medical imaging



Intel® Quad Core Xeon Platform

For mission-critical medical application, Intel Quad Core Xeon Processor provides cutting edge computing power and ECC(Error-correcting code) memory helps preserve the integrity of your data, prevent data corruption, and prevent system crashed and failures.



Triple PCI Express Slot for High End Graphics, Fiber LAN and UHD Video Capture

ACCEL surgical station provide one PCI Express[x16] slot, one PCI Express[x4] slot and one PCI Express[x1] slot for installing high end graphics card, NVIDIA Tesla GPU accelerator, fiber 10GbE LAN card and 4K UHD video capture card.



Enhance functional for Medical Imaging

ACCEL surgical monitor provides the embedded solutions for Medical Imaging, the multipicture functionality and backlight sensor could automatic to adjust the image to ensure a user has the most clearly diagnostic.



IP54 Certified, Antimicrobial Surface Coatin and Fanless



ACCEL surgical monitor has IP54 certified gives the complete protection against contact from dust and powerful jets of water. and the Antimicrobial Surface Coating which could provide the best clean and healthy environment



Operating Room Solution

ACCEL-A3201

32" 4K UHD Smart View 6th Generation Xeon / Core i7 Multi-Touch Surgical Station

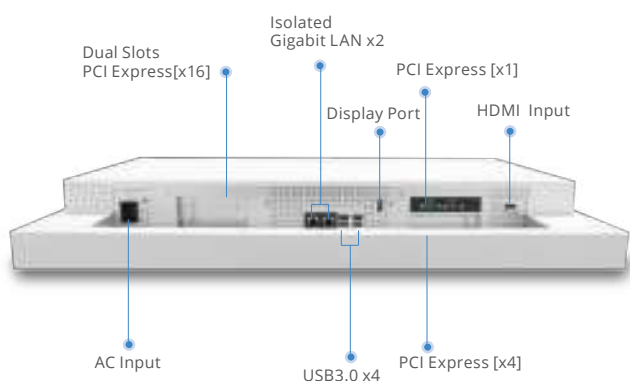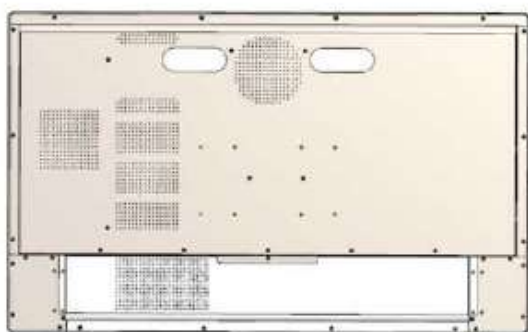

Features

- Intel® 6th Generation Xeon E3-1505M v5 2.8GHz Quad Core / Core i7-6820EQ 2.8GHz Quad Core
- Supports ECC / Non-ECC DDR4 SODIMM up to 32GB
- 32" UHD 3840x2160 350-nit High Contrast LCD
- Capacitive Multi-Touch Screen
- 5 Programmable Smart Function Keys with Dual Colors LED Status Indication
- LAN/USB(optional)/COM(optional) Medical Isolation
- Dual Slots PCI Express[x16] x1 for High End Graphics Card /GPU Accelerator Card up to 300W
- PCI Express[x4] x1, PCI Express[x1]x1
- Trusted Platform Module 2.0
- Remote Management: Intel Active Management Technology
- 100V to 240V AC Input

Specifications

Main Specifications

Processor	Intel® 6th Generation Xeon E3-1505M v5 2.8GHz Quad Core / Core i7-6820QE 2.8GHz Quad Core
Chipset	CM236 (for Xeon) / QM170(for Core i7)
System Memory	ECC (for Xeon) / Non-ECC (for Core i7) DDR4 SODIMM up to 32GB
Expansion	PCI Express[x16] x1, PCI Express[x4] x1, PCI Express[x1] x1
Storage Disk Drive	2.5" SATA Hard Disk Drive/Solid State Disk Drive x2
Security	Trusted Platform Module 2.0
Wireless Communication	802.11ac/a/b/g/n, Bluetooth V4.1/ 5
Speaker	5W x 2
Function Key	Power On/Off, LCD, Brightness Up/Down, Touch Screen On/Off, Video Input Select
Power Requirement	100~240V AC
OS Support	Windows® 7, Windows® 10, Linux®

Display

Size	32" LCD
Resolution	3840 x 2160
Luminance	350 nits
View Angle	178°(H)/178°(V)
Contrast Ratio	1000:1
Back Light Life Time	30,000 Hours
Touch Screen	Capacitive Multi-Touch

I/O


USB	USB 3.0 x4
Serial Port	Isolated RS-232 x2(optional)
Ethernet	Isolated Gigabit LAN x2
Audio	Mic(optional), Line out(optional)
Video Out	Display Port 1.4 x1
Video In	HDMI x1

Mechanical and Environmental

Power Consumption	Full loading: 90 Watts
Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 100mm
Degree of Protection	IP54 in the front, IPX1 in the back
Dimension	778 x 478 x 102mm
Package Size	910 x 618 x 220 mm
Gross Weight	21.5 kg
Net Weight	18.5 kg
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

32" 4K UHD Smart View 6th Generation Xeon / Core i7 Multi-Touch Surgical Station

Dimension / Unit: mm

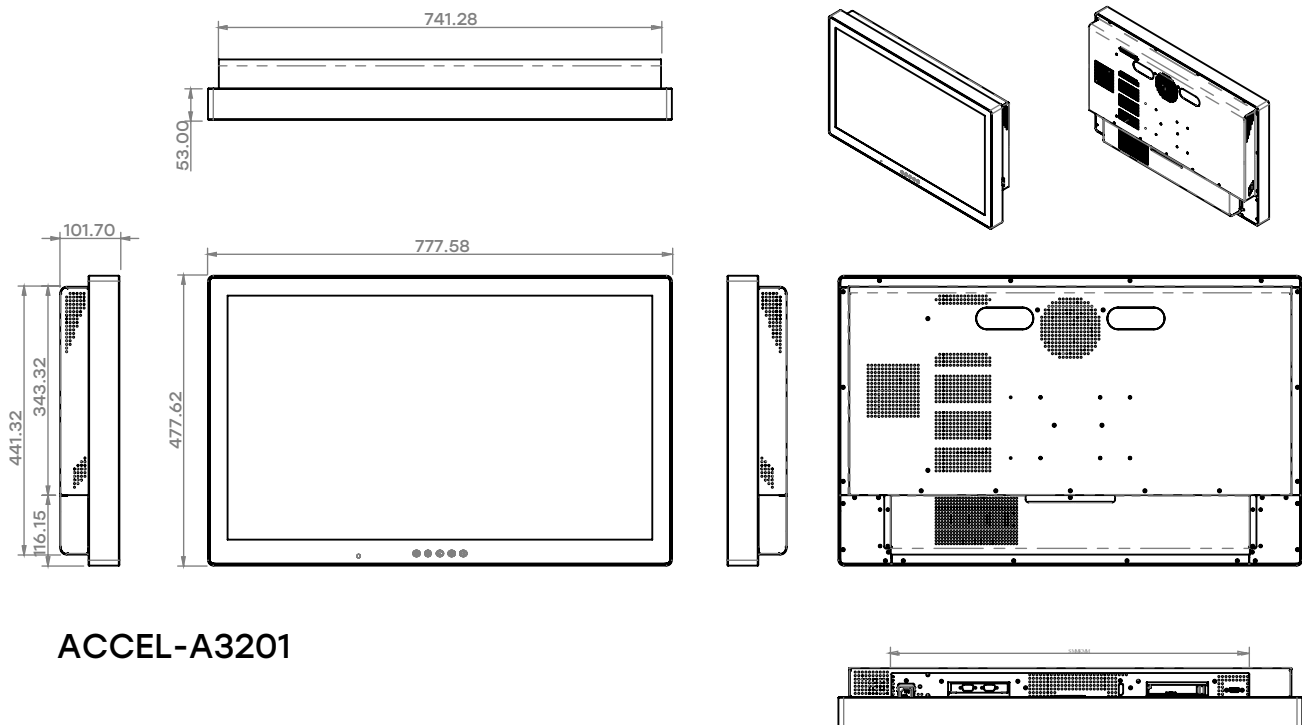

ACCEL-A3201



Ordering Information

- » ACCEL-A3201-P1-A1-0010
OR Station.Xeon E3-1505M v5.32" UHD 350-nit.System Fan.AC 100~240V.Capacitive Touch
- » ACCEL-A3201-P2-A1-0010
OR Station.i7-6820EQ.32" UHD 350-nit.System Fan.AC 100~240V.Capacitive Touch
- » ACCEL-A3201-P1-A11-0010
OR Station. Xeon E3-1505M v5.32" UHD 350-nit.System Fan.AC 100~240V.Capacitive Touch. NVIDIA QUADRO RTX4000
- » ACCEL-A3201-P2-A11-0010
OR Station.i7-6820EQ.32" UHD 350-nit.System Fan.AC 100~240V.Capacitive Touch .NVIDIA QUADRO RTX4000



Optional Accessories

- » OPM-C12W-A6
WLAN Kit, Qualcomm Atheros IEEE 802/11ac/a/b/g/n + Bluetooth 4.1
- » OPM-C15W-A6
WLAN Kit, 802.11a/b/g/n/ac + BT 5
- » OPM-C02C-A3
One Isolated USB 2.0 + Two Isolated RS-232 PCIe Card
- » OPM-C02C-A4
Two Isolated RS-232 PCIe Card
- » 9789320100
IR Remote Control for Display Setting
- » OPM-H08S-A2
Desktop Stand, White Color, VESA 75/100, 385mm Height .

Operating Room Solution

ACCEL-A2701

27" 4K UHD Smart View 6th Generation Xeon / Core i7 Multi-Touch Surgical Station

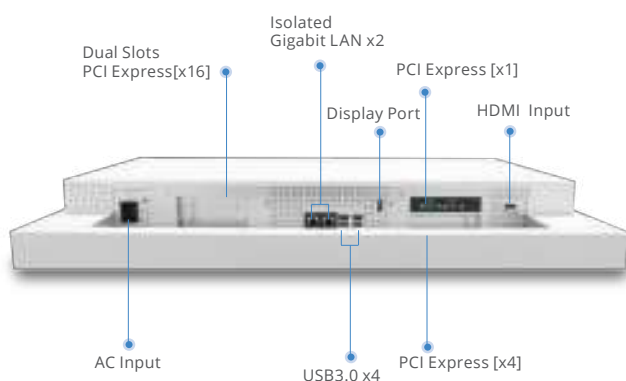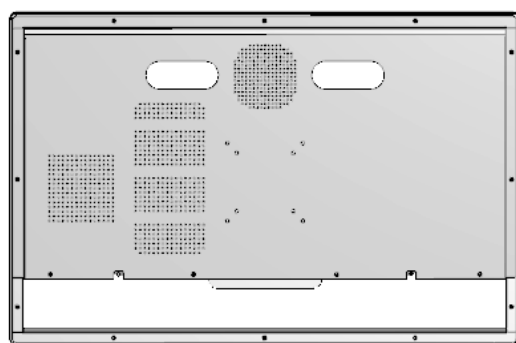

Features

- Intel® 6th Generation Xeon E3-1505M v5 2.8GHz Quad Core / Core i7-6820EQ 2.8GHz Quad Core
- Supports ECC / Non-ECC DDR4 SODIMM up to 32GB
- 27" UHD 3840x2160 350-nit High Contrast LCD
- Capacitive Multi-Touch Screen
- 5 Programmable Smart Function Keys with Dual Colors LED Status Indication
- LAN/USB(optional)/COM(optional) Medical Isolation
- Dual Slots PCI Express[x16] x1 for High End Graphics Card /GPU Accelerator Card up to 300W
- PCI Express[x4] x1, PCI Express[x1]x1
- Trusted Platform Module 2.0
- Remote Management: Intel Active Management Technology
- 100V to 240V AC Input

Specifications

Main Specifications

Processor	Intel® 6th Generation Xeon E3-1505M v5 2.8GHz Quad Core / Core i7-6820QE 2.8GHz Quad Core
Chipset	CM236 (for Xeon) / QM170(for Core i7)
System Memory	ECC (for Xeon) / Non-ECC (for Core i7) DDR4 SODIMM up to 32GB
Expansion	PCI Express[x16] x1, PCI Express[x4] x1, PCI Express[x1] x1
Storage Disk Drive	2.5" SATA Hard Disk Drive/Solid State Disk Drive x2
Security	Trusted Platform Module 2.0
Wireless Communication	802.11ac/a/b/g/n, Bluetooth V4.1/ 5
Speaker	5W x 2
Function Key	Power On/Off, LCD, Brightness Up/Down, Touch Screen On/Off , Video Input Select
Power Requirement	100~240V AC
OS Support	Windows® 7, Windows® 10, Linux®

Display

Size	27" LCD
Resolution	3840 x 2160
Luminance	250 nits
View Angle	178°(H)/178°(V)
Contrast Ratio	1000:1
Back Light Life Time	30,000 Hours
Touch Screen	Capacitive Multi-Touch

I/O


USB	USB 3.0 x4
Serial Port	Isolated RS-232 x2(optional)
Ethernet	Isolated Gigabit LAN x2
Audio	Mic(optional), Line out(optional)
Video Out	Display Port 1.4 x1
Video In	HDMI x1

Mechanical and Environmental

Power Consumption	Full loading : 90 Watts
Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 100mm
Degree of Protection	IP54 in the front, IPX1 in the back
Dimension	676 x 429 x 102 mm
Package Size	TBD
Gross Weight	TBD
Net Weight	13.5 kg (29.76 lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

27" 4K UHD Smart View 6th Generation Xeon / Core i7 Multi-Touch Surgical Station

Dimension / Unit: mm

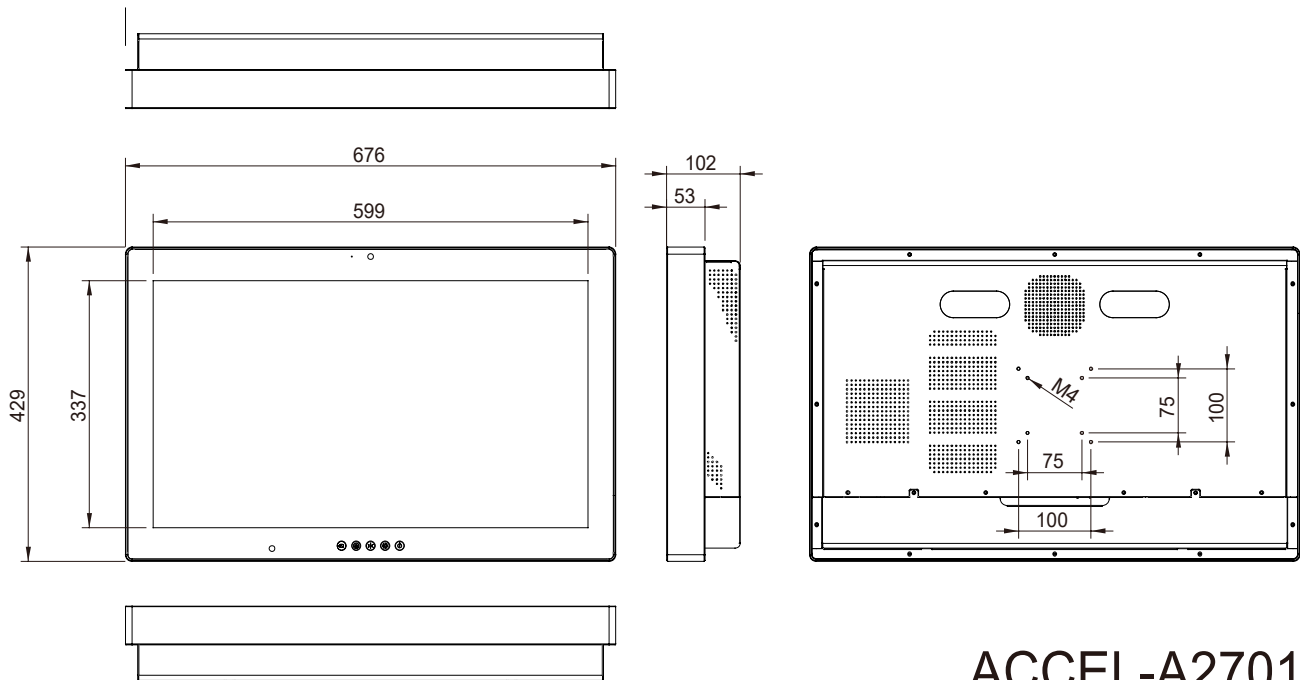

Ordering Information

- » ACCEL-A2701-P1-A1-0010
OR Station. Xeon E3-1505M v5. 27" UHD. AC 100~240V. Capacitive Touch
- » ACCEL-A2701-P2-A1-0010
OR Station. i7-6820EQ. 27" UHD. AC 100~240V. Capacitive Touch
- » ACCEL-A2701-P1-A11-0010
OR Station. Xeon E3-1505M v5. 27" UHD. AC 100~240V. Capacitive Touch. NVIDIA QUADRO RTX4000
- » ACCEL-A2701-P2-A11-0010
OR Station. i7-6820EQ. 27" UHD. AC 100~240V. Capacitive Touch. NVIDIA QUADRO RTX4000

Optional Accessories



- » OPM-C12W-A6
WLAN Kit, 802.11a/b/g/n/ac + BT 4.1
- » OPM-C15W-A6
WLAN Kit, 802.11a/b/g/n/ac + BT 5
- » 9789320100
Remote Control for Display Setting
- » OPM-C02C-A3
One Isolated USB 2.0 + Two Isolated RS-232 PCIe Card
- » OPM-C02C-A4
Two Isolated RS-232 PCIe Card
- » OPM-H08S-A1
Desktop Stand, White Color, VESA 75/100, 390mm Height Max.

ACCEL-A3202

32" 4K UHD Smart View AMD Ryzen Embedded V1000 Multi-Touch Surgical Station



Video Input Select
Power on / off
LCD Brightness
Touch Screen on/off

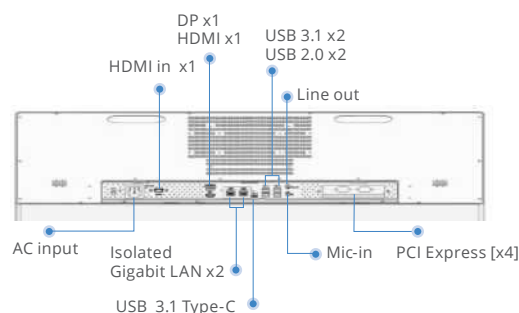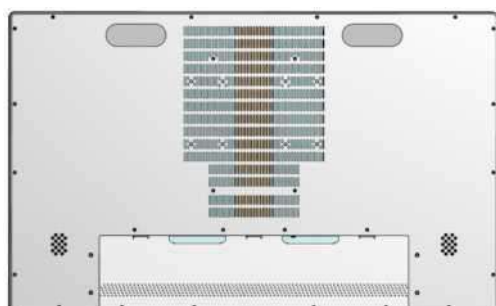

Features

- AMD Ryzen Embedded V1605B Quad Core up to 3.6GHz
- Supports ECC / Non-ECC DDR4 SODIMM up to 32GB
- 32" UHD 3840x2160 350-nit High Contrast LCD
- Capacitive Multi-Touch Screen
- 5. Programmable Smart Function Keys with Dual Colors LED Status Indication
- PCI Express[x4] x1
- Support 3x 4K monitors with Display Port 1.2 x1 & HDMI 2.0 x1 & USB 3.1 Type-C
- 100V to 240V AC Input

Specifications

Main Specifications

Processor	AMD Ryzen Embedded V1605B 3.6GHz Quad Core
System Memory	ECC / Non-ECC DDR4 SODIMM up to 32GB
Expansion Interface	PCI Express[x4] x1
Storage Disk Drive	2.5" SATA Hard Disk Drive/Solid State Disk Drive x1
Security	fTPM 2.0
Wireless Communication	802.11ac/a/b/g/n, Bluetooth V4.1 / V4.2
Speaker	5W x 2
Function Key	Power On/Off, LCD Brightness Up/Down, Touch Screen On/Off, Video Input Select
Power Requirement	100~240V AC
OS Support	Windows® 10, Linux®

Display

Size	32" LCD
Resolution	3840 x 2160
Luminance	350 nits
View Angle	178°(H)/178°(V)
Contrast Ratio	1000:1
Back Light Life Time	30,000 Hours
Touch Screen	Capacitive Multi-Touch

I/O


USB	USB 3.1 Type-C x 1, USB 3.1 Type-A x 2, USB 2.0 x2
Serial Port	Isolated RS-232 x2(optional)
Ethernet	Gigabit LAN x2
Audio	Mic, Line out
Video In	HDMI x1
Video Out	Display Port 1.2 x1, HDMI 2.0 x1, USB 3.1 Type-C x1

Mechanical and Environmental

Power Consumption	Full loading : 80 Watts
Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 100mm
Degree of Protection	IP54 in the front, IPX1 in the back
Dimension	778 x 478 x 53 mm
Package Size	910 x 618 x 220 mm
Gross Weight	17.5 kg (38.58 lb)
Net Weight	14.5 kg (31.96 lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

32" 4K UHD Smart View AMD Ryzen Embedded V1000 Multi-Touch Surgical Station

Dimension / Unit: mm

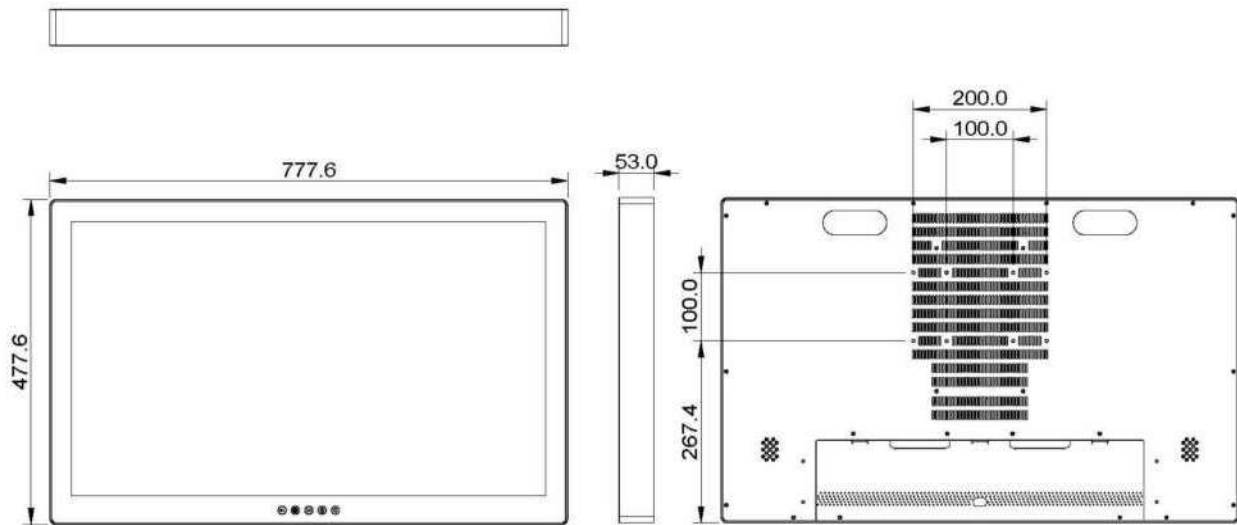

Ordering Information

- » ACCEL-A3202-P1-A1-0010
OR Station.Ryzen V1605B.32" UHD 350-nit.AC 100~240V.PCT

Optional Accessories



- » OPM-C12W-A6
WLAN Kit, Qualcomm Atheros IEEE 802/11ac/a/b/g/n + Bluetooth 4.1
- » OPM-C15W-A6
WLAN Kit, 802.11a/b/g/n/ac + BT 5
- » OPM-C02C-A3
One Isolated USB 2.0 + Two Isolated RS-232 PCIe Card
- » OPM-C02C-A4
Two Isolated RS-232 PCIe Card
- » 9789320100
IR Remote Control for Display Setting
- » OPM-H08S-A2
Desktop Stand, White Color, VESA 75/100, 385mm Height .

ACCEL-A2702

27" 4K UHD Smart View AMD Ryzen Embedded V1000 Multi-Touch Surgical Station



Video Input Select
Power on / off
LCD Brightness
Touch Screen on/off

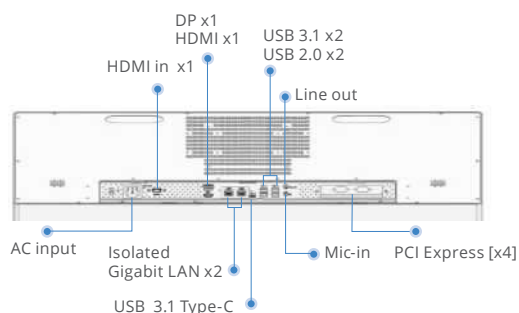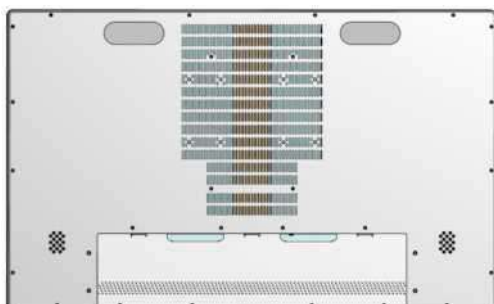

Features

- AMD Ryzen Embedded V1605B Quad Core up to 3.6GHz
- Supports ECC / Non-ECC DDR4 SODIMM up to 32GB
- 27" UHD 3840x2160 350-nit High Contrast LCD
- Capacitive Multi-Touch Screen
- 5. Programmable Smart Function Keys with Dual Colors LED Status Indication
- PCI Express[x4] x1
- Support 3x 4K monitors with Display Port 1.2 x1 & HDMI 2.0 x1 & USB 3.1 Type-C
- 100V to 240V AC Input

Specifications

Main Specifications

Processor	AMD Ryzen Embedded V1605B 3.6GHz Quad Core
System Memory	ECC / Non-ECC DDR4 SODIMM up to 32GB
Expansion Interface	PCI Express[x4] x1
Storage Disk Drive	2.5" SATA Hard Disk Drive/Solid State Disk Drive x1
Security	fTPM 2.0
Wireless Communication	802.11ac/a/b/g/n, Bluetooth V4.1 / V4.2
Speaker	5W x 2
Function Key	Power On/Off, LCD Brightness Up/Down, Touch Screen On/Off, Video Input Select
Power Requirement	100~240V AC
OS Support	Windows® 10, Linux®

Display

Size	27" LCD
Resolution	3840 x 2160
Luminance	350 nits
View Angle	178°(H)/178°(V)
Contrast Ratio	1000:1
Back Light Life Time	30,000 Hours
Touch Screen	Capacitive Multi-Touch

I/O


USB	USB 3.1 Type-C x 1, USB 3.1 Type-A x 2, USB 2.0 x2
Serial Port	Isolated RS-232 x2(optional)
Ethernet	Gigabit LAN x2
Audio	Mic, Line out
Video In	HDMI x1
Video Out	Display Port 1.2 x1, HDMI 2.0 x1, USB 3.1 Type-C x1

Mechanical and Environmental

Power Consumption	Full loading : 80 Watts
Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 100mm
Degree of Protection	IP54 in the front, IPX1 in the back
Dimension	676 x 429 x 53 mm
Package Size	TBD
Gross Weight	TBD
Net Weight	11.3 kg (24.91 lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

27" 4K UHD Smart View AMD Ryzen Embedded V1000 Multi-Touch Surgical Station

Dimension / Unit: mm

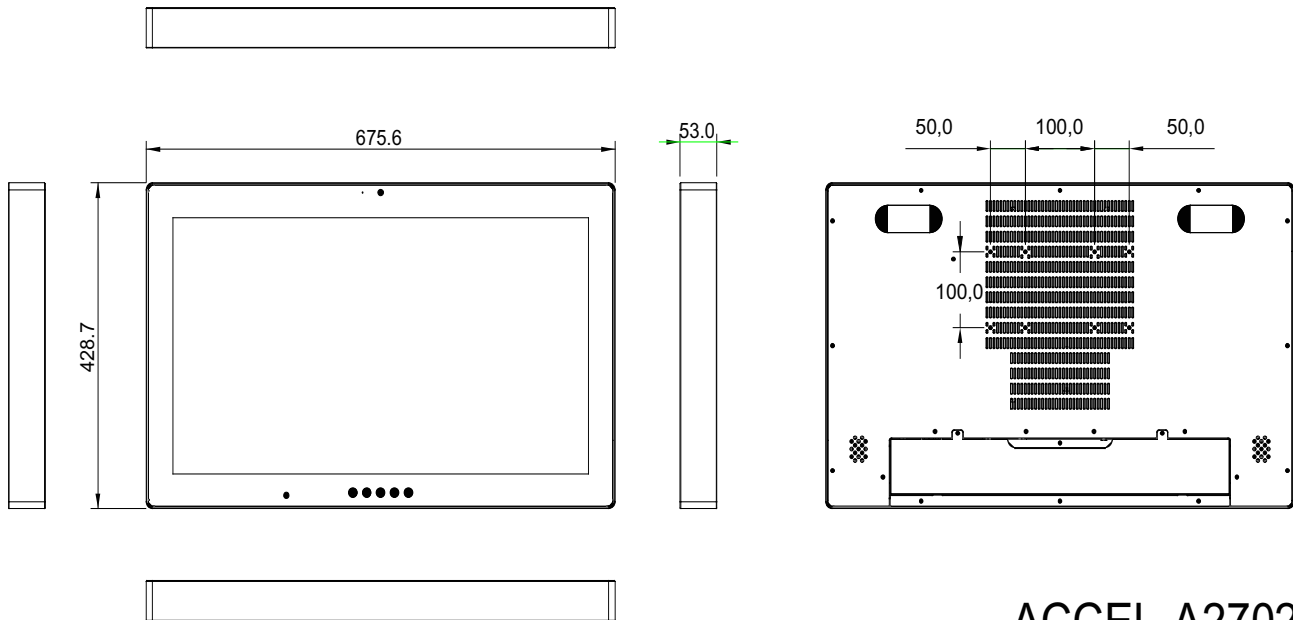

ACCEL-A2702



Ordering Information

- » ACCEL-A2702-P1-A1-0010
OR Station.V1605B.32" UHD.AC 100~240V.Capacitive Touch


Optional Accessories

- » OPM-C12W-A6
WLAN Kit, 802.11a/b/g/n/ac + BT 4.1
- » OPM-C15W-A6
WLAN Kit, 802.11a/b/g/n/ac + BT 5
- » 9789320100
Remote Control for Display Setting
- » OPM-C02C-A3
One Isolated USB 2.0 + Two Isolated RS-232 PCIe Card
- » OPM-C02C-A4
Two Isolated RS-232 PCIe Card
- » OPM-H08S-A1
Desktop Stand, White Color, VESA 75/100, 390mm Height Max.

Operating Room Solution

ACCEL-M3201

32" 4K-UHD Medical LCD Monitor

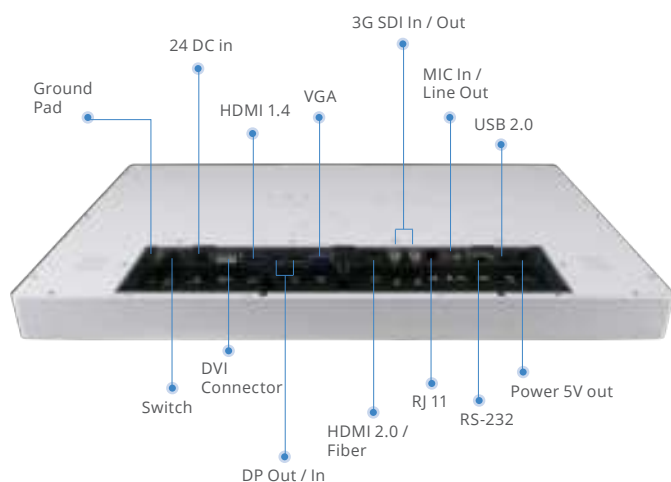

Features

- 32" Display with UHD 4K (3840 x 2160) native resolution
- Thin and compact design with impact resistant screen
- Fanless and ventless design, easy-to-clean
- Wide view angle 178°(H)/178°(V)
- True Flat Screen with PCT Touch
- Invisible OSD Design
- Antimicrobial Surface Coating

Specifications

Display

Size	32"
Resolution	3840 x 2160 (UHD 4K)
Aspect Ratio	16:9, Full, 16:10, 4:3, 5:4, 1:1
Brightness (Typ.)	350 nits
Viewing Angle (CR=10)(Typ.)	178°(H)/178°(V)
Contrast Ratio (Typ.)	1000:1
Touch Screen	Projective capacitive touch screen (optional)

System

OS Support	Windows® XP, Windows® 7, Windows® 10
Image Support	DICOM, Gamma correction, 3DLUT, 1DLUT(optional)
Further Features	Ambient light sensor, IR Control

I/O

Input Signal	3G SDI x 1, VGA x 1, HDMI 2.0 x1 Dual DVI in x1, DP 1.2 x1, HDMI 1.4 x1, Audio In x1
Output Signal	DP (Multi-Stream Transport) x 1 Audio Out x 1 5V out x 1 SDI (Loop Through), support to 1080P* x 1

Mechanical and Environmental

Power Consumption	24V DC in 150W, with external 110-240V AC to DC Adapte
Operating Temperature	5°C ~ 40°C(41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C(14°F ~ 140°F)
Storage Humidity	10%~90%@35°C, non-condensing
Housing	Antimicrobial Surface Coating
IP Rating	Protection: front IP65 - rear IP22
Dimension	777.58 x 477.62 x 48 mm
Package Size	980 x 260 x 700 mm
Gross Weight	13 kg (28.66 lb)
Net Weight	11 kg (24.25 lb)
Certifications	CE: EN 60601-1:2005 + A1:2015 (Ed. 4.0) EN 60601-1:2006/A1:2013/A12:2014(V3.1) UL : ANSI/AAMI ES60601-1:2005/ A1:2012 and C1:2009/(R)2012 and A2:2010/(R)2012 cUL: CAN/CSA-C22.2 No.60601-1:14 FCC part 15B

Order information

» ACCEL-M3201-P00-A1-0000

32" 4K UHD.350nits LCD Monitor, P-Cap.3G SDI x1, VGA x1, HDMIx21.
DVI x1, DP x1.Med adapter

» ACCEL-M3201-G00-A1-0000

32" 4K UHD.350nits LCD Monitor.3G SDI x1, VGA x1, HDMIx1.DVI x1,
DP x1.Med adapter

Operating Room Solution

ACCEL-VM500

Medical Video Management System with 9th Generation Intel Xeon / Core i7 CPU



Features

- Intel® Xeon E-2278GE 3.3GHz / Core i7-9700E 2.6Ghz
- Supports ECC DDR4 DIMM up to 64GB memory
- Support windows video recording and video management software
- An open SDK enable user to integrate the product into environment or workflow management system
- Support Three 4K Displays: HDMI x 2, DP x 1
- Multi channels are supported to record 4K and FHD medical videos simultaneously
- Support PCIe [16] x 1, for High end graphic card (250W)

Application

- Equipment control
- Video recording in OR room

Specifications

Main Specifications

Processor	Intel® Xeon E-2278GE 3.3GHz / Core i7-9700E 2.6Ghz
System Memory	Supports ECC DDR4 2133 DIMM x 4 up to 64GB
Chipset	Intel® C246
OS Support	Windows® 10 , Linux (optional)
Storage Disk Drive	2.5" SATA x 2, M.2 SSD x 1
TPM	2.0

I/O

USB	USB 3.1 Gen2 x 6 & USB 3.1 Gen1 x 4
Ethernet	Gigabit LAN x 2
Video Out	DP x 1, VGA x 1, HDMI x 2
Audio	Line-in, Mic-in, Line-out
Series Ports	COMx2
Extension area	M.2 E key (2230) for WIFI x1, PCIe [x16] x1 PCIe [x4] x2 , PCIe [x1] x 1
Optional Capture I/O	4Kp60: HDMI 2.0 in FHD:1xHDMI, 1xDVI-I, 1xYPbPr, 1xSDI, 1xCVBS, 1xS-Video

Mechanical and Environmental

Power Consumption	100V to 240V AC Input, 500W
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Dimension	TBD
Package Size	TBD
Gross Weight	TBD
Net Weight	TBD

Slim Fanless Medical Panel PC

The Slim Medical Panel PC is designed to meet the requirements and still be cost effective. It is running an Intel Atom processor, and it included all necessary input slots within its ultra slim chassis. The flexibility of slim fanless all in one medical panel PC is perfect for hospital applications such as mobile nursing station, wall-mount diagnosis panel, pharmacy automation and hospital administration automation.



Fanless Slim Panel PC Solution

- » Green Operation
- » Flexible Power Input
- » High Speed Wireless Data Transmission
- » Processing in Compact Size
- » Small to large LCD Choices
- » Quiet, Clean & Easy Maintenance

+ Small to Large LCD Choices

Slim Medical Panel PC offers four LCD sizes to fulfill the requirements of various hospital applications. 10.1" (Resolution:1280x800), 12"(Resolution:1366x768), 15.6"(Resolution:1920x1080), 17"(Resolution:1280x1024), 18.5"(Resolution:1366x768).



+ Quiet, Clean & Easy to Maintain

Slim Medical Panel PCs utilize a large fanless heatsink on the back cover to efficiently dissipate heat generated from the processor and chipset. The Fanless cooling design keeps the environment quiet, clean and lowers maintenance efforts.



+ Green & Compact Size for Operation

Less than 50W power consumption keeps Slim Medical Panel PC operating and extends the battery life of mobile medical carts. With narrow edge and monitor like chassis, it is easy and space friendly to users.



+ Wide Range Power Input for Different Carts

Slim Medical Panel PCs are designed to accept +9V to +30V DC power input. This wide range power input allows ease of operation with the battery source. It can integrate with Metro, Ergatron, ITD, Howard, and all major computer carts seamlessly.



+ Dual Antennas with Best WLAN performance





With two antennas built into the Slim Medical Panel PCs, massive medical records and PACS images can be transferred through IEEE 802.11ac/a/b/g/n wireless LAN up to 300Mbps/sec.



Fanless Slim Panel HIT Solution

ONYX-BE182

18.5" Fanless J1900 Quad Core Slim Medical Panel PC

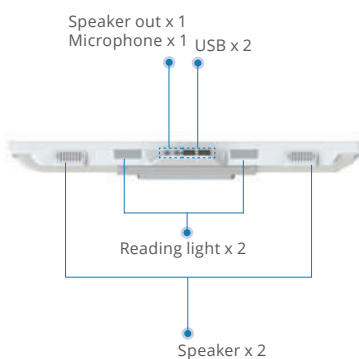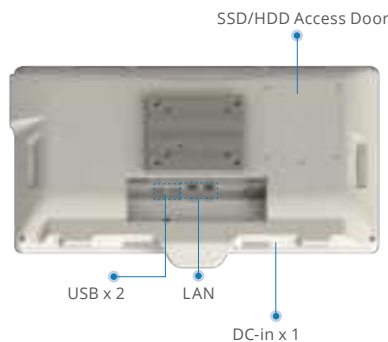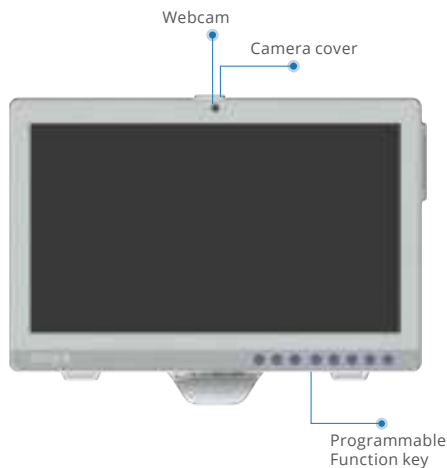

Features

- Intel® J1900 2.42GHz Quad Core Processor
- 18.5" Wide Color TFT LCD Touch Terminal
- PCT for supporting Multi-Touch
- Wire Remote-Control w/ Handset Function
- VOIP Phone, Webcam, High Quality Speaker, MSR, Smart Card Reader
- Reading Light
- Extension Feature: RFID, Barcode Scanner
- IP65 Water Proof in front
- EN 60601-1, UL 60601-1

Specifications

Main Specifications

Processor	Intel® Celeron J1900 Quad Core 2.42GHz
System Memory	Supports DDR3 SODIMM up to 8GB
Expansion Interface	Mini Card x 2
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1
Security	Trusted Platform Module, Smart Card Reader (optional), MSR (optional), RFID (optional)
Wireless communication	802.11b/g/n(optional), Bluetooth 4.0 (optional)
Speaker	3W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down
Power Requirement	DC 12~24V
OS Support	Windows 7, Window 10, Linux

Display

Size	18.5" (16:9) Color TFT LCD
Resolution	1366 x 768 / 1920 x 1080 FHD (optional)
Max. Colors	16.7M
Luminance	250 nits / 350nits (optional)
View Angle	170(H)/160(U)
Contrast Ratio	1000:1
MTBF	30,000 Hours
Touch Screen	Projected Capacitive Touch / 5-Wire Resistive Touch

I/O


USB	USB2.0 x 4
Serial Port	Isolated RS-232 x 1
Ethernet	Isolated Gigabit LAN x 2
Audio	Mic-in, Line-out

Mechanical and Environmental

Infection Control	Anti-Bacteria (optional)
Power Requirement	DC 12V ~24V
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of protection	Front Panel: IP65; Whole Unit: IPX1
Dimension	463 x 336 x 48.3 mm
Package Size	721 x 224 x 464 mm
Gross Weight	8kg (17.63 lb)
Net Weight	4.2 kg (9.25 lb)
Certifications	CE: EN 60601-1-2:2015, EN 60601-1:2006/A1:2013 FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 cUL: CAN/CSA-C22.2 No. 60601-1:2014

18.5" Fanless J1900 Quad Core Slim Medical Panel PC

Dimension / Unit: mm

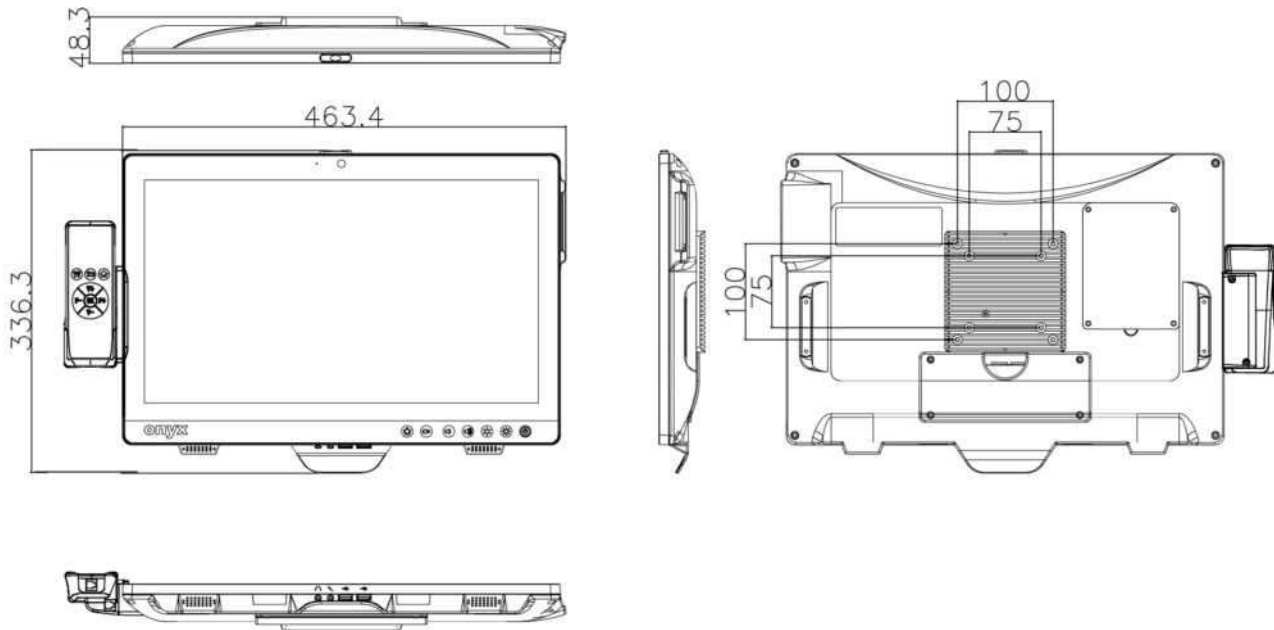

Ordering Information

- | | |
|---|--|
| <p>» ONYX-BE182DT-A1-1010
18.5" Infotainment Terminal. Intel Quad-Core J1900. 2G RAM. Fanless. Resistive Touch. Reading Light. Webcam. Smart Card Reader</p> <p>» ONYX-BE182DT-F1-1010
18.5" Infotainment Terminal. Intel Quad-Core J1900. 2G RAM. Fanless. Resistive Touch. Reading Light. Webcam. Smart Card Reader. RFID</p> | <p>» ONYX- BE182DT-A2-1010
18.5" Infotainment Terminal. Intel Quad-Core J1900. 2G RAM. Fanless. PCT Touch. Reading Light. Webcam. Smart Card Reader</p> <p>» ONYX-BE182DT-F2-1010
18.5" Infotainment Terminal. Intel Quad-Core J1900. 2G RAM. Fanless. PCT Touch. Reading Light. Webcam. Smart Card Reader. RFID</p> |
|---|--|



Optional Accessories

- » 1255300657
Medical Power Adapter, 60W, 24V
- » OPM-T018-A1
Handset and Wire Remote Control
- » OPM-T018-A2
Handset and Wire Remote Control + 2D Barcode Scanner
- » OPM-C16W-A5
WLAN kit. 802.11 a/b/g/n + Bluetooth 4.0LE/ 3.0HS/ 2.1EDR for BE182
- » OPM-S02C-A1
MSR for BE381

Fanless Slim Panel HIT Solution

ONYX-1731

17" Fanless J1900 Quad Core Slim Medical Panel PC

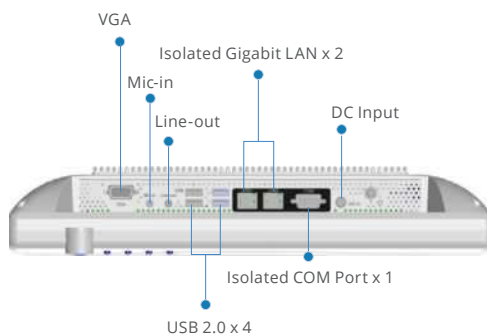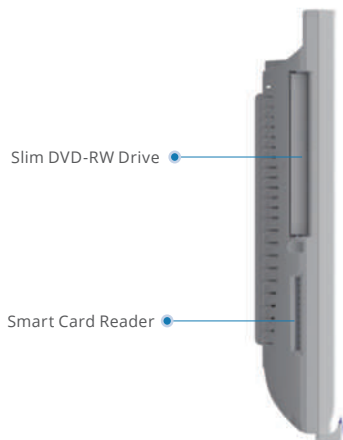

Features

- Intel Celeron J1900 2.42GHz Quad Core Processor
- 17" High Brightness 350 nits SXGA LCD
- Supports DDR3L SODIMM up to 8GB
- 5-wire Resistive Touch Screen
- COM/LAN Medical Isolation
- Trusted Platform Module / Smart Card Reader(optional) / RFID Reader(optional)
- 802.11ac/a/b/g/n Wireless LAN(optional)
- +12V to +24V wide range DC input

Specifications

Main Specifications

Processor	Intel® Celeron J1900 Quad Core 2.42GHz
System Memory	Supports DDR3L SODIMM up to 8GB
OS Support	Windows® 7, Windows® 10, Linux®
Expansion Interface	Mini Card x 1
Storage Disk Drive	mSATA SSD x 1, Slim DVD-RW Driver x 1 (optional)
Security	Trusted Platform Module, Smart Card Reader(optional), RFID Reader(optional)
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down
Wireless Communication	802.11ac/a/b/g/n(optional), Bluetooth 4.0(optional)
Speaker	3W x 2
Power Requirement	DC 12~24V

Display

Size	17" LCD
Resolution	1280 x 1024
Luminance	350 nits
View Angle	170°(H)/160°(V)
Contrast Ratio	1000:1
Back Light Life Time	> 30,000 hours
Touch Screen	5-wire Resistive

I/O


USB	USB 2.0 x 4
Serial Port	Isolated RS-232 x 1
Ethernet	Isolated Gigabit LAN x 2
Video Out	VGA x 1
Audio	Mic-in, Line-out

Mechanical and Environmental

Power Consumption	Full loading: 21 Watts
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	IP65 in the front, IPX1
Dimension	384 x 338 x 69 mm
Package Size	630 x 250 x 640 mm
Gross Weight	9kg (19.84 lb)
Net Weight	5.6kg (12.32lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

17" Fanless J1900 Quad Core Slim Medical Panel PC

Dimension / Unit: mm

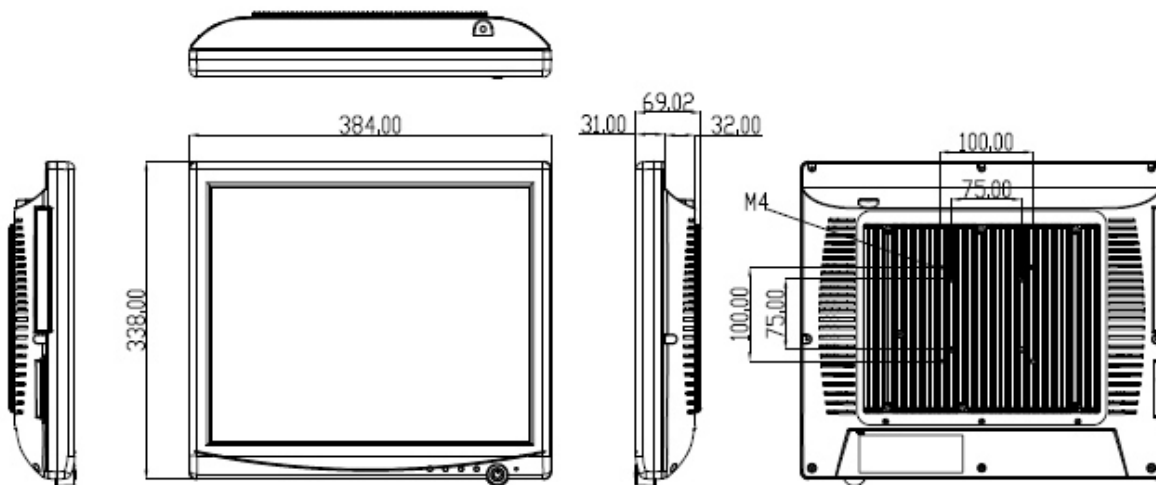

Ordering Information

- » ONYX-1731DTT-A1-1010
Slim Medical Panel PC, 17" LCD, Intel Celeron J1900, 2GB RAM, DC 12~24V, Resistive Touch
- » ONYX-1731DTT-A2-1010
Slim Medical Panel PC, 17" LCD, Intel Celeron J1900, 2GB RAM, DC 12~24V, Resistive Touch, RFID Reader

Optional Accessories

- » 1255300657
Medical Power Adapter, 60W, 24V
- » OPM-T008-A1
Smart Card Reader Kit
- » OPM-T007-A4
Slim Slot-in DVD-RW Drive
- » OPM-C16W-A0
WLAN Kit, IEEE 802.11a/b/g/n + Bluetooth 4.0
- » 968C128G45
128G mSATA SSD


Fanless Slim Panel HIT Solution

ONYX-1531

15.6" Fanless J1900 Quad Core Slim Medical Panel PC




Webcam w/ Mic (optional)

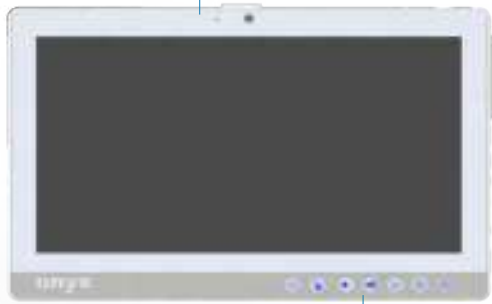

Function Keys



Smart Card Reader (optional)

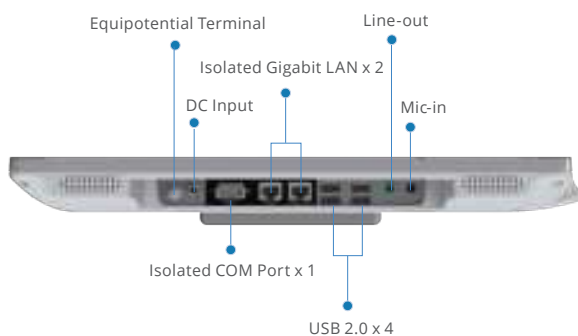

Equipotential Terminal

Line-out

Isolated Gigabit LAN x 2

DC Input

Mic-in

Isolated COM Port x 1

USB 2.0 x 4

Features

- Intel® Celeron J1900 2.42GHz Quad Core Processor
- 15.6" High Brightness 300-nit Full HD LCD
- Supports DDR3L SODIMM up to 8GB
- 5-wire Resistive Touch Screen / Capacitive Multi-Touch Screen
- Easy Cleaning Flat Screen
- 7 Programmable Smart Function Keys
- COM/LAN Medical Isolation
- 2.0M Pixels Camera with Mic (optional)
- Handset Phone (optional)
- Trusted Platform Module / Smart Card Reader(optional) / MSR(optional) / RFID Reader(optional)
- +12V to +24V wide range DC input / Power over Ethernet(optional)

Specifications

Main Specifications

Processor	Intel® Celeron J1900 Quad Core 2.42GHz
System Memory	Supports DDR3L SODIMM up to 8GB
Expansion Interface	Mini Card x 1
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1, mSATA SSD x 1
Security	Trusted Platform Module, Smart Card Reader (optional), MSR (optional), RFID (optional)
Wireless Communication	802.11a/b/g/n(optional), Bluetooth 4.0 (optional)
Speaker	3W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down
Power Requirement	DC 12~24V / Power over Ethernet (optional)
OS Support	Windows 7, Windows10, Linux

Display

Size / Type	15.6" LCD
Max. Resolution	1920 x 1080
Luminance(cd/m2)(TYP)	300 nits
Max. Colors	16.7 M
Viewing Angle	160°(H)/140°(V)
Contrast Ratio	700:1
Back Light Life Time	> 15,000 hours
Touch Screen	5-Wire Resistive / Capacitive Multi-Touch

I/O


USB	USB 2.0 x 4
Serial Port	Isolated RS-232 x 1
Ethernet	Isolated Gigabit LAN x 2
Audio	Mic-in, Line-out

Mechanical and Environmental

Power Consumption	Full loading: 19 Watts
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	IP65 in the front, IPX1
Dimension	398 x 265 x 39mm
Package Size	721 x 224 x 464mm
Gross Weight	6.5 kg (14.33lb)
Net Weight	2.8 kg (6.2lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

15.6" Fanless J1900 Quad Core Slim Medical Panel PC

Dimension / Unit: mm

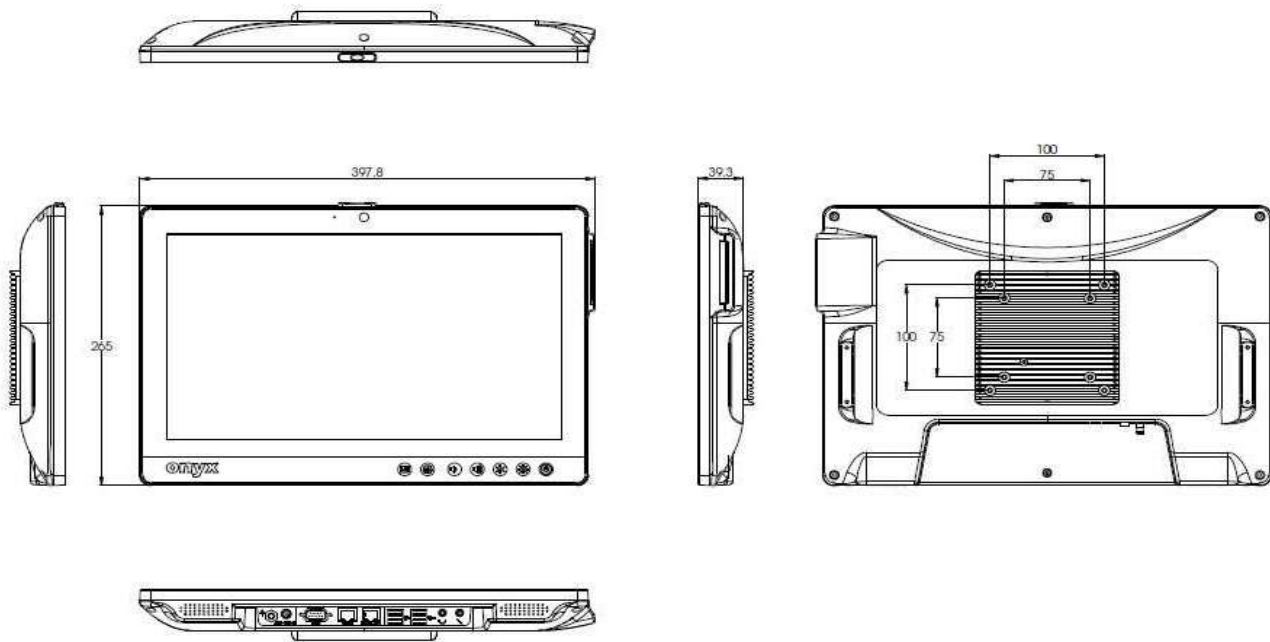

Ordering Information

- » ONYX-1531ET-A1-1010
Slim Medical Panel PC, 15.6" LCD, Intel Celeron J1900, 2GB RAM, DC 12~24V, Resistive Touch
- » ONYX-1531ST-A1-1010
Slim Medical Panel PC, 15.6" LCD, Intel Celeron J1900, 2GB RAM, DC 12~24V, Capacitive Touch


Optional Accessories

- | | |
|--|--|
| <ul style="list-style-type: none"> » 1757306039
Medical Power Adapter, 60W, 12V » OPM-T008-A1
Smart Card Reader Kit » OPM-S02C-A1
Magnetic Stripe Reader Kit » OPM-T011-A1
2M Pixels Camera with Mic Kit » OPM-T018-A5
Handset Kit » OPM-S04R-A1
Smart Card+ RFID Reader Kit | <ul style="list-style-type: none"> » OPM-T018-A6
Handset w/Dual-Keypads, Camera » OPM-C16W-A5
WLAN Kit, IEEE 802.11a/b/g/n + Bluetooth 4.0 » OPM-P30D-A10
Power over Ethernet Kit |
|--|--|

Fanless Slim Panel HIT Solution

ONYX-1222

11.6" Fanless J1900 Quad Core Slim Medical Panel PC

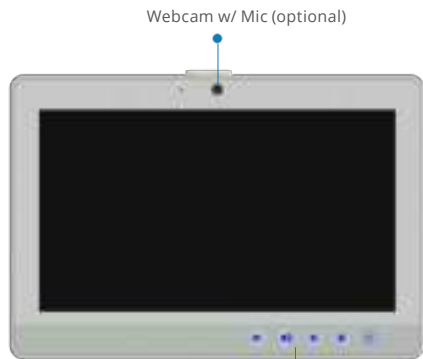


Webcam w/ Mic (optional)

Function Keys Reader



Smart Card Reader (optional)

USB 3.0 x 1

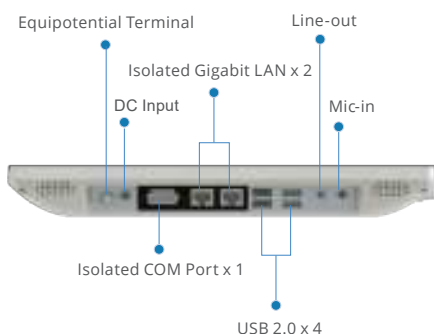

Equipotential Terminal

Line-out

Isolated Gigabit LAN x 2

DC Input

Mic-in

Isolated COM Port x 1

USB 2.0 x 4

Features

- Intel® Celeron J1900 2.42GHz Quad Core Processor
- 11.6" 220-nit WXGA LCD
- Supports DDR3 SODIMM up to 8GB
- 5-wire Resistive Touch Screen / Capacitive Multi-Touch Screen
- Easy Cleaning Flat Screen
- 5 Programmable Smart Function Keys
- COM/LAN Medical Isolation
- High Speed USB 3.0 Port
- 2.0M Pixels Camera with Mic (optional)
- Handset Phone (optional)
- Trusted Platform Module / Smart Card Reader(optional) / MSR(optional) / RFID Reader (optional)
- +12V to +24V wide range DC input / Power over Ethernet(optional)

Specifications

Main Specifications

Processor	Intel® Celeron J1900 Quad Core 2.42GHz
System Memory	Supports DDR3 SODIMM up to 8GB
Expansion Interface	Mini Card x 1
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1, mSATA SSD x 1
Security	Trusted Platform Module, Smart Card Reader (optional), MSR (optional), RFID Reader (optional)
Wireless Communication	802.11a/b/g/n(optional), Bluetooth 4.0 (optional)
Speaker	2W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down
Power Requirement	DC 12~24V / Power over Ethernet(optional)
OS Support	Windows 7, Window 10, Linux

Display

Size / Type	11.6" LCD
Max. Resolution	1366 x 768
Luminance(cd/m2)(TYP)	220 nits
Max. Colors	16.7 M
Viewing Angle	170°(H)/170°(V)
Contrast Ratio	800:1
Back Light Life Time	> 15,000 hours
Touch Screen	5-Wire Resistive / Capacitive Multi-Touch

I/O


USB	USB 2.0 x 4, USB 3.0 x 1 (in side I/O)
Serial Port	Isolated RS-232 x 1
Ethernet	Isolated Gigabit LAN x 2
Audio	Mic-in, Line-out

Mechanical and Environmental

Power Consumption	Full loading: 22 Watts
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	IP65 in the front, IPX1
Dimension	300 x 208 x 39 mm
Package Size	540 x 230 x 370 mm
Gross Weight	4kg (8.82lb)
Net Weight	1.5kg (3.3lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

11.6" Fanless J1900 Quad Core Slim Medical Panel PC

Dimension / Unit: mm

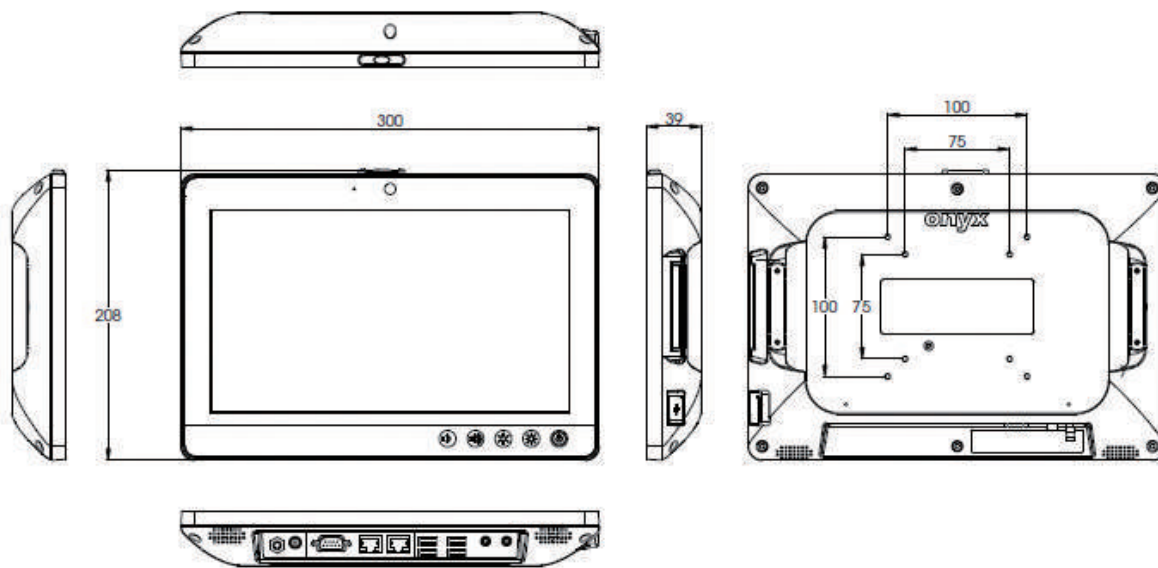

Ordering Information

- » ONYX-1222ET-A1-1110
Slim Medical Panel PC, 11.6" LCD, Intel Celeron J1900, 2GB RAM, DC 12~24V, Resistive Touch
- » ONYX-1222ST-A1-1110
Slim Medical Panel PC, 11.6" LCD, Intel Celeron J1900, 2GB RAM, DC 12~24V, Capacitive Touch



Optional Accessories

- | | |
|---|---|
| <ul style="list-style-type: none"> » 1757306039
Medical Power Adapter, 60W, 12V » OPM-T010-A1
Smart Card Reader Kit » OPM-S02C-A2
Magnetic Stripe Reader Kit » OPM-T011-A1
2M Pixels Camera with Mic Kit » OPM-T018-A3
Handset Kit | <ul style="list-style-type: none"> » OPM-T018-A4
Handset w/Dual-Keypads, Camera » OPM-C16W-A4
WLAN Kit, IEEE 802.11a/b/g/n + Bluetooth 4.0LE/ 3.0HS / 2.1 EDR » OPM-P30D-A10
Power over Ethernet kit |
|---|---|

Fanless Slim Panel HIT Solution

ONYX-1022

10.1" Fanless J1900 Quad Core Slim Medical Panel PC

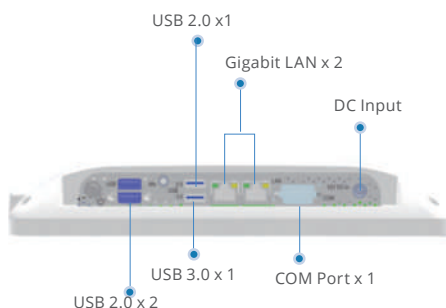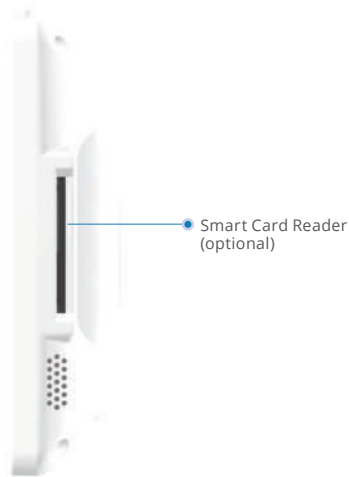

Features

- Intel® Celeron J1900 2.42GHz Quad Core Processor
- 10.1" 1280x800 LCD
- Supports DDR3L SODIMM up to 8GB
- Capacitive Multi-Touch Screen/ 5-Wire Resistive Touch Screen
- Easy Cleaning Flat Screen
- Two Gigabit Ethernet
- One High Speed USB 3.0 Port
- Trusted Platform Module / Smart Card Reader(optional) / RFID Reader(optional)
- 2.0M Pixels Camera with Mic(optional)
- +12V DC input

Specifications

Main Specifications

Processor	Intel® Celeron J1900 Quad Core 2.42GHz
System Memory	Supports DDR3L SODIMM up to 8GB
Expansion Interface	Mini Card x 1
Storage Disk Drive	Half Size mSATA SSD x 1
Security	Trusted Platform Module, Smart Card Reader(optional), RFID Reader(optional)
Wireless Communication	802.11ac/a/b/g/n(optional), Bluetooth 4.0(optional)
Speaker	2W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down
Power Requirement	DC 12V
OS Support	Windows 7, Windows 10, Linux

Display

Size / Type	10.1" LCD
Max. Resolution	1280 x 800
Luminance(cd/m2)(TYP)	300 nits
Viewing Angle	170°(H)/170°(V)
Contrast Ratio	1300:1
Back Light Life Time	25,000 hours
Touch Screen	Capacitive Multi-Touch/ 5-Wire Resistive Touch

I/O


USB	USB 3.0 x 1, USB 2.0 x 3
Serial Port	RS-232 x 1
Ethernet	Gigabit LAN x 2

Mechanical and Environmental

Power Consumption	Full loading: 20 Watts
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	IP65 in the front, IPX1
Dimension	262 x 191 x 45 mm
Package Size	402 x 190 x 335 mm
Gross Weight	3.7kg (8.2lb)
Net Weight	1.2kg (2.6lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

10.1" Fanless J1900 Quad Core Slim Medical Panel PC

Dimension / Unit: mm

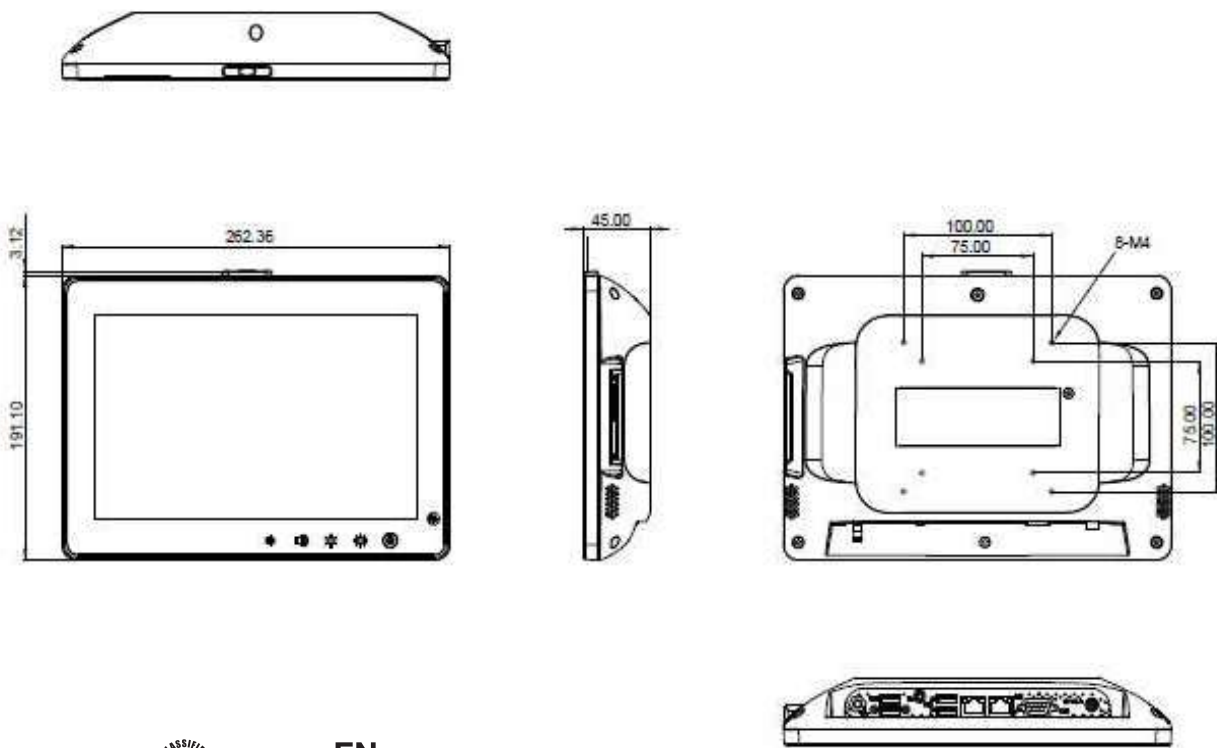

Ordering Information

- » ONYX-1022ST-A1-1110
Slim Medical Panel PC, 10.1" 1280x800 LCD, Intel Celeron J1900, 2GB RAM, DC 12V, Capacitive Touch
- » ONYX-1022ET-A1-1110
Slim Medical Panel PC, 10.1" 1280x800 LCD, Intel Celeron J1900, 2GB RAM, DC 12V, Resistive Touch

Optional Accessories

- » 1757306039
Medical Power Adapter, 60W, 12V
- » OPM-C16W-A8
WLAN Kit, IEEE 802.11a/b/g/n + Bluetooth 4.0
- » OPM-T010-A2
Smart Card Reader Kit
- » OPM-T011-A2
2M Pixels Camera with Mic Kit

Panel PC Accessory Selection

OPM-H02S

Desktop Stand



Features

- » Apply to 10"~22" Slim Medical Panel PC, Medical Display.
- » Spinning around high and mighty; able to bear 5kg to 12kg.
- » Providing 2 mounting space in coordination with VESA standard: 75mm x 75mm and 100mm x100mm

Ordering Information

- » TF-OPM-H02S-A0
Desktop Stand, Black Color, VESA 75/100, 230mm Height
- » TF-OPM-H02S-A1
Desktop Stand, Black Color, VESA 75/100, 280mm Height

OPM-H01S

Desktop Stand



Features

- » Apply to 15" ~ 24" Medical Station, Slim Medical Panel PC, Medical Display.
- » Spinning around high and mighty; able to bear 5 kg to 15kg.
- » Providing 2 mounting space in coordination with VESA standard:75mm x 75mm and 100mm x100mm
- » The angle of view was designed adjustable for clear vision.
- » Flexible angle create brand-new atmosphere of monitors.
- » Up-to-date choice in the multimedia era.
- » Show yourself and break the limit of environment.
- » Regulate as you want to make more space.

Ordering Information

- » TF-OPM-H01S
Desktop Stand, Black Color, VESA 75/100, 265mm to 330mm Height

Panel PC Accessory Selection

OPM-H10A Gas Spring Arm




Features

- » Clamp type can fit all kind of mobile car.
- » Weight capacity : 2~8KG (4.4~17.6lb)
- » Clockwise / counterclockwise rotation

Ordering Information

- » OPM-H10A-00
VESA 75/100 Clamp type spring arm (Silver)

OPM-H12A VESA Mount Power Adapter Holder

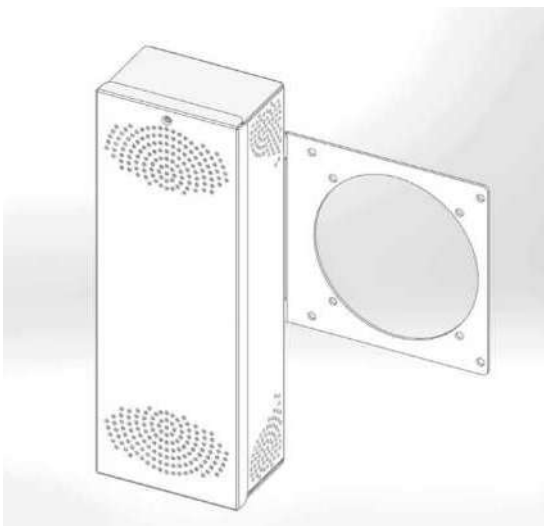

Features

- » Design for 1255301202 & 1255301204 with 120W
- » Apply to 15" to 24" Medical Station, Slim Medical Panel PC
- » Providing 2 mounting spaces in coordination with VESA standard: 75mm x 75mm and 100mm x 100mm

Ordering Information

- » OPM-H12A-A1
VESA mount power adapter holder

Medical AIO Solution

Medical AIO is a highly cost effective solution. Intel Core i7 processor, up to 32GB DDR4 and capacitive multi-touch screen enhance the efficiency of hospital applications. Fanless design keeps environment quiet and reduces the effort in cleaning. With one PCI Express[x1] or [x4] slot, any standard PCI Express[x1] or [x4] card such as isolated RS-232 card and video capture card can be installed to enhance capability.



Key Features:

- » 19"/22"/24"LCD with resistive touch or capacitive multi-touch
- » Trusted Platform Module , RFID Reader and Smart Card Reader for Security Enhancement
- » One PCI Express Slot
- » +12V DC input
- » Fanless Design for Quiet and Easy Maintenance
- » Reading Light



+ Intel® Core Platform for Critical Applications

Medical AIO offer ultra high performance Intel® Quad Core processor.



+ Super 3.0 for USB, SATA and PCI-e

Still looking for a faster solution to upload or download medical records?! Zeus comes with latest high speed I/O design (USB3.0, SATA3.0, PCI-E3.0). Super 3.0 gives ten times data rate than before.



+ Triple Isolation Protection to Patient

Medical isolation rating is 4kV rms (IEC 60601-1), which is crucial to protect patients, operators and medical equipment from harmful surges or spikes in the electrical signal. Medical AIO offers optional COM port, USB port isolation. We set the highest standard for patient and medical uses.



+ Quiet, Clean & Easy to Maintain

Slim Medical Panel PCs utilize a large fanless heatsink on the back cover to efficiently dissipate heat generated from the processor and chipset. The Fanless cooling design keeps the environment quiet, clean and lowers maintenance efforts.



+ Dual Antennas with Best WLAN performance

With two antennas built into the Slim Medical Panel PCs, massive medical records and PACS images can be transferred through IEEE 802.11b/g/n wireless LAN up to 150Mbps/sec.



Medical AIO Solution

MATE-2405

24" Fanless Core i7 Medical AIO



LCD on/off


Reading Light

LCD Brightness

Speaker Volume

Touch Screen on/off


Power on / off

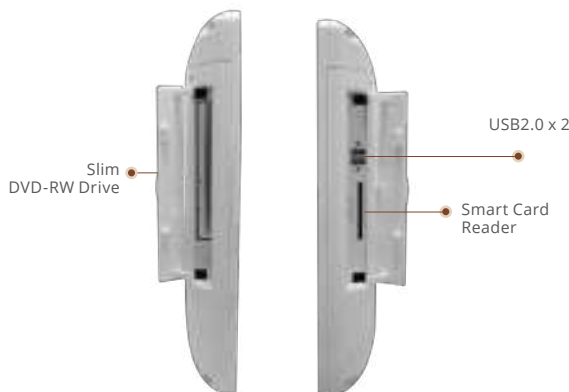

Slim
DVD-RW Drive

USB2.0 x 2

Smart Card
Reader

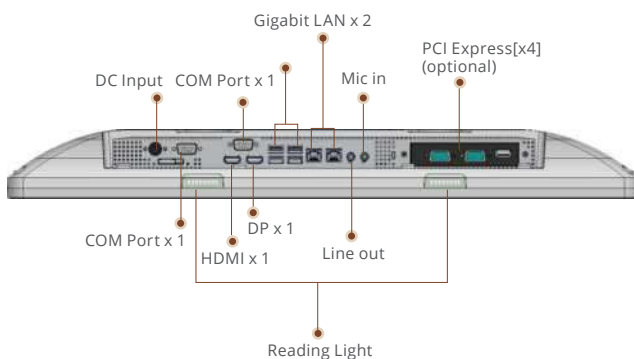

Gigabit LAN x 2

DC Input

COM Port x 1

Mic in

PCI Express[x4]
(optional)

COM Port x 1

DP x 1

HDMI x 1

Line out

Reading Light

Features

- Intel® 8th/9th Generation Core™ i7 / i5 / i3 Processor
- Intel® H310 Chipset
- Supports Dual Channel DDR4 2666 SODIMM up to 32GB
- 24" Full HD High Contrast MVA LCD
- 5-Wire Resistive Touch Screen / Capacitive Multi-Touch Screen
- Two Gigabit Ethernet
- High Speed USB 3.0 Ports
- RS-232 x 2
- PCI-Express x [4] x 1 (optional)
- +12V DC Input

Specifications

Main Specifications

Processor	Intel® 8th/ 9th Generation Core i7 / i5 / i3 Processor
System Memory	Supports Dual Channel DDR4 2666 SODIMM up to 32GB
Chipset	Intel® H310
OS Support	Windows® 10, Linux®
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1 Slim DVD-RW Drive x 1 (optional)
Security	Trusted Platform Module, RFID Reader (optional) Smart Card Reader x 1 (optional)
Wireless Communication	802.11 ac/a/b/g/n(optional), Bluetooth 4.1 / 5 (optional)
Speaker	5W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down LCD On/Off, Touch Screen On/Off, Reading Light On/Off
Power Requirement	DC 12V

Display

Size	24" LCD
Resolution	1920 x 1080
Luminance	250 nits
View Angle	178°(H)/178°(V)
Contrast Ratio	3000:1
Back Light Life Time	30,000 Hours
Touch Screen	5-Wire Resistive / Capacitive Multi-Touch

I/O


USB	USB 3.0 x 4, USB 2.0 x 2
Serial Port	RS-232 x 2
Ethernet	1.5KV Isolated Gigabit LAN x 2
Video Out	Display Port x1, HDMI x 1 (Supports resolution up to 3840 x 2160)
Audio	Mic-in, Line-out

Mechanical and Environmental

Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting VESA	75/100 mm
Degree of Protection	IP65 in the front ; IP54 in the back
Dimension	600 x 415 x 65mm
Package Size	790 x 220 x 550mm
Gross Weight	14 kg (30.86 lb)
Net Weight	9.2 kg(20.28 lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

24" Fanless Core i7 Medical AIO

Dimension / Unit: mm

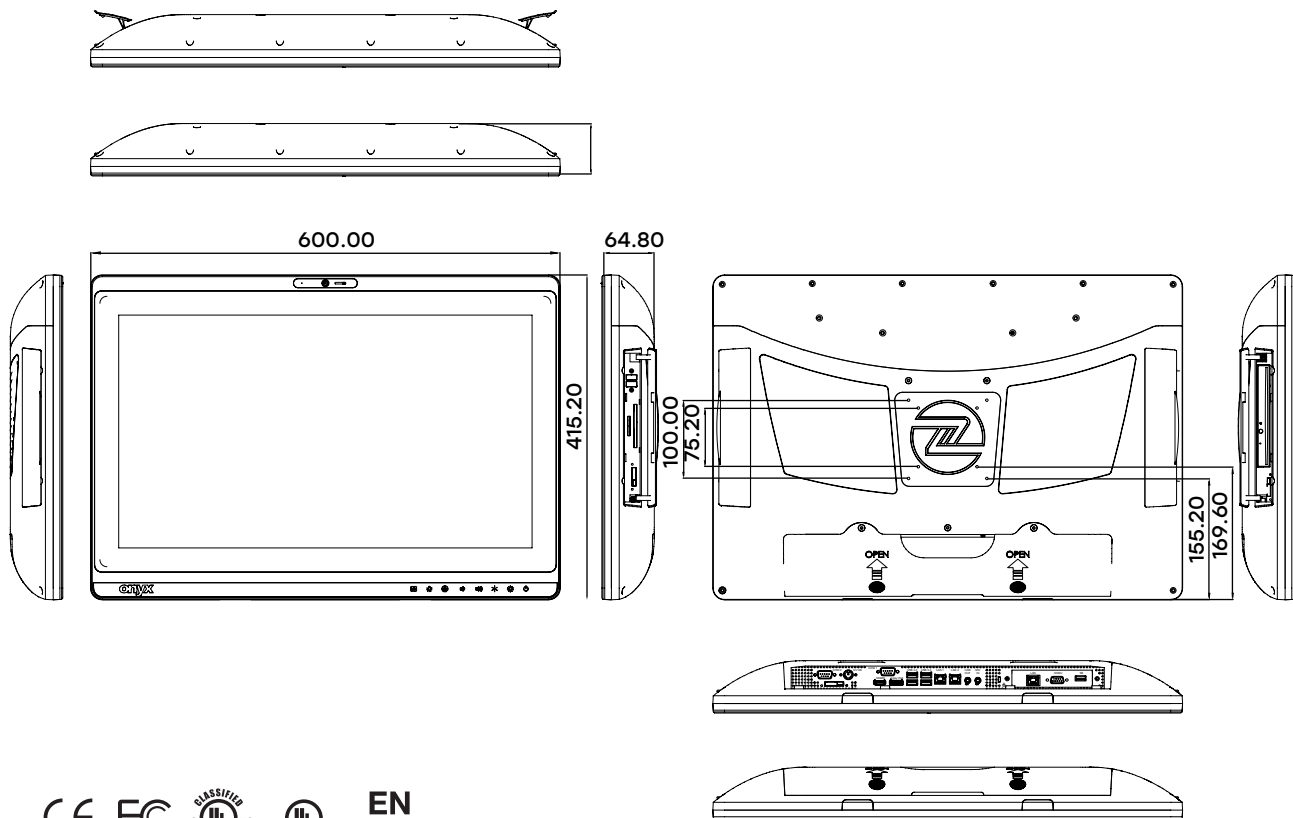

Ordering Information

- | | |
|--|---|
| » MATE-2405-P1-A1-0010
Medical Panel PC, 24" LCD, i7-8700T, DC 12V, Capacitive Touch | » MATE-2405-R1-A1-0010
Medical Panel PC, 24" LCD, i7-8700T, DC 12V, Resistive Touch |
| » MATE-2405-P2-A1-0010
Medical Panel PC, 24" LCD, i7-9700TE, DC 12V, Capacitive Touch | » MATE-2405-R2-A1-0010
Medical Panel PC, 24" LCD, i7-9700TE, DC 12V, Resistive Touch |
| » MATE-2405-P3-A1-0010
Medical Panel PC, 24" LCD, i5-8500T, DC 12V, Capacitive Touch | » MATE-2405-R3-A1-0010
Medical Panel PC, 24" LCD, i5-8500T, DC 12V, Resistive Touch |
| » MATE-2405-P4-A1-0010
Medical Panel PC, 24" LCD, i5-9500TE, DC 12V, Capacitive Touch | » MATE-2405-R4-A1-0010
Medical Panel PC, 24" LCD, i5-9500TE, DC 12V, Resistive Touch |




Optional Accessories

- | | |
|--|--|
| » 1255301205
Medical Power Adapter, 120W, 12V | » OPM-T013-A2
Slim Slot-in DVD-RW Drive |
| » OPM-R03X-A1
PCI Express[x1] Riser Kit | » OPM-C02C-A1
Two Isolated RS-232 & One Isolated USB 2.0 PCIe Card |
| » OPM-R04X-A1
PCI Express[x4] Riser Kit | » OPM-C02C-A2
Two Isolated RS-232 PCIe Card |
| » OPM-C12W-A6
WLAN Kit, IEEE 802.11a/b/g/n/ac + Bluetooth 4.1 | » OPM-C03C-A1
One Isolated Gigabit LAN & One Isolated RS-232 & One Isolated USB 2.0 PCIe Card |
| » OPM-C15W-A6
WLAN Kit, IEEE 802.11a/b/g/n/ac + Bluetooth 5 | » OPM-T017-A6
Hot Swap Rack w/Lock Kit for 2.5" HDD/SSD |
| » OPM-T006-A2
Smart Card Reader Kit | |

Medical AIO Solution

MATE-2205

22" Fanless Core i7 Medical AIO

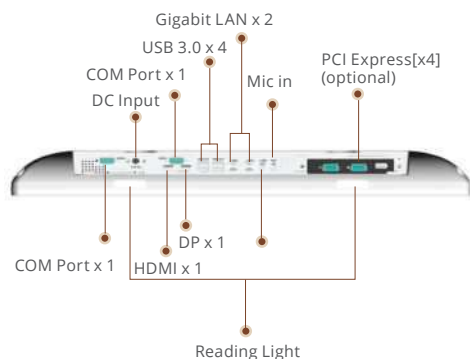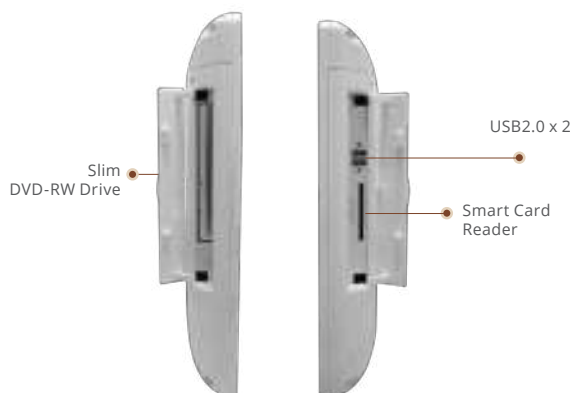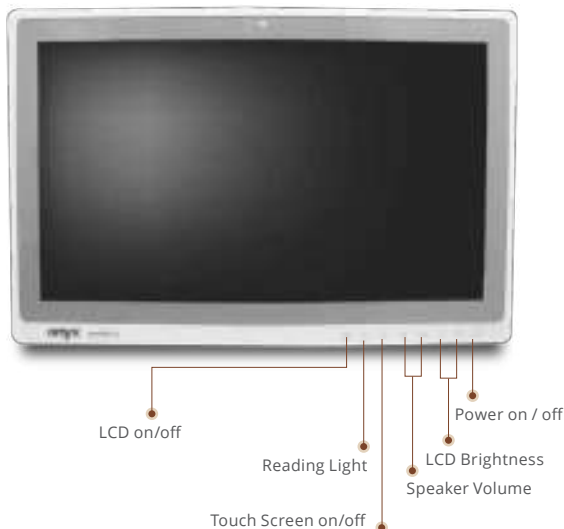

Features

- Intel® 8th/9th Generation Core™ i7/ i5 / i3 Processor
- Intel® H310 Chipset
- Supports Dual Channel DDR4 2666 SODIMM up to 32GB
- 22" Full HD High Contrast MVA LCD
- 5-Wire Resistive Touch Screen / Capacitive Multi-Touch Screen
- Two Gigabit Ethernet
- High Speed USB 3.0 Ports
- RS-232 x 2
- PCI-Express [x4] x 1 (optional)
- +12V DC Input

Specifications

Main Specifications

Processor	Intel® 8th/9th Generation Core i7 / i5 / i3 Processor
System Memory	Supports Dual Channel DDR4 2666 SODIMM up to 32GB
Chipset	Intel® H310
OS Support	Windows® 10, Linux®
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1 Slim DVD-RW Drive x 1 (optional)
Security	Trusted Platform Module, RFID Reader (optional) Smart Card Reader x 1 (optional)
Wireless Communication	802.11 ac/a/b/g/n(optional), Bluetooth 4.1 / 5(optional)
Speaker	5W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down LCD On/Off, Touch Screen On/Off, Reading Light On/Off
Power Requirement	DC 12V

Display

Size / Type	22" MVA LCD
Max. Resolution	1920 x 1080
Luminance(cd/m2)(TYP)	250 nits
Viewing Angle	178°(H)/178°(V)
Contrast Ratio	3000:1
Back Light Life Time	30,000 Hours
Touch Screen	5-Wire Resistive / Capacitive Multi-Touch

I/O


USB	USB 3.0 x 4, USB 2.0 x 2
Serial Port	RS-232 x 2
Ethernet	1.5KV Isolated Gigabit LAN x 2
Video Out	Display Port x1, HDMI x 1 (Supports resolution up to 3840 x 2160)
Audio	Mic-in, Line-out

Mechanical and Environmental

Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting VESA	75/100 mm
Degree of Protection	IP65 in the front ; IP54 in the back
Dimension	546 x 352 x 66mm
Package Size	750 x 220 x 490 mm
Gross Weight	12 kg (26.45 lb)
Net Weight	8 kg (17.63 lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

22" Fanless Core i7 Medical AIO

Dimension / Unit: mm

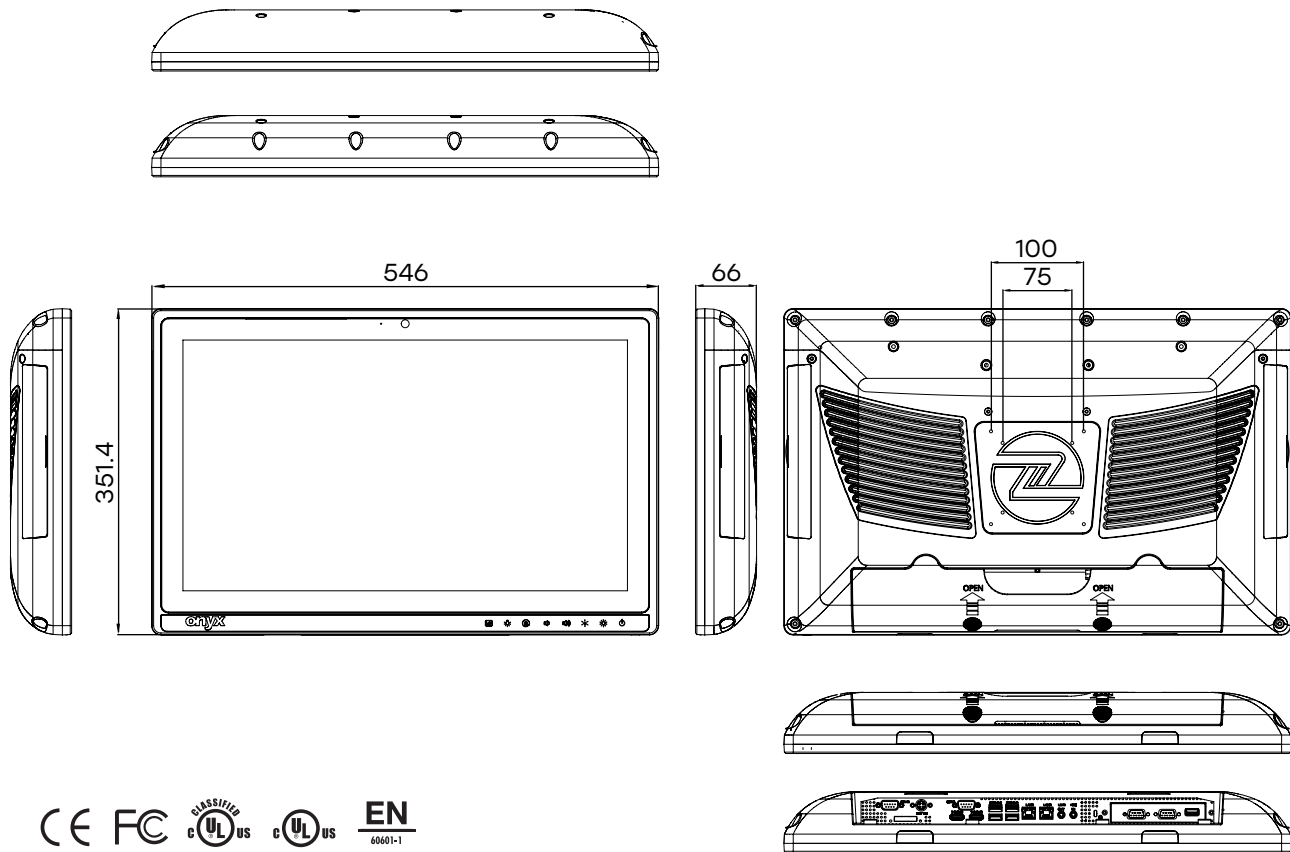

Ordering Information

- | | |
|--|---|
| » MATE-2205-P1-A1-0010
Medical Panel PC, 22" LCD, i7-8700T, DC 12V, Capacitive Touch | » MATE-2205-R1-A1-0010
Medical Panel PC, 22" LCD, i7-8700T, DC 12V, Resistive Touch |
| » MATE-2205-P2-A1-0010
Medical Panel PC, 22" LCD, i7-9700TE, DC 12V, Capacitive Touch | » MATE-2205-R2-A1-0010
Medical Panel PC, 22" LCD, i7-9700TE, DC 12V, Resistive Touch |
| » MATE-2205-P3-A1-0010
Medical Panel PC, 22" LCD, i5-8500T, DC 12V, Capacitive Touch | » MATE-2205-R3-A1-0010
Medical Panel PC, 22" LCD, i5-8500T, DC 12V, Resistive Touch |
| » MATE-2205-P4-A1-0010
Medical Panel PC, 22" LCD, i5-9500TE, DC 12V, Capacitive Touch | » MATE-2205-R4-A1-0010
Medical Panel PC, 22" LCD, i5-9500TE, DC 12V, Resistive Touch |


Optional Accessories

- | | |
|--|--|
| » 1255301205
Medical Power Adapter, 120W, 12V | » OPM-T013-A1
Slim Slot-in DVD-RW Drive |
| » OPM-R03X-A1
PCI Express[x1] Riser Kit | » OPM-C03C-A1
One Isolated Gigabit LAN & One Isolated RS-232 & One Isolated USB 2.0 PCIe Card |
| » OPM-R04X-A1
PCI Express[x4] Riser Kit | » OPM-T017-A2
Hot Swap Rack w/Lock Kit for 2.5" HDD/SSD |
| » OPM-C12W-A6
WLAN Kit, IEEE 802.11a/b/g/n/ac + Bluetooth 4.1 | |
| » OPM-C15W-A6
WLAN Kit, IEEE 802.11a/b/g/n/ac + Bluetooth 5 | |
| » OPM-T006-A2
Smart Card Reader Kit | |



Medical AIO Solution

MATE-2204

22" Fanless AMD Ryzen Embedded V1000 Medical AIO

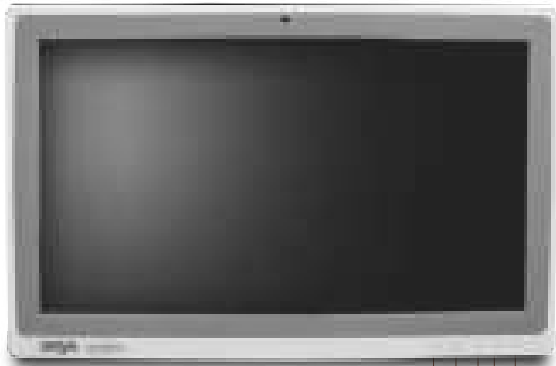

Reading Light
Power on / off
LCD Brightness
Touch Screen on/off

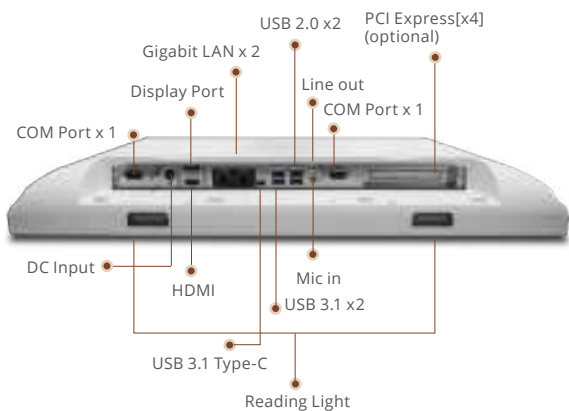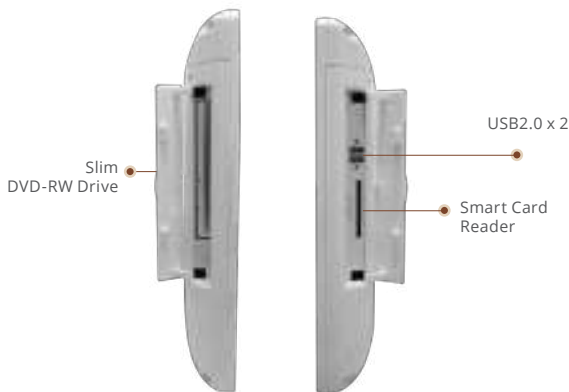

Features

- AMD Ryzen Embedded V1605B Quad Core Processor
- AMD Vega GPU with 8 Compute Units
- Supports Dual Channel ECC/Non-ECC DDR4 2400 SODIMM up to 32GB
- 22" FHD High Contrast MVA LCD
- Capacitive Multi-Touch Screen/5-Wire Resistive Touch Screen
- Supports Three Display Outputs: HDMI 2.0 + DisplayPort 1.4 + USB 3.1 Type-C
- 2 x Gigabit Ethernet
- 3 x High Speed USB 3.1 Ports ,
- 2 x RS-232
- 1 x PCI Express[x4] Slot (optional)
- +12V DC Input

Specifications

Main Specifications

Processor	AMD Ryzen Embedded V1605B Quad Core Processor
System Memory	Dual Channel ECC/Non-ECC DDR4 2400 SODIMM up to 32GB
Graphics	AMD Vega GPU with 8 Compute Units
OS Support	Windows® 10, Linux®
Storage Disk Drive	2.5" SATA SSD/HDD x1, M.2 2280/2242 SATA SSD x1, Slim DVD-RW Drive x1(optional)
Security	fTPM2.0, RFID Reader(optional), Smart Card Reader(optional)
Wireless Communication	802.11ac/a/b/g/n(optional), Bluetooth 4.1/4.2/5.0(optional)
Speaker	5W x 2
Function Key	LCD Brightness Up/Down, Touch Screen On/Off, Reading Light On/Off
Power Requirement	DC 12V

Display

Size / Type	22" MVA LCD
Max. Resolution	1920 x 1080
Luminance(cd/m2)(TYP)	250 nits
Viewing Angle	178° (H)/178° (V)
Contrast Ratio	3000:1
Back Light Life Time	30,000 Hours
Touch Screen	5-Wire Resistive / Capacitive Multi-Touch

I/O


USB	USB 3.1 Type-A x2, USB 3.1 Type-C x1, USB 2.0 x2
Serial Port	RS-232 x2
Ethernet	1.5KV Isolated Gigabit LAN x2
Video Out	HDMI 2.0 x1, DisplayPort 1.4 x1, USB 3.1 Type-C x1 (Supports resolution up to 3840x2160)
Audio	Line-out, Mic

Mechanical and Environmental

Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting VESA	75/100 mm
Degree of Protection	IP65 in the front ; IP54 in the back
Dimension	546 x 352 x 66mm
Package Size	750 x 220 x 490 mm
Gross Weight	12 kg (26.45 lb)
Net Weight	8 kg (17.63 lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

22" Fanless AMD Ryzen Embedded V1000 Medical AIO

Dimension / Unit: mm

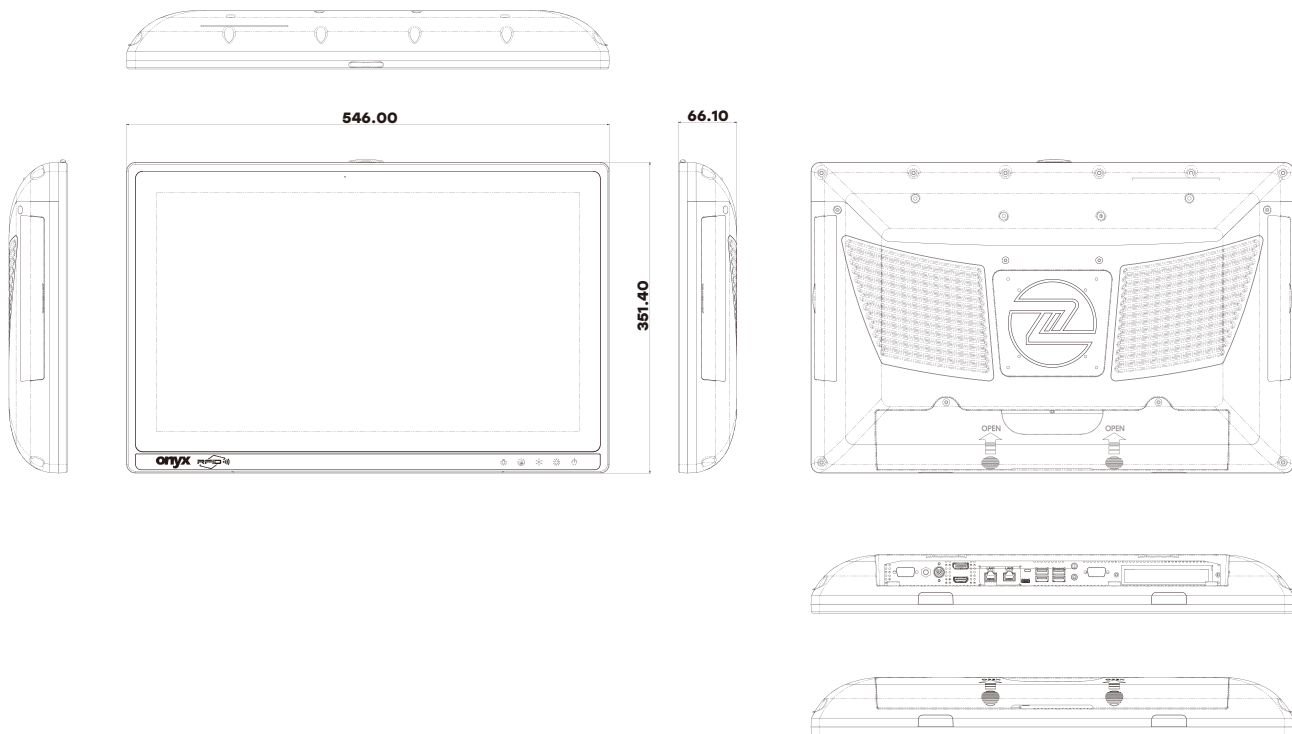

Ordering Information

- » MATE-2204-P1-A1-0010
Medical Panel PC, 22" LCD, V1605B, DC 12V, Capacitive Touch
- » MATE-2204-R1-A1-0010
Medical Panel PC, 22" LCD, V1605B, DC 12V, Resistive Touch



Optional Accessories

- | | |
|---|---|
| <ul style="list-style-type: none"> » 1255301205
Medical Power Adapter, 120W, 12V » OPM-R03X-A1
PCI Express [x1] Riser Kit » OPM-R04X-A1
PCI Express [x4] Riser Kit » OPM-C12W-A6
WLAN Kit, IEEE 802.11a/b/g/n/ac + Bluetooth 4.1 » OPM-C15W-A6
WLAN Kit, IEEE 802.11a/b/g/n/ac + Bluetooth 5 » OPM-T006-A2
Smart Card Reader Kit » OPM-T013-A1
Slim Slot-in DVD-RW Drive | <ul style="list-style-type: none"> » OPM-C02C-A1
Two Isolated RS-232 & One Isolated USB 2.0 PCIe Card » OPM-C02C-A2
Two Isolated RS-232 PCIe Card » OPM-C03C-A1
One Isolated Gigabit LAN & One Isolated RS-232 & One Isolated USB 2.0 PCIe Card » OPM-T017-A2
Hot Swap Rack w/Lock Kit for 2.5" HDD/SSD |
|---|---|

Medical AIO Solution

MATE-1903

19" Fanless Core i7 Medical AIO

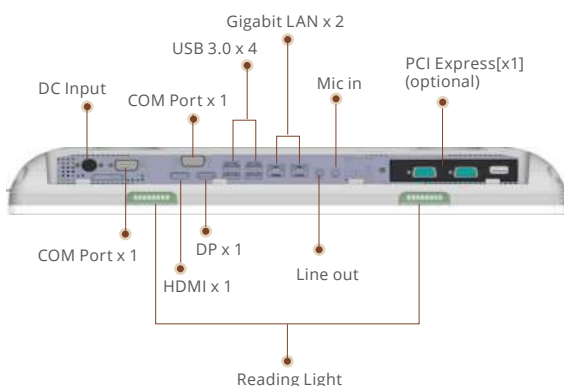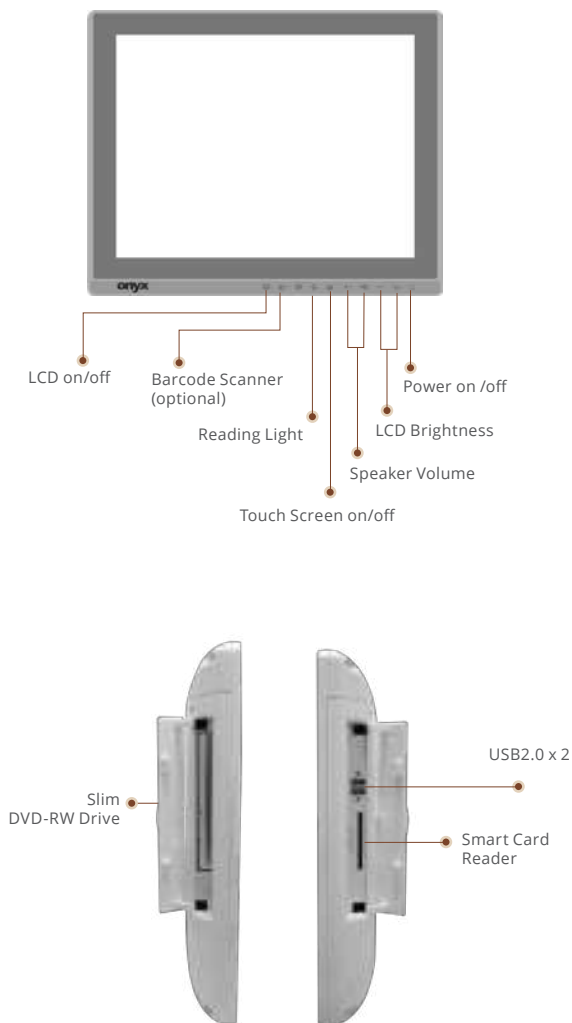

Features

- Intel® 6th Generation Core™ i7/ i5 / i3 Processor
- Intel® H110 Chipset
- Supports Dual Channel DDR4 2133 SODIMM up to 32GB
- 19" SXGA LCD with LED Backlight
- 5-Wire Resistive Touch Screen / Capacitive Multi-Touch Screen
- Two Gigabit Ethernet
- High Speed USB 3.0 Ports
- RS-232 x 2
- PCI-Express x [1] x 1 (optional)
- +12V DC Input

Specifications

Main Specifications

Processor	Intel® 6th Generation Core i7 / i5 / i3 Processor
System Memory	Supports Dual Channel DDR4 2133 SODIMM up to 32GB
Chipset	Intel® H110
OS Support	Windows® 7, Windows® 10, Linux®
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1 Slim DVD-RW Drive x 1 (optional)
Security	Trusted Platform Module, RFID Reader (optional) Smart Card Reader x 1 (optional)
Wireless Communication	802.11ac/a/b/g/n(optional), Bluetooth 3.0HS & 4.0 (optional)
Speaker	5W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down LCD On/Off, Touch Screen On/Off, Reading Light On/Off
Power Requirement	DC 12V

Display

Size / Type	19" TN LCD
Max. Resolution	1280 x 1024
Luminance(cd/m2)(TYP)	250 nits
Viewing Angle	170°(H)/160°(V)
Contrast Ratio	1000:1
Back Light Life Time	30,000 Hours
Touch Screen	5-Wire Resistive / Capacitive Multi-Touch Screen

I/O


USB	USB 3.0 x 4, USB 2.0 x 2
Serial Port	RS-232 x 2
Ethernet	1.5KV Isolated Gigabit LAN x 2
Video Out	Display Port x1, HDMI x 1 (Supports resolution up to 3840 x 2160)
Audio	Mic-in, Line-out

Mechanical and Environmental

Operating Temperature	0°C ~ 35°C(32°F ~ 95°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting VESA	75/100 mm
Degree of Protection	IP65 in the front ; IP54 in the back
Dimension	450 x 388 x 66 mm
Package Size	640 x 220 x 520mm
Gross Weight	11 kg (24.25 lb)
Net Weight	7.5kg (16.53lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

19" Fanless i7 Medical AIO

Dimension / Unit: mm

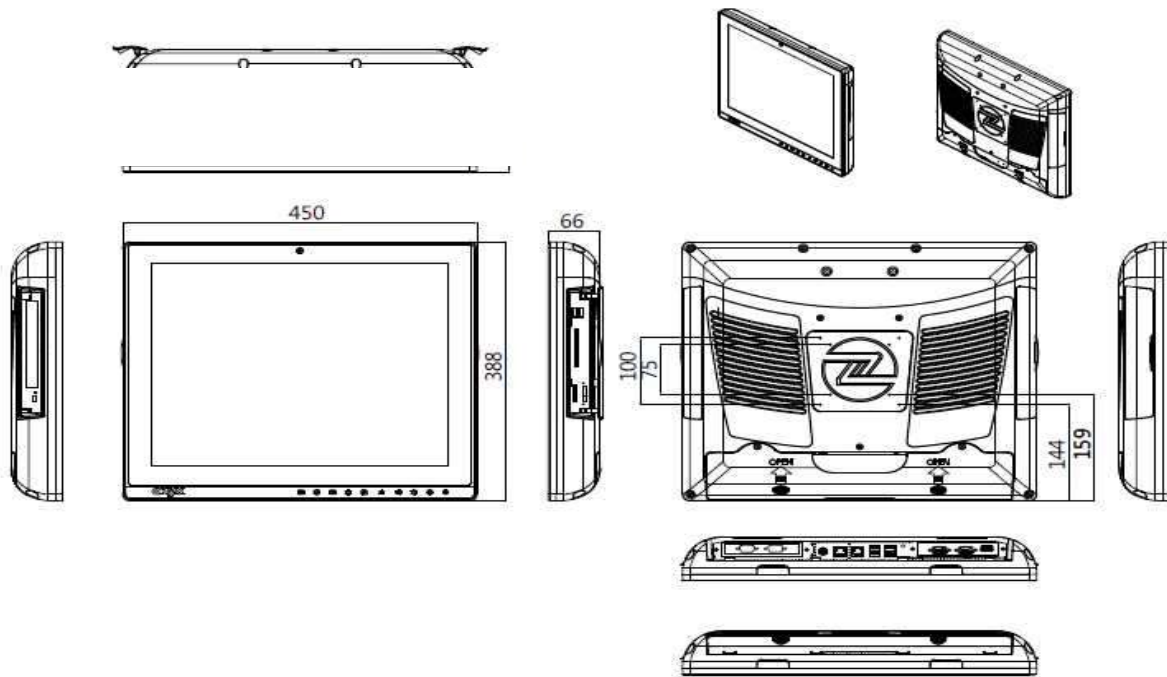

Ordering Information

- | | |
|--|---|
| <ul style="list-style-type: none"> » MATE-1903ST-A1-1010
Medical Panel PC, 19" LCD, i7, 4GB RAM, DC 12V, Capacitive Touch » MATE-1903ST-A2-1010
Medical Panel PC, 19" LCD, i5, 4GB RAM, DC 12V, Capacitive Touch » MATE-1903ST-A3-1010
Medical Panel PC, 19" LCD, i3, 4GB RAM, DC 12V, Capacitive Touch | <ul style="list-style-type: none"> » MATE-1903ET-A1-1010
Medical Panel PC, 19" LCD, i7, 4GB RAM, DC 12V, Resistive Touch » MATE-1903ET-A2-1010
Medical Panel PC, 19" LCD, i5, 4GB RAM, DC 12V, Resistive Touch » MATE-1903ET-A3-1010
Medical Panel PC, 19" LCD, i3, 4GB RAM, DC 12V, Resistive Touch |
|--|---|

Optional Accessories

- | | |
|---|---|
| <ul style="list-style-type: none"> » 1255301204
Medical Power Adapter, 120W, 12V » OPM-T006-A2
Smart Card Reader Kit » OPM-T013-A2
Slim Slot-in DVD-RW Drive » OPM-C16W-A6
WLAN Kit, IEEE 802.11a/b/g/n + Bluetooth 4.0 » OPM-R03X-A1
PCI Express[x1] Riser Kit » OPM-S07R-A1
RFID Reader Kit | <ul style="list-style-type: none"> » OPM-C02C-A1
Two Isolated RS-232 & One Isolated USB 2.0 PCIe Card » OPM-C02C-A2
Two Isolated RS-232 PCIe Card » OPM-C03C-A1
One Isolated Gigabit LAN & One Isolated RS-232 & One Isolated USB 2.0 PCIe Card » OPM-T017-A4
Hot Swap Rack w/Lock Kit for 2.5" HDD/SSD |
|---|---|

Medical Display Series Solution

Worldwide Medical Safety Standard Approval

All display meets the strictest medical, safety and EMC emissions standards including CE/FCC Class B Passed 18, EN 60601-1:2006



Key Features

- » 15"~27" Medical Grade Display
- » Touch function support
- » Low power consumption with LED back light panel



Small to Large LCD Display Choices

The Onyx slim display offers many LCD sizes to fulfill various requirements. 15" (1024 x768), 15.6" (1920x1080), 21.5" (1920x1080), 23.8" (1920x1080), 27" (1920 X 1080)



Frabjous Touch experience

PCT multi-touch touchscreen solution can also be operated with gloved fingers and bare fingers alike.



Green and Low power consumption

LED(light emitting diodes) backlighting technology, which offer the advantages over CCFL LCDs of reduced power consumption, better contrast, brightness and color range.



Long term product life time support

ONYX provides stable and long term support to our customers. Customers could focus on business promotion and product development.



Flexibility for customization request to medical equipment



Still couldn't find the perfect match to your request? Don't worry about it. ONYX could base your demand to provide the best solution.



Medical Display Series Solution

MEDDP-627

27" Fanless Slim Medical LCD Monitor

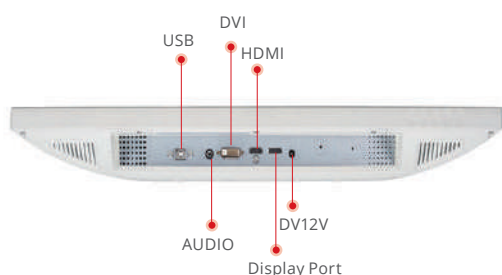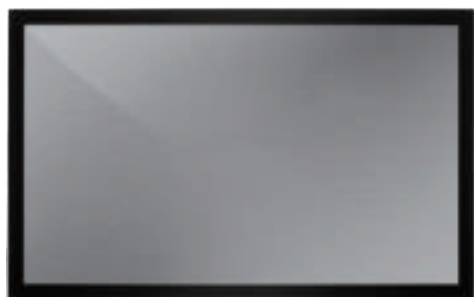

Features

- 27" LCD Panel with LED Backlight
- Compact and Terse Design
- DVIx 1, HDMI x 1, DPx1
- Wide view angle 178°(H)/178°(V)
- True Flat Screen with PCT Touch
- Invisible OSD Design
- Low Power Consumption
- DICOM as optional

Specifications

Display

Size	27"
Resolution	Full HD 1920 x 1080
Max. Colors	16.7M
Brightness (Typ.)	300 nits
Viewing Angle (CR=10)(Typ.)	178°(H)/178°(V)
Contrast Ratio (Typ.)	3000:1
Touch Screen	Projective capacitive touch screen (optional)

System

OS Support	Windows® XP, Windows® 7, Windows® 10
DICOM Support	Optional

I/O

Audio	Audio-in x 1
Serial Port	USB x 1 for touch controller
Signal	DVI x 1, HDMI x 1, DP x 1
Speaker	2.5W speaker x 2 on back side

Mechanical and Environmental

Power Consumption	Full Loading: 38.5 Watts
Power Requirement	DC 12V / 5A power input
Operating Temperature	5°C ~ 40°C (41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C (14°F ~ 140°F)
Storage Humidity	10%~90% @ 35°C, non-condensing
IP rating	IP22
Dimension	637.8 x 378.2 x 62.5 mm
Packing Size	730 x 300 x 560 mm
Gross Weight	10.4kg (22.93lb)
Net Weight	6.6kg (14.55lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013/A12:2014(V3.1) FCC: Part 18 Class B



Ordering Information

- » MEDDP-627HNN-A1-1010
27" LCD Monitor. 300 nits, DVI-Dx1, HDMIx1, DPx1, DC 12V Adapter
- » MEDDP-627HPN-A1-1010
27" LCD Monitor. 300 nits, P-CAP Touch, DVI-Dx1, HDMIx1, DPx1, DC 12V Adapter
- » MEDDP-627TND-A1-1010
27" LCD Monitor. 300 nits, DVI-Dx1, HDMIx1, DPx1, DC 12V Adapter, DICOM
- » MEDDP-627TPD-A1-1010
27" LCD Monitor. 300 nits, P-CAP Touch, DVI-Dx1, HDMIx1, DPx1, DC 12V Adapter, DICOM

Medical Display Series Solution

MEDDP-624

24" Fanless Slim Medical LCD Monitor

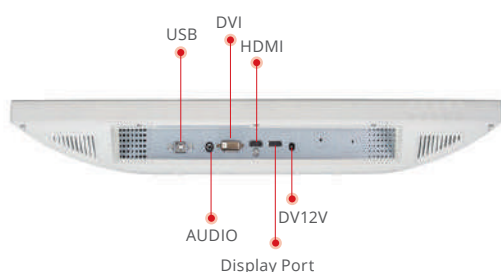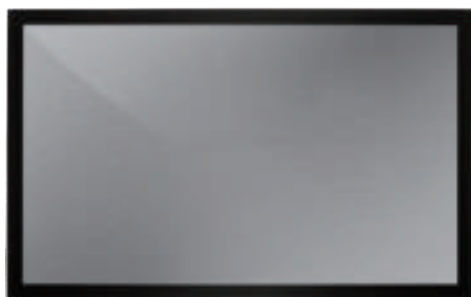**Features**

- 23.8" LCD Panel with LEDBacklight
- Compact and Terse Design
- DVI x 1, HDMI x 1, DPx1
- True Flat Screen with PCT Touch
- Invisible OSD Design
- Low Power Consumption
- Audio -2 x built-in

Specifications**Display**

Size	23.8"
Resolution	Full HD 1920 x 1080
Max. Colors	16.7M
Brightness (Typ.)	400nits
Viewing Angle (CR=10)(Typ.)	89°(H)/89°(V)
Contrast Ratio (Typ.)	1000:1
Touch Screen	Projective capacitive touch screen (optional)
IP Grade	IP 22

System

OS Support	Windows® XP, Windows® 7, Windows® 10
DICOM Support	Optional

I/O

Audio	Audio-in x 2
Serial Port	USB x 1 for touch controller
Signal	DVIx 1, HDMI x 1, DP x1
Speaker	2W speaker x 2 on back side

Mechanical and Environmental

Power Consumption	Full Loading:36.7Watts
Power Requirement	DC12V / 5A power input
Operating Temperature	5°C ~ 40°C(41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C(14°F ~ 140°F)
Storage Humidity	10%~90%@35°C, non-condensing
Dimension	576 x 344.3 x 62.1 mm
Packing Size	645 x 545 x 295 mm
Gross Weight	8.6kg (19lb)
Net Weight	6.4kg (14.1lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013/A12:2014(V3.1) FCC: Part 18 Class B

Ordering Information



- » **MEDDP-624HNN-A1-1010**
23.8" LCD Monitor.400 nits,DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter
- » **MEDDP-624HPN-A1-1010**
23.8" LCD Monitor.400 nits, P-CAP Touch,DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter
- » **MEDDP-624TND-A1-1010**
23.8" LCD Monitor.400 nits,DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter, DICOM
- » **MEDDP-624TPD-A1-1010**
23.8" LCD Monitor.400 nits, P-CAP Touch, DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter, DICOM

MEDDP-722

22" Fanless Slim Medical LCD Monitor



CE FC

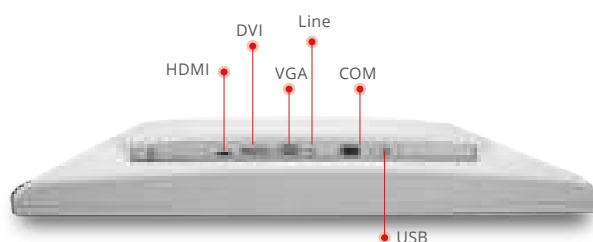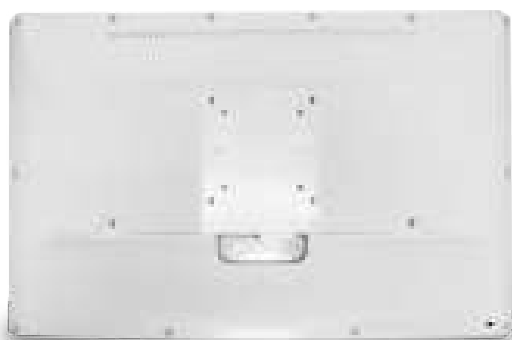

Features

- 21.5" LCD Panel with LED Backlight
- Compact and TerseDesign
- DVI x 1, HDMI x 1, DPx1
- True Flat Screen with Capacitive Touch
- Speaker -2 x built-in
- Support 2M/5M Camera (Optional)

Specifications

Display

Size	21.5"
Resolution	Full HD 1920 x 1080
Max. Colors	16.7M
Brightness (Typ.)	250 nits
Viewing Angle (CR=10)(Typ.)	178°(H)/178°(V)
Contrast Ratio (Typ.)	3000:1
Touch Screen	Projective capacitive touch screen (optional)
DICOM Support	Optional

System

OS Support	Windows® 7, Windows® 10
Webcam	2MP / 5MP Camera with Mic (optional)

I/O

Video Input	DVIx 1, HDMI x 1, VGA x1
Audio	Audio-in x 1
USB	USB x 1 for touch controller
Speaker	5W speaker x 2 on back side

Mechanical and Environmental

Power Consumption	Full Loading :28.7Watts
Power Requirement	DC12V
Operating Temperature	5°C ~ 40°C(41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C(14°F ~ 140°F)
Storage Humidity	10%~90%@35°C, non-condensing
Dimension	527.3 x 348.5 x 55.1 mm
Packing Size	570 x 478 x 260 mm
Gross Weight	8.4kg (18.51lb)
Net Weight	5.7kg (12.56lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013/A12:2014(V3.1) FCC: Part 18 Class B


Ordering Information

- » MEDDP-722-P1-A1-0010
Monitor.22" 250 nits.DC 12V.PCT
- » MEDDP-722-G1-A1-0010
Monitor.22" 250 nits.DC 12V.Glass
- » MEDDP-722-P1-A2-0010
Monitor.22" 250 nits.DC 12V.PCT DICOM
- » MEDDP-722-G1-A2-0010
Monitor.22" 250 nits.DC 12V.Glass DICOM


Medical Display Series Solution

MEDDP-622

22" Fanless Slim Medical LCD Monitor

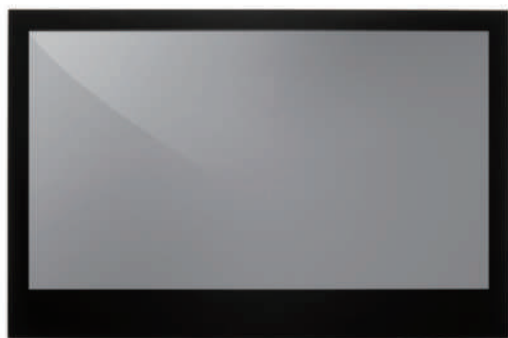

CE FC

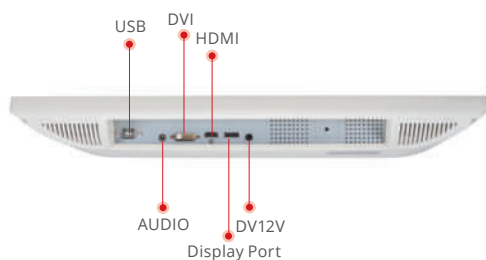**Features**

- 21.5" LCD Panel with LED Backlight
- Compact and TerseDesign
- DVI x 1, HDMI x 1, DPx1
- True Flat Screen with Capacitive Touch
- Invisible OSD Design
- Speaker -2 x built-in

Specifications**Display**

Size	21.5"
Resolution	Full HD 1920 x 1080
Max. Colors	16.7M
Brightness (Typ.)	350 nits
Viewing Angle (CR=10)(Typ.)	178°(H)/178°(V)
Contrast Ratio (Typ.)	1000:1
Touch Screen	Projective capacitive touch screen (optional)
IP Grade	IP 22

System

OS Support	Windows® XP, Windows® 7, Windows® 10
DICOM Support	Optional

I/O

Audio	Audio-out x 1
Serial Port	USB x 1 for touch controller
Signal	DVIx 1, HDMI x 1, DP x1
Speaker	2W speaker x 2 on back side

Mechanical and Environmental


Power Consumption	Full Loading :28.7Watts
Power Requirement	DC12V
Operating Temperature	5°C ~ 40°C(41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C(14°F ~ 140°F)
Storage Humidity	10%~90%@35°C, non-condensing
Dimension	527.3 x 348.5 x 55.1 mm
Packing Size	570 x 478 x 260 mm
Gross Weight	8.4kg (18.51lb)
Net Weight	5.7kg (12.56lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013/A12:2014(V3.1) FCC: Part 18 Class B

Ordering Information

- » MEDDP-622HNN-A1-1010
21.5" LCD Monitor.350 nits,DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter
- » MEDDP-622HPN-A1-1010
21.5" LCD Monitor.350 nits, P-CAP Touch,DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter
- » MEDDP-622TND-A1-1010
21.5" LCD Monitor.350 nits,DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter, DICOM
- » MEDDP-622TPD-A1-1010
21.5" LCD Monitor.350 nits, P-CAP Touch, DVI-Dx1.HDMIx1.DPx1.DC 12V Adapter, DICOM

MEDDP-615

15.6" Fanless Slim Medical LCD Monitor

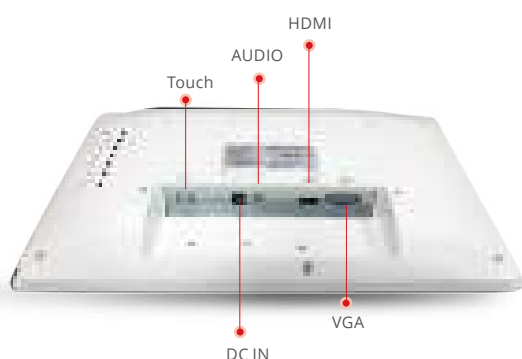

Features

- 15.6" 1920 x 1080 Resolution Display
- Projected Capacitive Multi-touch
- VGA input and HDMI input
- Stylish and elegant design

Specifications

Display

Size	15.6"
Resolution	Full HD 1920 x 1080
Max. Colors	16.7M
Brightness (Typ.)	300 nits
Viewing Angle (CR=10)(Typ.)	85°(H)/85°(V)
Contrast Ratio (Typ.)	700:1
Touch Screen	Projective capacitive touch screen

System

OS Support	Windows® XP, Windows® 7, Windows® 10
------------	--------------------------------------

I/O

Audio	Audio-in x 1
Serial Port	USB x 1 for touch controller
Signal	VGA x 1, HDMI x 1
Speaker	1 W speaker x 2 on back side

Mechanical and Environmental

Power Consumption	Full Loading :24.37Watts
Power Requirement	DC12V / 5A power input
Operating Temperature	5°C ~ 40°C(41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C(14°F ~ 140°F)
Storage Humidity	10%~90%@35°C, non-condensing
Dimension	387.8 x 232.9 x 38.4 mm
Packing Size	425.3 x 269.2 x 45.6 mm
Gross Weight	6.5 kg (14.33lb)
Net Weight	2.8 kg (6.2lb)

Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60950-1 EN 60601-1:2006/A1:2013/A12:2014 (V3.1) EN 62366:2007 + A1:2014 (V1.1) FCC: Part 18 Class B, Part 15 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)
----------------	--

Ordering Information


- » MEDDP-615HPN-A1-1010
15.6" LCD Monitor.300 nits.P-CAP touch,VGAx1.HDMIx1.DC 12V Adapter

MEDDP-415

15" Fanless Slim Medical LCD Monitor



CE FC

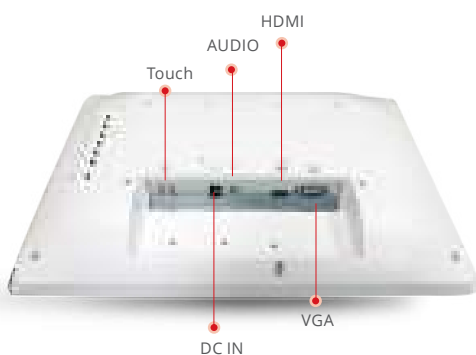**Features**

- 15 " 1024 x 768 Resolution Display
- P-cap touch
- Stylish And Elegant Design

Specifications**Display**

Size	15"
Resolution	1024 x 768
Max. Colors	16.2M
Brightness (Typ.)	300 nits
Viewing Angle (CR=10)(Typ.)	80°(H)/80°(V)
Contrast Ratio (Typ.)	700:1
Touch Screen	P-cap Touch, Protective Glass

System

OS Support	Windows®XP, Windows® 7, Windows® 10
------------	-------------------------------------

I/O

Audio	Audio-in x 1
Serial Port	USB x 1 for touch controller
Signal	VGA x 1, HDMI x 1
Speaker	1 W speaker x 2 on backside

Mechanical and Environmental

Power Consumption	Full Loading:24.3Watts
Power Requirement	DC12V / 5A power input
Operating Temperature	5°C ~ 40°C(41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C(14°F ~ 140°F)
Storage Humidity	10%~90%@35°C, non-condensing
Dimension	352.5x 276.1 x 45.0 mm
Packing Size	402.5x 326.1 x 80.0 mm
Gross Weight	3.7 kg (8.16lb)
Net Weight	2.6kg (5.73 lb)
Certifications	CE: EN 60601-1-2:2015(V4.0) EN 60601-1:2006 / A1:2013(V3.1) FCC: Part 18 Class B, Part 15 Class B

Ordering Information

- » MEDDP-415HNN-A1-1010
15" LCD Monitor.300 nits.VGAX1.HDMIx1.DC 12V Adapter
- » MEDDP-415HPN-A1-1010
15" LCD Monitor.300 nits, P-CAP touch.VGAX1.HDMIx1.DC 12V Adapter

MEDPC Series

Dependable, Ready to Use Platform for Medical Equipment & OEM/ODM

MEDPC series is designed to achieve the high requirements of Hospital IT field and medical task that a hospital has. It is fanless design ensures that it will be quiet, and stop infection spreading from hiding in the fan. It has wide selections of up-to-date upgrades, and it has 5-7 lifecycle. Best of all, this Medical Grade Computer is already medical certified just like all of our products.



Key Features

- » Medical certification with high performance CPU
- » Fanless design and no bacterial infection concern
- » Flexible function extension ability
- » Different options for different purpose

+ Ready-to-use Medical Certified Platform

MEDPC is certified with EN 60601-1, UL 60601-1, FCC & CE Class B regulation. Detailed ISO 13485 and 14971 Risk Management Control guarantee product quality.



+ Latest/Current Off-the-shelf Processor

From Intel® Quad Core i7, to Atom™ series, you can choose the best processor for the system. No matter for imaging capturing, data analyzing, photo viewing, or just EMR storage, you can always find right chipset.




+ Unique Medical Device Functions

MedPC products with IP-X1 enclosure are easy to clean with detergent and water splitting proof. Isolated IO interfaces like Ethernet, COM and USB let system connect to other medical device or accessories risk free.



+ 5-7 Year Longevity Lifecycle Support

Your time and efforts can now focus on business promotions and product development. A careful design and vendor approval approach as well as scheduled reviews, minimizes unwelcome surprises during the product life cycle.

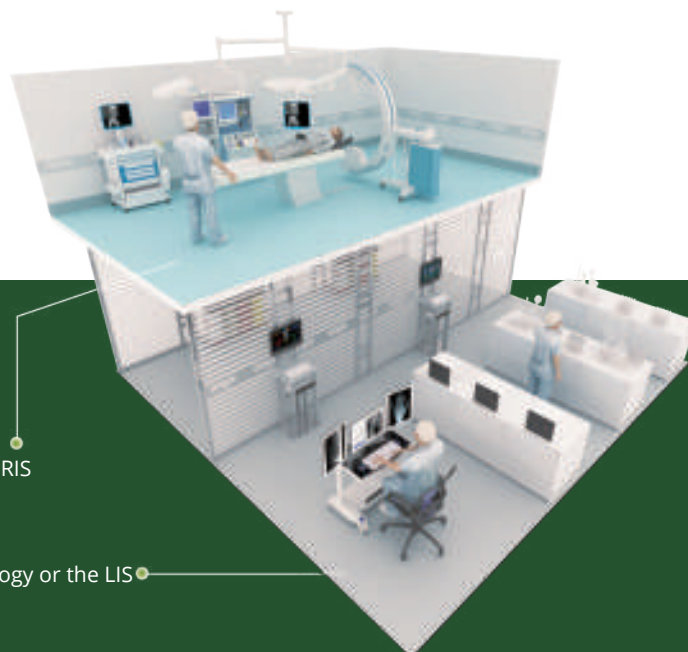

Biotechnology / Lab



His / NIS



RIS






Pharmaceutical

MEDPC Series for Medical Equipment & OEM/ODM

MEDPC-9200

High Performance Medical Grade Fanless Box PC with Intel® 6/7th Generation Core™ i Series

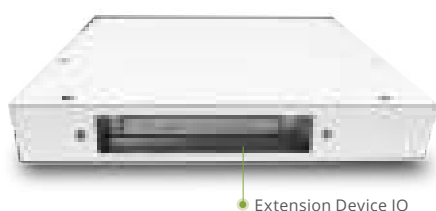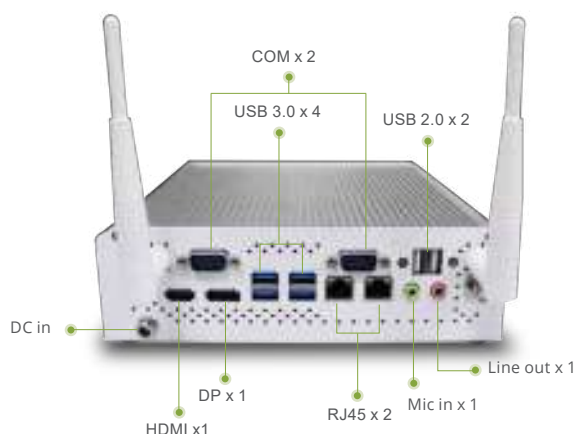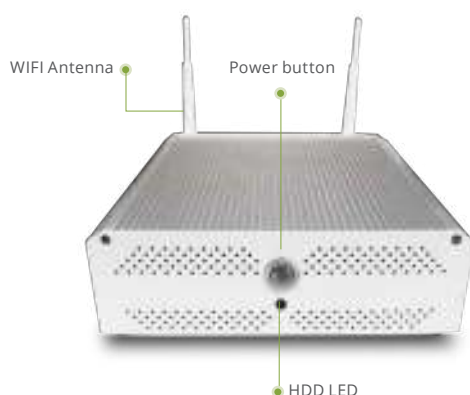

Features

- Intel® 6/7th Generation Core i, Processor
- Supports DDR4 up to 32GB
- Extension area: PCI-Express [x1] x 1(optional)
- Two Independent , Display: DP/HDMI
- Supports TPM 2.0
- Modularize Design

Application

- HIS, LIS, RIS
- Pharmaceutical industry
- Biotech Lab
- Signage in hospital
- Equipment control

Specifications

Main Specifications

Processor	Intel® 7th/6th Generation Core™ i7/i5/i3
System Memory	Supports Dual Channel DDR4 SODIMM up to 32 GB
OS Support	Windows® 7, Windows® 8, Windows® 10, Linux®
Extension area	PCI-Express [x1] x 1(optional)
Storage Disk Drive	2.5" SATA SSD x 1
Security	TPM 2.0
Power Requirement	DC 12V

I/O


USB	USB 3.0 x 4 , USB 2.0 x 2
Serial Port	RS-232 x 2
Ethernet	Gigabit LAN x 2
Video Out	Display Port x 1, HDMI x 1
Audio	Mic-in, Line-out

Mechanical and Environmental

Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Dimension	197 x 197 x 59.5 mm for main layer 197 x 197 x 44 mm for extension layers
Package Size	300 x 280 x 95 mm
Gross Weight	3.3 kg (7.25 lb) in the single layer, 4.0 kg (7.25 lb) in two layer
Net Weight	2.5 kg in the single layer, 3.7 kg in two layers

High Performance Medical Grade Fanless Box PC with Intel® 6/7th Generation Core™ i Series

Dimension / Unit: mm

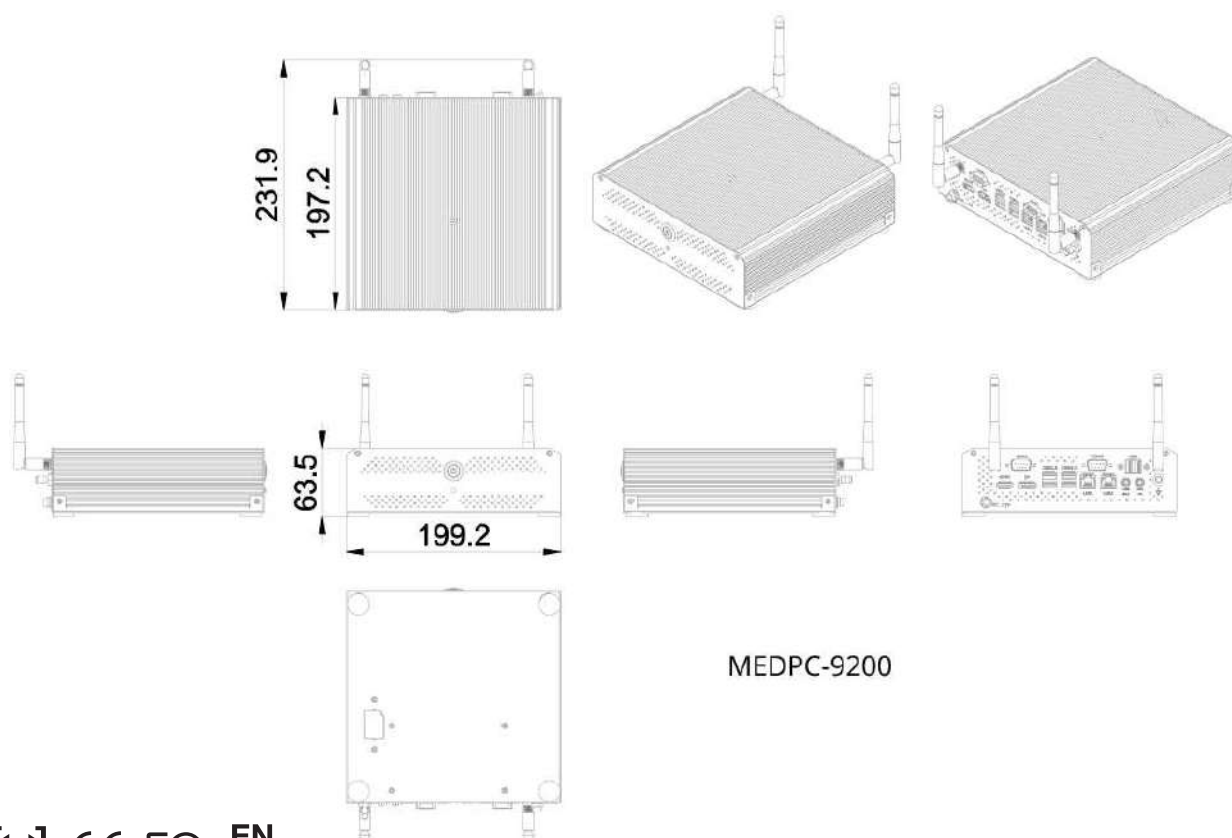

Ordering Information

- » MEDPC-9200-N1-A1-0010
Medical Box PC.i7-6700TE.Fanless.DC 12V
- » MEDPC-9200-N2-A1-0010
Medical Box PC.i5-6500TE.Fanless.DC 12V


Optional Accessories

- » 1255300907
(AOH)(TF) Power Adapter.100-240Vac.50/60Hz.1.5A..12Vdc.7.5A.90W.FSP.FSP090M-RHA(w/Lock)
- » OPM-C16W-A7
WLAN Kit.802.11a/b/g/n w/BT 4.0.Atheros AR5B22
- » M92-SEC-A1
MEDPC-9200.extension area with PCIe[x1] riser
- » OPM-C10W-A7
WLAN Kit.802.11a/b/g/n/ac.BT 4.2.Intel 8265


MEDPC Series for Medical Equipment & OEM/ODM

MEDPC-9300

High Performance Medical Grade Box PC with AMD Ryzen™ Embedded V807B/V1605B

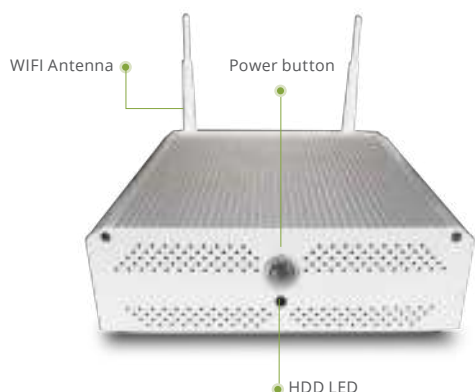

COM x 2

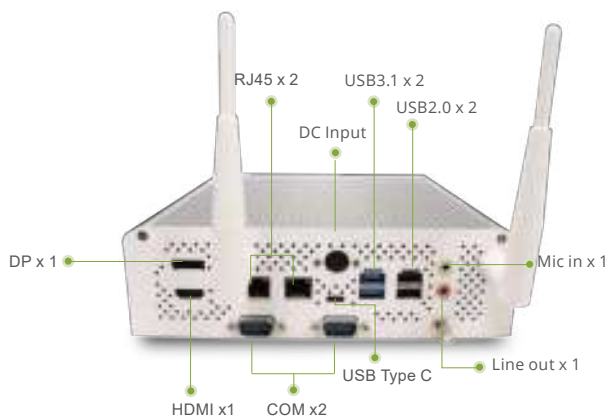

Features

- AMD Ryzen Embedded V1605B Processor up to 3.6GHz
- Supports DDR4 SO-DIMM, Max. 32GB
- AMD Vega GPU with 8 Compute Units
- Three Independent 4K Display: 1x HDMI 2.0, 1x DisplayPort, 1x USB Type-C
- 1x USB 3.1 Type-C, 2x USB 3.1 Type-A
- 1x PCI Express[x8] in Extension Layer(optional)
- Supports fTPM2.0

Application

- HIS, LIS, RIS
- Pharmaceutical industry
- Biotech Lab
- Signage in hospital
- Equipment control

Specifications

System

Processor	AMD Ryzen Embedded V1605B Processor
System Memory	DDR4 SoDIMM x2, Max. 32GB
Graphics	AMD Vega GPU with 8 Compute Units
Expansion Interface	PCI Express[x8] x1
Storage Disk Drive	2.5" SATA SSD x1
Security	fTPM2.0
Wireless Communication	802.11ac/a/b/g/n(optional), Bluetooth(optional)
Power Requirement	DC 12~24V
OS Support	Win 10 IoT Enterprise 64-bit / Linux Ubuntu 64-bit

Display

Video Out	1x HDMI 2.0, 1x Display Port 1.4, 1x USB Type-C
Display	Up to 3840 x 2160 resolution, at 60Hz
HDMI	Up to 3840 x 2160 resolution, at 60Hz

I/O


USB	2x USB 3.1 Type-A, 1x USB 3.1 Type-C, 2x USB2.0
Serial Port	2x RS-232
Audio	Mic, Line-out
LAN	2x Gigabit Ethernet
Audio Jack	Mic, Line-out

Mechanical and Environmental

Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Dimension	197 x 197 x 59.5 mm for main layer 197 x 197 x 44 mm for extension layers
Package Size	300 x 280 x 95 mm
Gross Weight	3.3 kg (7.25 lb) in the single layer, 4.0 kg (7.25 lb) in two layer
Net Weight	2.5 kg in the single layer, 3.7 kg in two layers

High Performance Medical Grade Box PC with AMD Ryzen™ Embedded V807B/V1605B

Dimension / Unit: mm

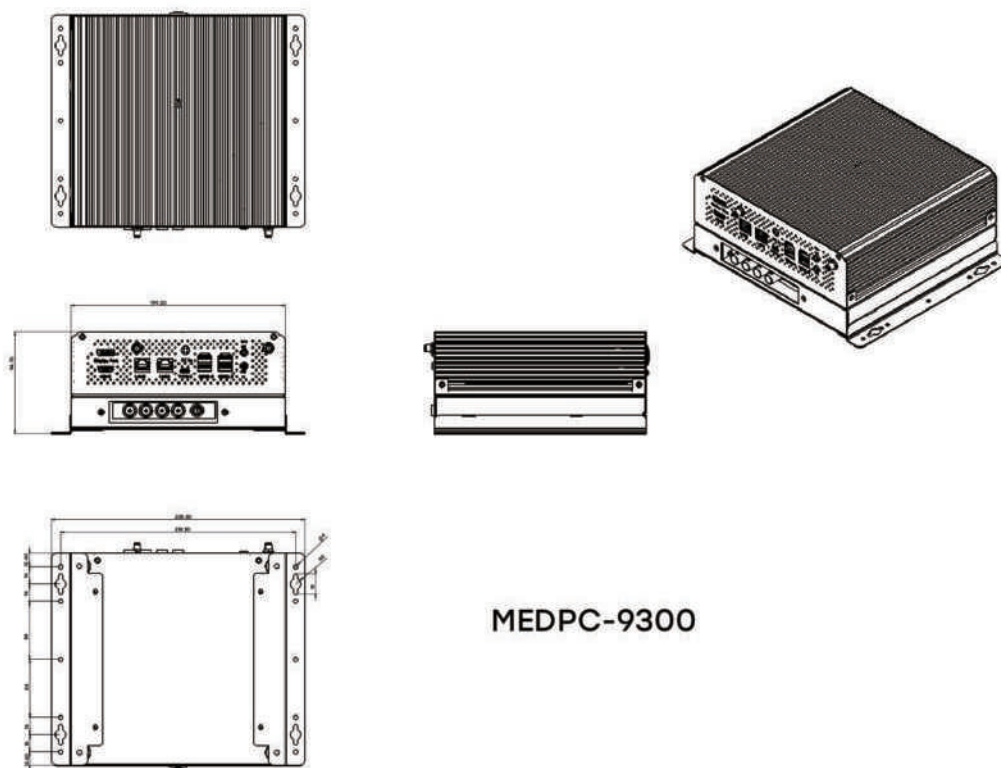

Ordering Information

- » MEDPC-9300-N1-A1-0010
MEDPC-9300. AMD Ryzen™ Embedded V1605B.

Optional Accessories

- » 1255301205
(AOH)(TF)Medical Power Adaptor.AC/DC.100-240V.12V.10A.120W.W/4P DIN.Adapter.ATM-P120
- » OPM-C10W-A10
WLAN Kit.Intel 8265.802.11ac/a/b/g/n.BT 4.2.with dual band antenna.MEDPC-9300
- » M93-SEC-A1
MEDPC-9300.extension area.
- » OPM-C12W-A10
WLAN Kit.Qualcomm Atheros.802.11ac/a/b/g/n.BT 4.1.with dual band antenna. MEDPC-9300

MEDPC Series for Medical Equipment & OEM/ODM


MEDPC-5700

High Performance Medical Grade Box PC with Intel® 4th Generation Core™ i Series



4 x USB 2.0

Gigabit LAN x 2

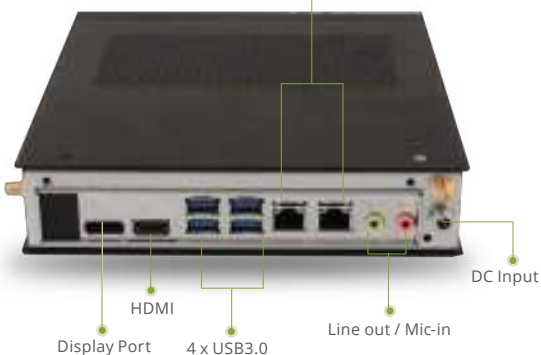

Display Port

HDMI

4 x USB3.0

Line out / Mic-in

DC Input

Features

- Intel® 4th Generation Quad Core i7 /i5/ i3 Processor
- Intel® Q87 Chipset
- Supports Dual Channel DDR3 SODIMM up to 16GB
- High Speed USB 3.0 Ports
- +12V to +24V Wide Range DC Input

Application

- HIS, LIS, RIS
- Pharmaceutical industry
- Biotech Lab
- Signage in hospital
- Equipment control

Specifications

Main Specifications

Processor	Intel® 4th Generation Quad Core i7 /i5/ i3 Processor
System Memory	Supports Dual Channel DDR3 SODIMM up to 16GB
Chipset	Intel® Q87
OS Support	Windows® 7, Windows® 8, Windows® 10, Linux® (optional)
Storage Disk Drive	2.5" SATA SSD Drive bay x 1

I/O

USB	USB 3.0 x 4, USB 2.0 x 4
Ethernet	Gigabit LAN x 2
Video Out	Display Port x 1, HDMI x 1
Audio	Mic-in, Line-out


Mechanical and Environmental

Power Requirement	DC12V~24V power input
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Dimension	185 x 194 x 40 mm
Package Size	255 x 160 x 275 mm
Gross Weight	2.9kg (6.4lb)
Net Weight	1.5kg (3.3lb)

Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013/A12:2014 (V3.1) FCC: Part 18 Class B, Part 15 Class B, UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)
----------------	--

High Performance Medical Grade Box PC with Intel® 4th Generation Core™ i Series

Dimension / Unit: mm

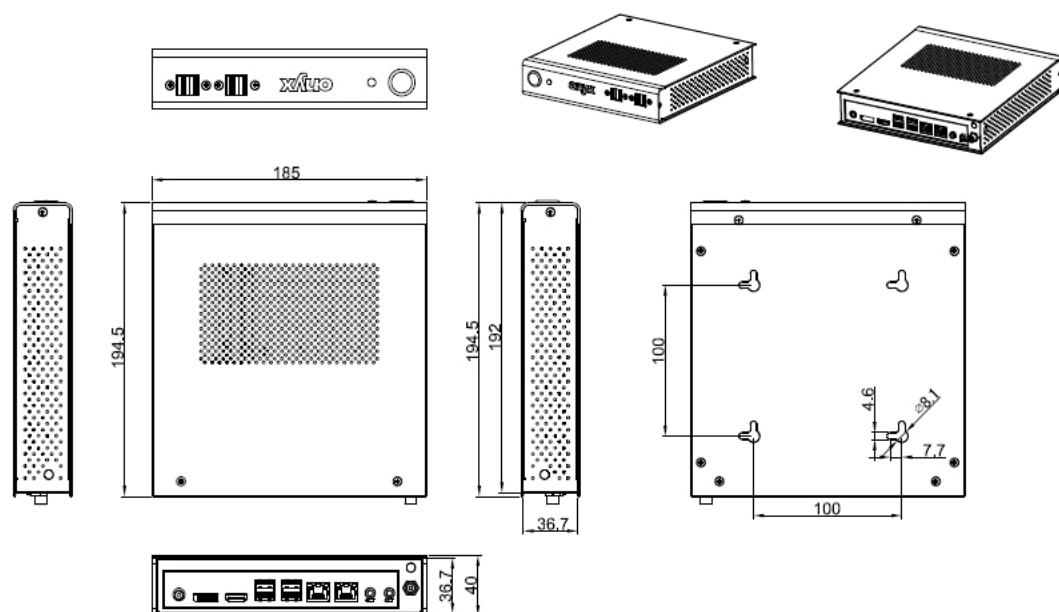

Ordering Information

- » MEDPC-5700-A1-1010
Emb, Sys., i7-4770TE, DC 12V~24V, 4GB RAM, 1HDMI, 2LAN, 4USB 3.0
- » MEDPC-5700-A1-1020
Emb, Sys., i5-4590TE, DC 12V~24V, 4GB RAM, 1HDMI, 2LAN, 4USB 3.0
- » MEDPC-5700-A1-1030
Emb, Sys., i3-4330TE, DC 12V~24V, 4GB RAM, 1HDMI, 2LAN, 4USB 3.0

Optional Accessories

- » 1255301202
Power Adapter. AC/DC.100~240V.24V.5A.120W.W/ Lock
- » OPM-C16W-A1
WLAN Kit.802.11a/b/g/n w/BT 4.0.Mini Card.dual white ext. antenna.Atheros AR5B22

MEDPC-2700

Fanless Medical Grade Box PC with Intel Cherry Trail Process



Features

- Intel® Cherry Trail x5-Z8350 SoC
- Onboard DDR3L 2 GB memory
- Onboard 32GB eMMC storage
- 1x Gigabit LAN, 4x USB 2.0, 1x HDMI
- Optimized Fan-less Cooling Design
- 3G/4G LTE/LoRa available (Optional)

Application

- Pharmaceutical industry
- Biotech Lab
- Signage in hospital
- Equipment control
- Internet getaway

Specifications

Main Specifications

Processor	Intel® Cherry Trail x5-Z8350 SoC
System Memory	Onboard DDR3L 2GB SODIMM up to 4 GB
GPU	Intel® HD Graphics
OS Support	Android 6.0, Windows® 7, Windows® 8, Windows® 10, Linux® (optional)
Storage Disk Drive	Onboard eMMC storage up to 32 GB
Wireless Communication	IEEE 802.11 a/b/g/n. BT 4.0
Power Requirement	5V DC-in

I/O


USB	4 x USB2.0 Type A,
Ethernet	1x RJ45 Gigabit LAN
Video	1 x HDMI 2.0,
Audio	N/A

Mechanical and Environmental

Operating Temperature	0°C ~ 30°C (32°F ~ 86°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Dimension	131 x 97.8 x 32 mm
Package Size	340 x 232 x 66 mm
Gross Weight	2.9kg (6.4lb)
Net Weight	1.5kg (3.3lb)
Certification	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013/A12:2014 (V3.1) FCC: Part 18 Class B, Part 15 Class B, UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

Fanless Medical Grade Box PC with Intel Cherry Trail Process

Dimension / Unit: mm

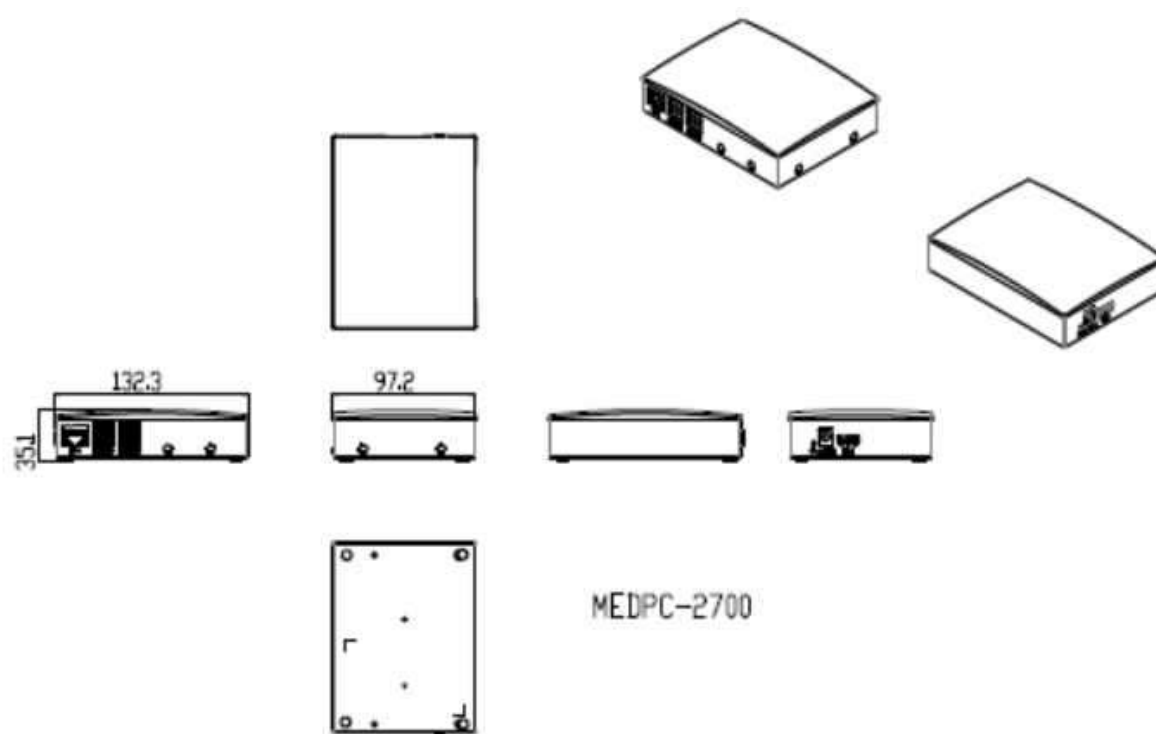

Ordering Information

- » MEDPC-2700-A1-1010
MEDPC.Z8350.Fanless.DC5.2GB RAM.32GB EMMC. Windows 10

Optional Accessories

- » 1255300170
(AOH)(TF)Medical Power Adaptor.AC/DC.100 ~ 240V.5V.3.5A.17.5W.90D DC Plug.Adapter.ATM020-W050U(USA-Level VI)
- » OPM-C13W-A0
WLAN Kit.IEEE 802. 11 a/b/g/n.2. 4GHz and 5GHz.BT 4.2.for MEDPC-2700.for MEDPC-2700
- » OPM-C13W-A1
WLAN Kit.IEEE 802. 11 a/b/g/n.2. 4GHz and 5GHz..for MEDPC-2700
- » OPM-C13W-A2
BT 4.2 module.for MEDPC-2700
- » OPM-Y80T-A0
UART Wireless function Board.for MEDPC-2700

MEDPC Series for Medical Equipment & OEM/ODM

MEDPC-2100

Ultra slim Intel Bay Trail SoC Embedded Platform for HIT



Power Switch



Features

- Intel® Bay Trail J1900 (Quad Core) 2GHz
- Multiple display output support
- Fanless easy clean design
- Mini Size

Application

- HIS, LIS, RIS
- Pharmaceutical industry
- Biotech Lab
- Signage in hospital
- Equipment control

Specifications

Main Specifications

Processor	Intel® Celeron J1900 (Quad Core) 2GHz
Video Chipset	Intel® HD Graphics
Display Memory	Shared Memory
System Memory	204-pin DDR3L support to 8GB
Expansion	1 x Half size Mini Card Slot; 1 Mini card slot
System Storage	CFAST Cardx 1
OS Support	Windows® 7, Windows® 8, Windows® 10, Linux®

I/O


USB	USB 2.0 x 3, USB 3.0 x 1
COM Port	RS-232 x 1
Video Interface	VGA x 1, HDMI x 1
Power Jack	DC Power Input Connector
Ethernet	GbE LAN x 1 by RJ-45
SMA Connector	SMA Connector for WLAN antenna (removable) (optional)
Power Switch	1 Power switch button and 2 LED indicator (HDD, SYS) (Orange Red, Green)
Audio	Line out / Line-in

Mechanical and Environmental

Power Consumption	Full Loading: 38.453Watts
Power Requirement	DC 12V power input
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Dimension	196 x 131 x 50 mm
Package Size	305 x 225 x 230 mm
Gross Weight	2.4kg (5.28lb)
Net Weight	1.2Kg (2.64lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013/A12:2014 (V3.1) FCC: Part 18 Class B, Part 15 Class B, UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

Ultra slim Intel Bay Trail SoC Embedded Platform for HIT

Dimension / Unit: mm

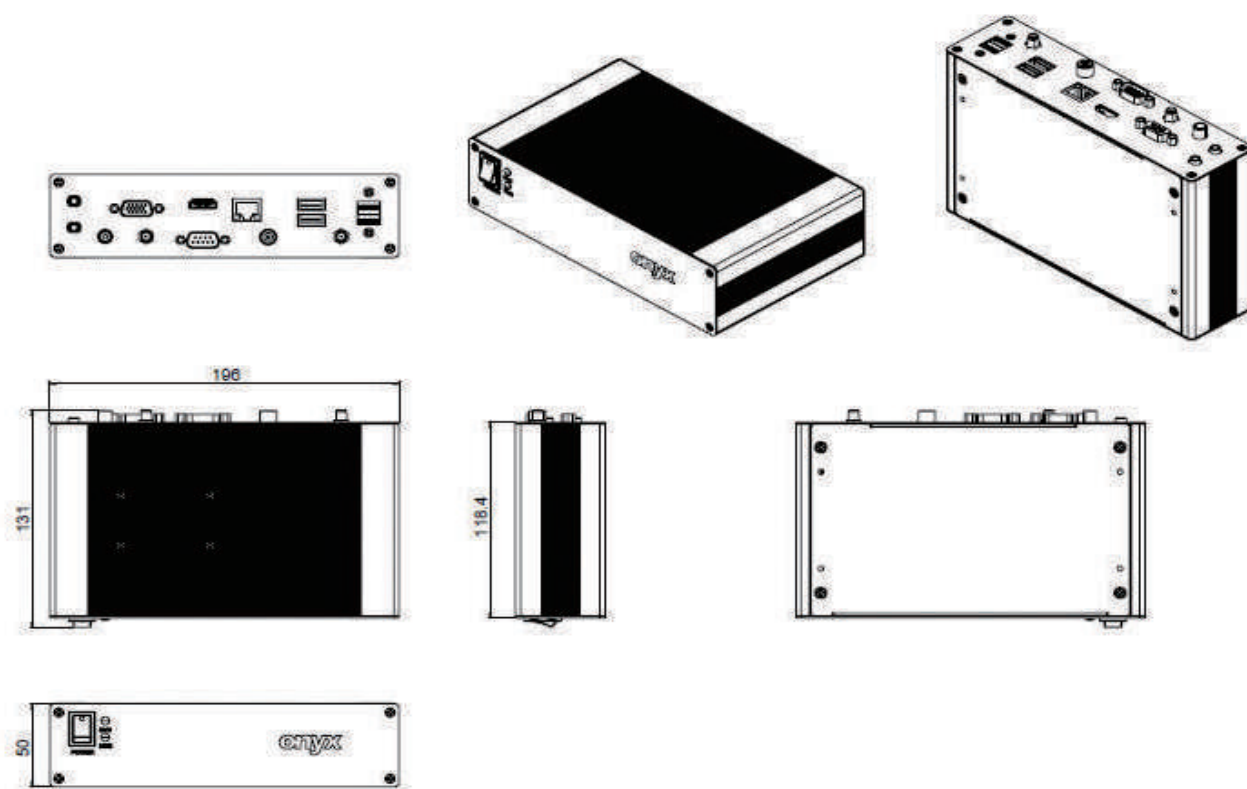

Ordering Information

» MEDPC-2100-A1-1010

Emb. Sys., J1900 2.42GHz, DC 12V, 2GB RAM, 1 LAN, 1 USB 3.0, 3 USB 2.0, 1 VGA, 1HDMI, 1 COM

Optional Accessories

» 1757306039


Medical Power Adaptor.100 ~ 240V.12V.5A.60W.DC.W/ Lock.Adapter.ATM065-P120(w/core)

» OPM-C16W-A7

WLAN Kit.Atheros AR1111.802.11b/g/n+BT 4.0.Mini Card.dual white ext. antenna.for MEDPC-2100

MEDPC-2000

Intel Bay Trail SoC Embedded Platform for HIT

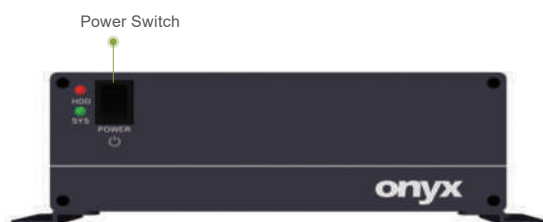

Features

- Intel® Bay Trail J1900 (Quad Core) 2GHz
- Multiple display output support
- Fanless easy clean design
- Compact Size

Application

- HIS, LIS, RIS
- Pharmaceutical industry
- Biotech Lab
- Signage in hospital
- Equipment control

Specifications

Main Specifications

Processor	Intel® Celeron J1900 (Quad Core) 2GHz
Video Chipset	Intel® HD Graphics
Display Memory	Shared Memory
System Memory	204-pin DDR3L support to 8GB
Expansion	1 x Half size Mini Card Slot
System Storage	2.5" SATA HDD / SSD x 1
OS Support	Windows 7, Windows 10

I/O


USB	USB 2.0 x 3, USB 3.0 x 1
COM Port	RS-232 x 2
Video Interface	VGA x 1, HDMI x 1
Ground Pin	Grounding PIN 42801(removable)
Power Jack	DC Power Input Connector
Kensington Lock Hole	1 Kensington Lock Hole
Ethernet	GbE LAN x 2 by RJ-45
SMA Connector	SMA Connector for WLAN antenna (removable) (optional)
Power Switch	1 Power switch button and 2 LED indicator (HDD, SYS) (Orange Red, Green)
Audio	Line out / Mic-in

Mechanical and Environmental

Power Consumption	Full Loading: 38.453Watts
Power Requirement	DC 12V power input
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Dimension	214 x 138.9 x 72 mm
Package Size	305 x 205 x 230 mm
Gross Weight	2.7kg (5.95lb)
Net Weight	1.7kg (3.75lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/ A1:2013/A12:2014 (V3.1) FCC: Part 18 Class B, Part 15 Class B, UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

Intel Bay Trail SoC Embedded Platform for HIT

Dimension / Unit: mm

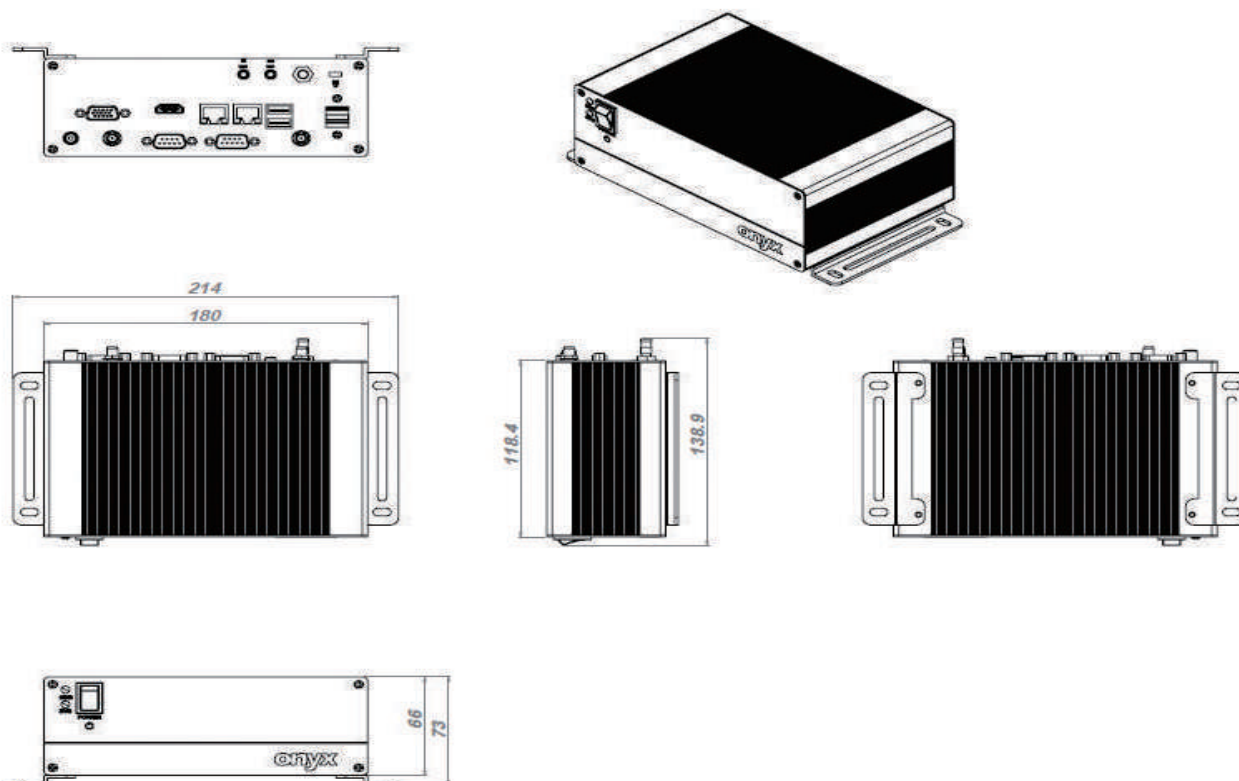

Ordering Information

- » MEDPC-2000-A1-1010
Emb. Sys., J1900 2.42GHz, DC 12V, 2GB RAM, 2 LAN, 1 USB 3.0, 3 USB 2.0, 1 VGA, 1HDMI, 2 COM

Optional Accessories

- » 1757306039
Medical Power Adaptor.100 ~ 240V.12V.5A.60W.DC.W/ Lock.Adapter.ATM065-P120(w/core)
- » OPM-C16W-A7
WLAN Kit.Atheros AR1111.802.11b/g/n+BT 4.0.Mini Card.dual white ext. antenna.for MEDPC-2000

Healthcare Infotainment Solution

Onyx is proud to introduce its medical infotainment solutions to reduce the workload of nurses and maximize patient's hospital experience during their stays. Onyx Infotainment series are offered in 10.1"/11.6"/15.6"/18.5" touch panel LCDs and are all low power high performance all-in-one terminals with high brightness, wide viewing angles, and anti-microbial design. From the high performance Intel processor to power saving ARM CPUs, Onyx Infotainment series allows customers to select from a wide variety of bedside solutions that best fits their need and budget.



Key Features

- » HD video quality with HDMI input
- » 10.1" to 18.5" Wide Color TFT LCD w/ Multi Touch
- » USB interface to host computer
- » Light Weight from 1.5 to 3.2kg
- » Wire Remote Control w/ handset Function
- » Smart Card Reader / MSR / VOIP Phone, Web Camera, High Quality Speakers
- » Reading Light
- » Extension Features: RFID, Smart Card Reader, Barcode scanner
- » EN60601-1 / UL 60601-1

✚ Complete Range of Medical Solutions to Suit Your Needs

From display systems such as bedside monitors to medical grade boxPCs and all-in-one terminals, Onyx offers a comprehensive assortment of medical IT solutions to cover virtually any computing need in the healthcare community.



✚ Peripheral Support Features that Extend Your Efficiency

Increasing the efficiency of your healthcare facility is conveniently managed with the addition of intelligent peripheral devices. Like smart card and magnetic swipe card readers, high resolution webcams, and 10-point multi-touch displays.



✚ Ergonomic and Cost-effective Design

The Bedside Infotainment Series offers solutions that are both lightweight and compact in size, making them easy to carry, install, and manage for medical staff. Units with an 18.5" display weigh only 3.5kg, while units with an 11.6" display weigh just 1.5kg. The competitively priced Bedside Infotainment Series makes it an ideal solution to fit a multitude of medical IT applications, while at the same time saving on your budget.




✚ Power over Ethernet (PoE)

The advantages of using PoE include providing a single cable for both data and power that eliminates the need for extra power cords; ease of installation as there is no need to coordinate data and power sources which can leave extra lengths of exposed cabling; and the ability to use existing infrastructure, minimizing interruptions to facilities and patients.






✚ Multifunctional Remote Control

Controlling the Bedside Infotainment system has been made as simple and convenient as possible with the multifunctional remote control. The controller includes a VOIP phone as well as all buttons necessary to control the unit. An optional 2D barcode scanner is also available.

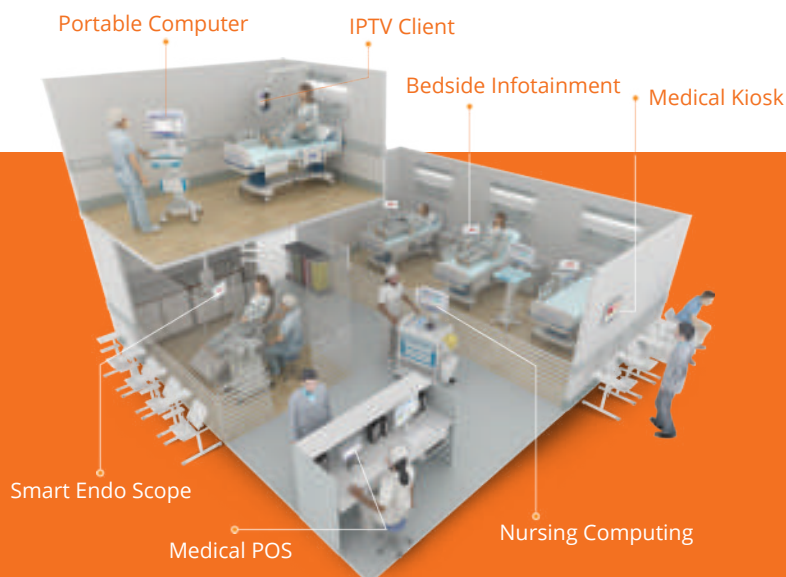

ONYX-BE182

18.5" Fanless Bedside Infotainment Touch Terminal

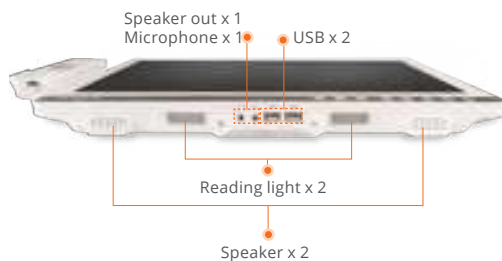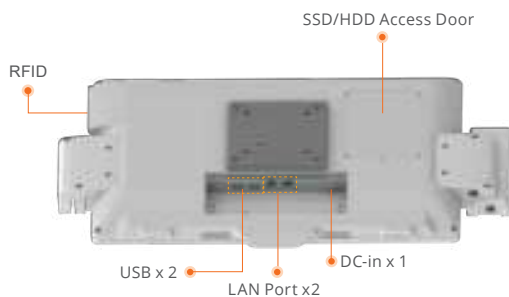

Features

- Intel® J1900 2.42GHz Quad Core Processor
- 18.5" Wide Color TFT LCD Touch Terminal
- PCT for supporting Multi-Touch
- Wire Remote-Control w/ Handset Function
- VOIP Phone, Webcam, High Quality Speaker, MSR, Smart Card Reader
- Reading Light
- Extension Feature: RFID, Barcode Scanner
- IP65 Water Proof in front
- EN 60601-1, UL 60601-1

Specifications

Main Specifications

Processor	Intel® Celeron J1900 Quad Core 2.42GHz
System Memory	Supports DDR3 SODIMM up to 8GB
Expansion Interface	Mini Card x 2
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1
Security	Trusted Platform Module, Smart Card Reader (optional), MSR (optional), RFID (optional)
Wireless communication	802.11b/g/n(optional), Bluetooth 4.0 (optional)
Speaker	3W x 2
Camera	2 Megapixels
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down
Power Requirement	DC 12~24V
OS Support	Windows 7, Windows 10, Linux

Display

Size	18.5" (16:9) Color TFT LCD
Resolution	1366 x 768 HD / 1920 x 1080 FHD (optional)
Max. Colors	16.7M
Luminance	250 nits / 350 nits (optional)
View Angle	170(H)/160(U)
Contrast Ratio	1000:1
MTBF	30,000 Hours / 50,000 Hours
Touch Screen	Projected Capacitive Touch / 5-Wire Resistive Touch

I/O


USB	USB2.0 x 4
Serial Port	Isolated RS-232 x 1 (optional)
Ethernet	Isolated Gigabit LAN x 2
Audio	Mic-in, Line-out

Mechanical and Environmental

Infection Control	Anti-Bacteria (optional)
Power Requirement	DC 12V ~24V
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of protection	Front Panel: IP65; Whole Unit: IPX1
Dimension	463 x 336 x 48mm
Package Size	721 x 224 x 464 mm
Gross Weight	9kg (19.84 lb)
Net Weight	4.2 kg (9.26 lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

18.5" Fanless Bedside Infotainment Touch Terminal

Dimension / Unit: mm

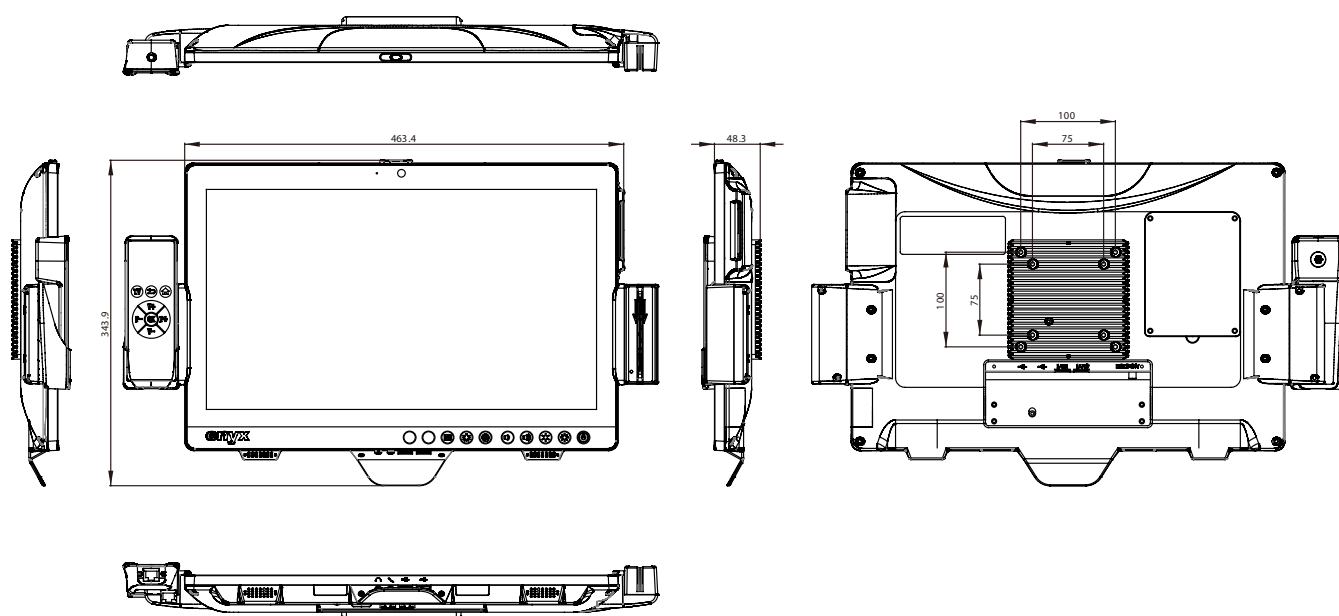

Ordering Information



- | | |
|---|---|
| <p>» ONYX-BE182DT-A1-1010
18.5" Infotainment Terminal. Intel Quad-Core J1900. 2G RAM. Fanless. Resistive Touch. Reading Light. Webcam. Smart Card Reader</p> <p>» ONYX-BE182DT-F1-1010
18.5" Infotainment Terminal. Intel Quad-Core J1900. 2G RAM. Fanless. Resistive Touch. Reading Light. Webcam. Smart Card Reader. RFID</p> | <p>» ONYX-BE182DT-A2-1010
18.5" Infotainment Terminal. Intel Quad-Core J1900. 2G RAM. Fanless. PCT Touch. Reading Light. Webcam. Smart Card Reader</p> <p>» ONYX-BE182DT-F2-1010
18.5" Infotainment Terminal. Intel Quad-Core J1900. 2G RAM. Fanless. PCT Touch. Reading Light. Webcam. Smart Card Reader. RFID</p> |
|---|---|

Optional Accessories

- » 1255300657
Medical Power Adapter, 60W, 24V
- » OPM-T018-A1
Handset w/o Dual Keypads , CAM & Nurse Call
- » OPM-T018-A2
Handset with Dual Keypads , CAM. w/o Nurse Call
- » OPM-C16W-A5
WLAN kit. 802.11 a/b/g/n + Bluetooth 4.0LE/ 3.0HS/ 2.1EDR for BE182
- » OPM-S02C-A1
MSR for BE381

ONYX-1531

15.6" Fanless Bedside Infotainment Touch Terminal

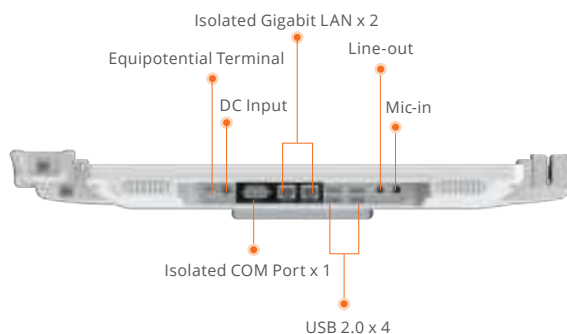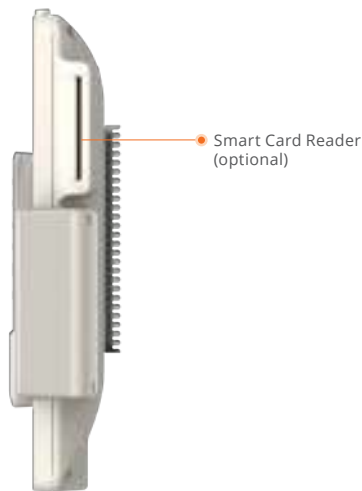

Features

- Intel® Celeron J1900 2.4GHz Quad Core Processor
- 15.6" High Brightness 300-nit Full HD LCD
- Supports DDR3L SODIMM up to 8GB
- 5-wire Resistive Touch Screen / Capacitive Multi-Touch Screen
- Easy Cleaning Flat Screen
- 7 Programmable Smart Function Keys
- COM/LAN Medical Isolation
- 2.0M Pixels Camera (optional)
- Handset w/2D Barcode Scanner (optional)
- Trusted Platform Module / Smart Card Reader(optional) / MSR(optional) / RFID (optional)
- +12V to +24V wide range DC input

Specifications

Main Specifications

Processor	Full loading: 19 Watts
System Memory	Supports DDR3L SODIMM up to 8GB
Expansion Interface	Mini Card x 1
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1, mSATA SSD x 1
Security	Trusted Platform Module, Smart Card Reader (optional), MSR (optional), RFID (optional)
Wireless Communication	802.11a/b/g/n(optional), Bluetooth 4.0 (optional)
Speaker	3W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down
Power Requirement	DC 12~24V
OS Support	Windows 7, Windows10, Linux

Display

Size / Type	15.6" LCD
Max. Resolution	1920 x 1080
Luminance(cd/m2)(TYP)	300 nits
Max. Colors	16.7 M
Viewing Angle	160°(H)/140°(V)
Contrast Ratio	700:1
Back Light Life Time	> 15,000 hours
Touch Screen	5-Wire Resistive / Capacitive Multi-Touch

I/O


USB	USB 2.0 x 4
Serial Port	Isolated RS-232 x 1
Ethernet	Isolated Gigabit LAN x 2
Audio	Mic-in, Line-out

Mechanical and Environmental

Power Consumption	Full loading: 19 Watts
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	IP65 in the front, IPX1
Dimension	398 x 265 x 39 mm
Package Size	721 x 224 x 464 mm
Gross Weight	6.5 kg (14.33lb)
Net Weight	2.8 kg (6.2lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

15.6" Fanless Bedside Infotainment Touch Terminal

Dimension / Unit: mm

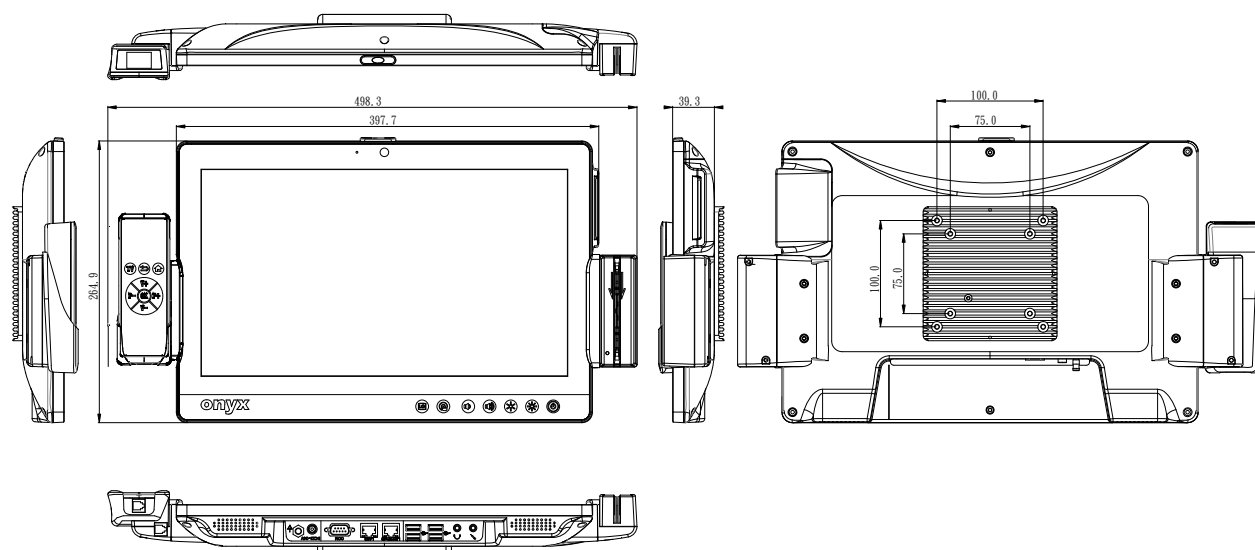

Ordering Information



- » ONYX-1531ET-A1-1010
Slim Medical Panel PC, 15.6" LCD, Intel Celeron J1900, 2GB RAM, DC 12~24V, Resistive Touch
- » ONYX-1531ST-A1-1010
Slim Medical Panel PC, 15.6" LCD, Intel Celeron J1900, 2GB RAM, DC 12~24V, Capacitive Touch

Optional Accessories

- | | |
|---|--|
| <ul style="list-style-type: none"> » 1757306039
Medical Power Adapter, 60W, 12V » OPM-T008-A1
Smart Card Reader Kit » OPM-S02C-A1
Magnetic Stripe Reader Kit » OPM-T011-A1
2M Pixels Camera with Mic Kit » OPM-T018-A5
Handset Kit » OPM-S04R-A1
Smart Card + RFID Reader Kit | <ul style="list-style-type: none"> » OPM-T018-A6
Handset w/Dual-Keypads, Camera » OPM-C16W-A5
WLAN Kit, IEEE 802.11a/b/g/n + Bluetooth 4.0 » OPM-P30D-A10
Power over Ethernet kit |
|---|--|

ONYX-1222

11.6" Fanless Bedside Infotainment Touch Terminal

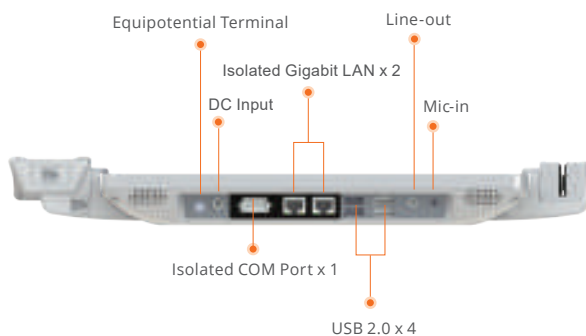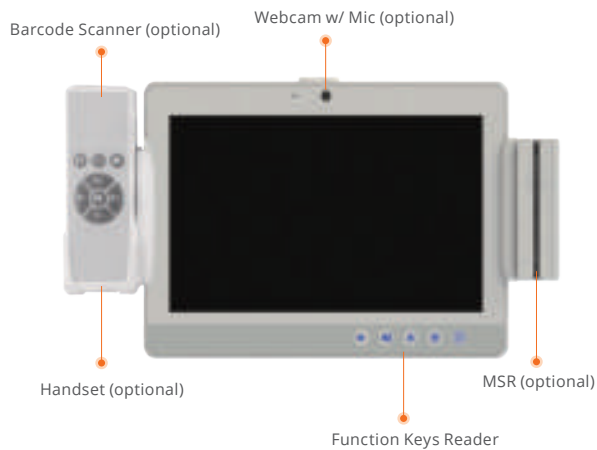

Features

- Intel® Celeron J1900 2.42GHz Quad Core Processor
- 11.6" High Brightness 400-nit WXGA LCD
- Supports DDR3 SODIMM up to 8GB
- 5-wire Resistive Touch Screen / Capacitive Multi-Touch Screen
- Easy Cleaning Flat Screen
- 5 Programmable Smart Function Keys
- COM/LAN Medical Isolation
- High Speed USB 3.0 Port
- 2.0M Pixels Camera (optional)
- Handset w/2D Barcode Scanner (optional)
- Trusted Platform Module / Smart Card Reader(optional) / MSR(optional) / RFID (optional)

Specifications

Main Specifications

Processor	Intel® Celeron J1900 Quad Core 2.42GHz
System Memory	Supports DDR3 SODIMM up to 8GB
Expansion Interface	Mini Card x 2
Storage Disk Drive	2.5" SATA Hard Disk Drive/SSD x 1
Security	Trusted Platform Module, Smart Card Reader (optional), MSR (optional), RFID (optional)
Wireless Communication	802.11a/b/g/n(optional), Bluetooth 4.0 (optional)
Speaker	1W x 2
Function Key	Speaker Volume Up/Down, LCD Brightness Up/Down
Power Requirement	DC 12~24V / Power over Ethernet
OS Support	Windows 7, Windows 10, Linux

Display

Size / Type	11.6" LCD
Max. Resolution	1366 x 768
Luminance(cd/m2)(TYP)	220 nits
Max. Colors	16.7 M
Viewing Angle	170°(H)/170°(V)
Contrast Ratio	800:1
Back Light Life Time	> 15,000 hours
Touch Screen	5-Wire Resistive / Capacitive Multi-Touch

I/O


USB	USB 2.0 x 4, USB 3.0 x 1 (in side I/O)
Serial Port	Isolated RS-232 x 1
Ethernet	Isolated Gigabit LAN x 2
Audio	Mic-in, Line-out

Mechanical and Environmental

Power Consumption	Full Loading :22Watts
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	IP65 in the front, IPX1
Dimension	300 x 208 x 39 mm
Package Size	540 x 230 x 370 mm
Gross Weight	4kg (8.82lb)
Net Weight	1.5kg (3.3lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

11.6" Fanless Bedside Infotainment Touch Terminal

Dimension / Unit: mm

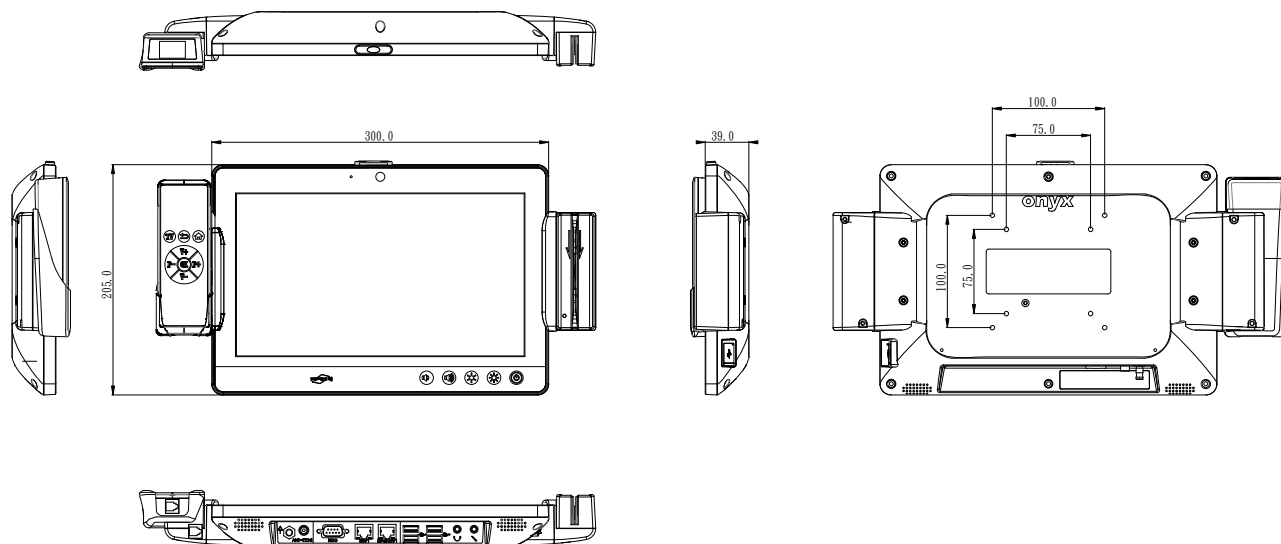

Ordering Information


- » ONYX-1222ET-A1-1110
Slim Medical Panel PC, 11.6" LCD, Intel Celeron J1900, 2GB RAM, DC 12~24V, Resistive Touch
- » ONYX-1222ST-A1-1110
Slim Medical Panel PC, 11.6" LCD, Intel Celeron J1900, 2GB RAM, DC 12~24V, Capacitive Touch

Optional Accessories

- | | |
|---|---|
| <ul style="list-style-type: none"> » 1757306039
Medical Power Adapter, 60W, 12V » OPM-T010-A1
Smart Card Reader Kit » OPM-S02C-A2
Magnetic Stripe Reader Kit » OPM-T011-A1
2M Pixels Camera with Mic Kit » OPM-T018-A3
Handset Kit | <ul style="list-style-type: none"> » OPM-T018-A4
Handset w/Dual-Keypads, Camera » OPM-C16W-A4
WLAN Kit, IEEE 802.11a/b/g/n + Bluetooth 4.0LE/ 3.0HS / 2.1 EDR » OPM-P30D-A10
Power over Ethernet kit |
|---|---|

ONYX-BE153R

15.6" Fanless Android Bedside Infotainment Touch Terminal

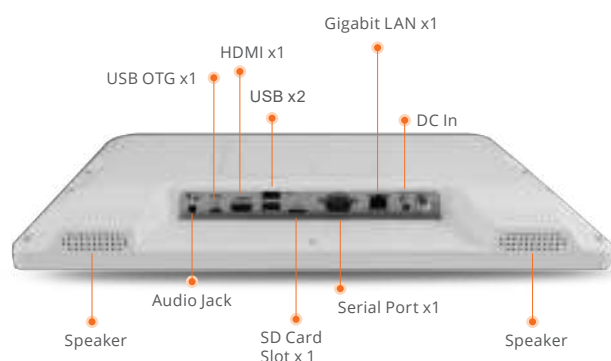

Features

- Rockchip RK3288 Processor
- Android 6.0
- 15.6" Wide Color TFT LCD Touch Terminal
- PCT with Multi-Touch support
- Intuitive Front Access Function Keys
- IP65 Waterproof in front
- Optional VOIP Phone, Webcam and RFID.
- EN 60601-1, UL 60601-1

Specifications

Main Specifications

Processor	Rockchip RK3288 ARM Cortex-A17 QC 1.6GHz
System Memory	DDR3L 2GB
Expansion Interface	Mini PCIe Slot x 1
Storage Disk Drive	16GB eMMC
Wireless Communication	802.11 ac + BT 4.1
Camera	5 Megapixels
Speaker	3W x2
Security	13.56MHz RFID Reader (Optional)
Function Key	Power, Volume Up/Down, Brightness Up/Down, LCD On/Off, Touch On/Off
Power Requirement	DC 12V / Power Over Ethernet
OS Support	Android 6.0

Display

Size / Type	15.6" (16:9) Color TFT LCD
Max. Resolution	1920 x 1080 FHD
Luminance(cd/m2)(TYP)	220 nits
Max. Colors	16.7 M
Viewing Angle	90 (H)/60(V)
Contrast Ratio	500:1
Touch Screen	Projected Capacitive Touch

I/O


USB	USB 2.0 (Type-A) x2
Serial Port	RS-232 x1 (Optional)
Ethernet	Gigabit LAN x1 (Support Power over Ethernet)
Audio	3.5mm Phone Jack x1
Video	HDMI Out x1 (Optional)
SD Card Slot	Micro SD x1 (Optional)
DC-In	DC-In Jack x1

Mechanical and Environmental

Infection Control	Anti-Bacteria (Optional)
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	Front Panel: IP65, Whole Unit: IP54
Dimension	397.8 x 268.0 x 42.3 mm
Package Size	721 x 224 x 464 mm
Gross Weight	6.5 kg (14.33lb)
Net Weight	2.8 kg (6.17lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

15.6" Fanless Android Bedside Infotainment Touch Terminal

Dimension / Unit: mm

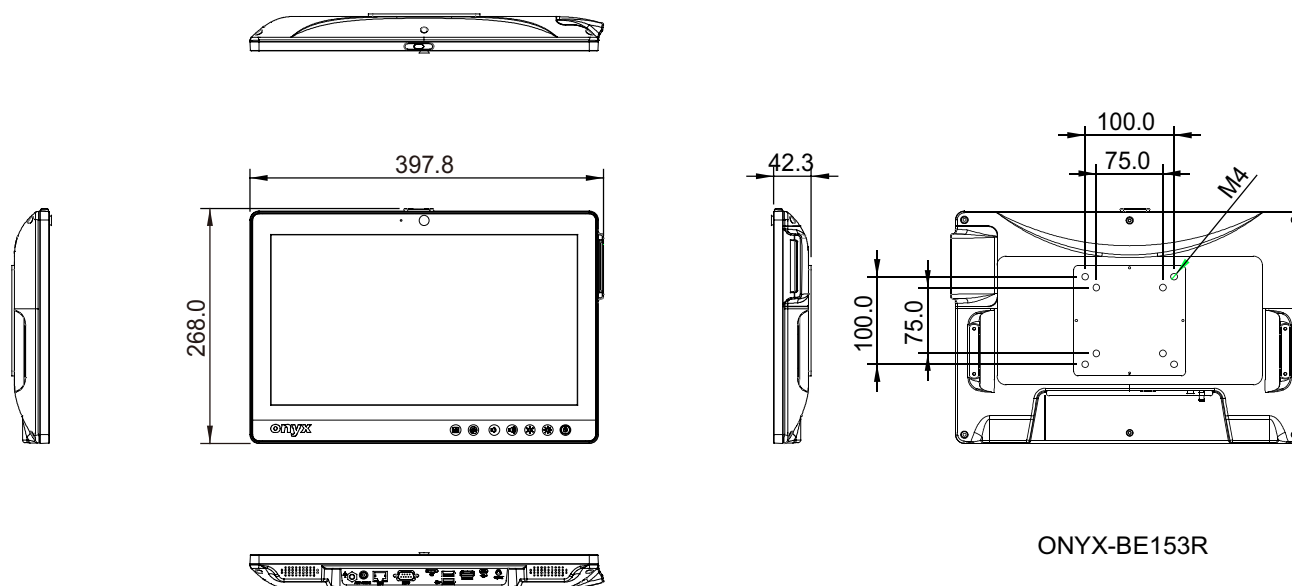

Ordering Information


- » ONYX-BE153R-P01-A1-0201
RISC Beside Terminal.RK3288.15.6.C-TS.2GB RAM.16GB eMMC.Camera.POE.Android 6.x
- » ONYX-BE153R-P01-A1-0202
RISC Beside Terminal.RK3288.15.6.C-TS.2GB RAM.16GB eMMC.POE.Android 6.x

Optional Accessories

- » 1757306039
Medical Adapter.60W.12V/5A
- » OPM-T018-A1
VoIP Handset w/o keypads

ONYX-BE122R

11.6" Fanless Android Bedside Infotainment Touch Terminal

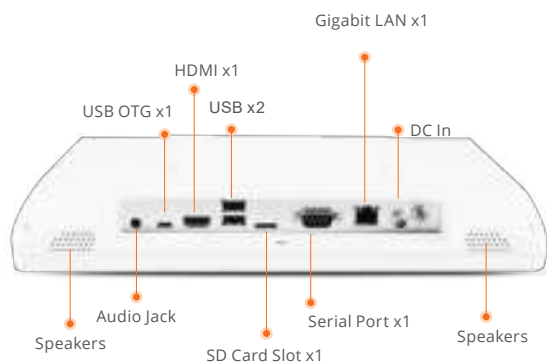

Features

- Rockchip RK3288 Processor
- Android 6.0
- 11.6" Wide Color TFT LCD Touch Terminal
- PCT with Multi-Touch support
- Intuitive Front Access Function Keys
- IP65 Waterproof in front
- Optional VOIP Phone, Webcam and RFID
- EN 60601-1, UL 60601-1

Specifications

Main Specifications

Processor	Rockchip RK3288 ARM Cortex-A17 QC 1.6GHz
System Memory	DDR3L 2GB
Expansion Interface	Mini PCIe Slot x 1
Storage Disk Drive	16/64GB eMMC
Wireless Communication	802.11 ac + BT 4.1
Speaker	2W x2
Camera	5 Megapixels
Security	13.56MHz RFID Reader (Optional)
Function Key	Power, Volume Up/Down, Brightness Up/Down,
Power Requirement	DC 12V / Power Over Ethernet
OS Support	Android 6.0

Display

Size / Type	11.6" (16:9) Color TFT LCD
Max. Resolution	1366 x 768 HD
Luminance(cd/m2)(TYP)	250 nits
Max. Colors	16.7 M
Viewing Angle	90°(H)/60°(V)
Contrast Ratio	500:1
Touch Screen	Projected Capacitive Touch

I/O


USB	USB 2.0 (Type-A) x2
Serial Port	RS-232 x1 (Optional)
Ethernet	Gigabit LAN x1 (Support Power over Ethernet)
Audio	3.5mm Phone Jack x1 (Optional)
Video	HDMI Out x1 (Optional)
SD Card Slot	Micro SD x1 (Optional)
DC-In	DC-In Jack x1

Mechanical and Environmental

Power Consumption	Anti-Bacteria (Optional)
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	Front Panel: IP65, Whole Unit: IP54
Dimension	299.9 x 2049 x 38.9 mm
Package Size	540 x 230 x 370 mm
Gross Weight	4 kg (8.82lb)
Net Weight	1.5 kg (3.3lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

11.6" Fanless Android Bedside Infotainment Touch Terminal

Dimension / Unit: mm

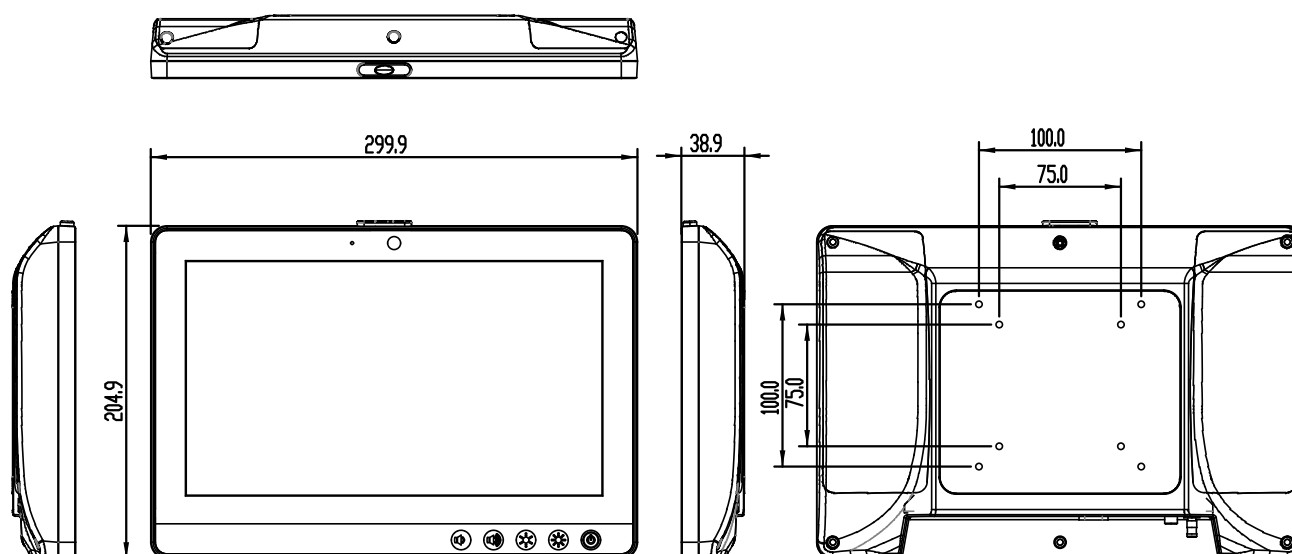

Ordering Information


- » ONYX-BE122R-P01-A1-0201
RISC Beside Terminal.RK3288.11.6".C-TS.2GB RAM.16GB eMMC.Camera.POE.Android 6.x
- » ONYX-BE122R-P01-A1-0202
RISC Beside Terminal.RK3288.11.6".C-TS.2GB RAM.16GB eMMC.POE.Android 6.x

Optional Accessories

- » 1757306039
Medical Adapter.60W.12V/5A
- » OPM-T018-A1
VoIP Handset w/o keypads

ONYX-BE102R

10.1" Fanless Android Bedside Infotainment Touch Terminal

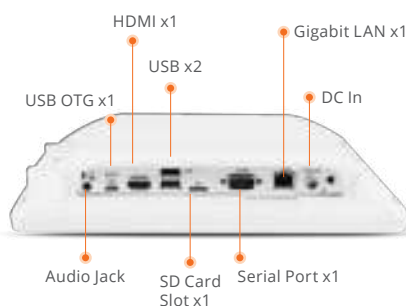

Features

- Rockchip RK3288 Processor
- Android 6.0
- 10.1" Wide Color TFT LCD Touch Terminal
- PCT with Multi-Touch support
- Intuitive Front Access Function Keys
- IP65 Waterproof in front
- Optional VOIP Phone, Webcam and RFID
- EN 60601-1, UL 60601-1

Specifications

Main Specifications

Processor	Rockchip RK3288 ARM Cortex A17 QC 1.6GHz
System Memory	DDR3L 2GB
Expansion Interface	Mini PCIe Slot x 1
Storage Disk Drive	16GB eMMC
Security	13.56MHz RFID Reader (optional)
Wireless Communication	802.11 ac + BT 4.1
Speaker	2W x2
Camera	5 Megapixels
Function Key	Power, Speaker Volume Up/Down, LCD Brightness Up/Down
Power Requirement	DC 12V / Power over Ethernet
OS Support	Android 6.0

Display

Size / Type	10.1" LCD (16:9) Color TFT LCD
Max. Resolution	1280 x 800
Luminance(cd/m2)(TYP)	400 nits
Max. Colors	16.7 M
Viewing Angle	170°(H)/170°(V)
Contrast Ratio	800:1
Touch Screen	Projected Capacitive Touch

I/O


USB	USB 2.0 (Type-A) x2
Serial Port	RS-232 x1 (Optional)
Ethernet	Gigabit LAN x1 (Support Power over Ethernet)
Audio	3.5mm Phone Jack x1 (Optional)
Video	HDMI Out x1 (Optional)
SD Card Slot	Micro SD x1 (Optional)
DC-In	DC-In Jack x1

Mechanical and Environmental

Power Consumption	Anti-Bacteria (Optional)
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	Front Panel: IP65, Whole Unit: IP54
Dimension	262.36 x 191.10 x 45 mm
Package Size	402 x 190 x 335 mm
Gross Weight	3.7 kg (8.2lb)
Net Weight	1.2 kg (2.6lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

10.1" Fanless Android Bedside Infotainment Touch Terminal

Dimension / Unit: mm

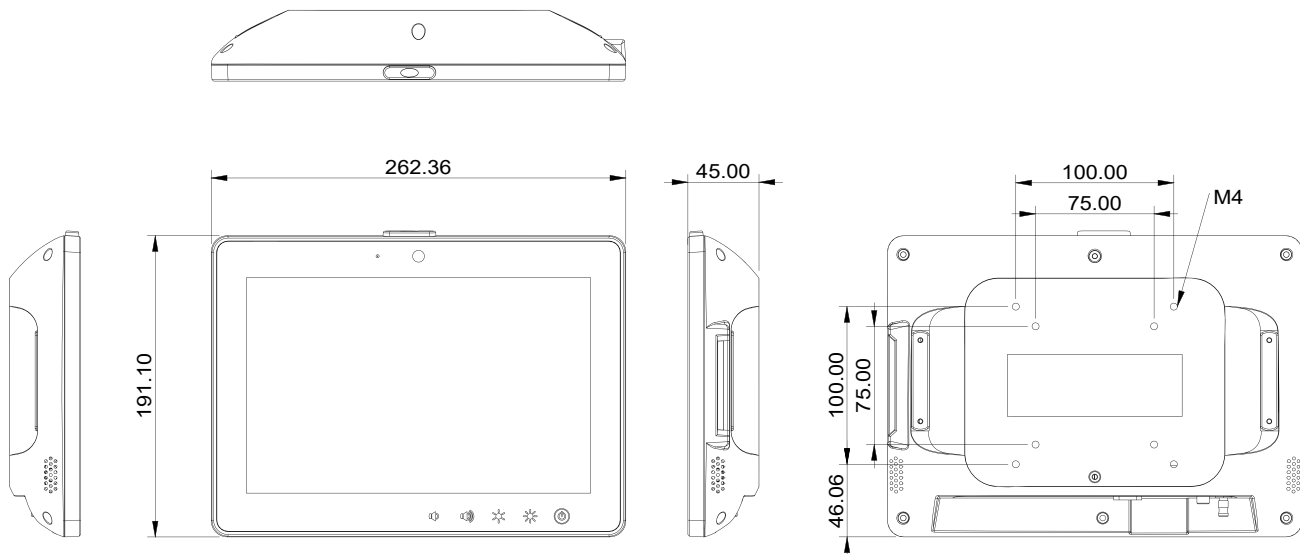

Ordering Information

- » ONYX-BE102R-P01-A1-0201
RISC Beside Terminal.RK3288.10.1".C-TS.2GB RAM.16GB eMMC.Camera.POE.Android 6.x
- » ONYX-BE102R-P01-A1-0202
RISC Beside Terminal.RK3288.10.1".C-TS.2GB RAM.16GB eMMC.POE.Android 6.x

Optional Accessories

- » 1757306039
Medical Adapter.60W.12V/5A
- » OPM-T018-A1

Healthcare Infotainment Accessory Selection

OPM-H13A-A1

OPM-H14A-A1

Easi Wall Mount Swivel ARM



Features

- Built in "Gas Spring" for easy movement
- Cable management
- Anti-bacteria coating (optional)

Specifications

Main Specifications

	OPM-H13A-A1	OPM-H14A-A1
Feature	Long ARM	
Tile	20° up and 35° down (display) 20° up and 60° down (arm)	
Mounting Option	Wall Mount Type	
VESA	75/100mm	
Material	Aluminum alloy and plastic cover	
Pivot	180°, 370°, 270° (wall, arm, display)	
Extension	1907mm	
Capacity	1~6Kg (2.2~13.2lbs)	6~12kg (13.2~26.4lbs)

OPM-H15A-A1

OPM-H16A-A1

Easi Ceiling Mount Swivel ARM



Features

- Built in "Gas Spring" for easy movement
- Cable management
- Anti-bacteria coating (optional)

Specifications

Main Specifications

	OPM-H15A-A1	OPM-H16A-A1
Feature	Ceiling Mount	
Tile	20° up and 35° down (display) 20° up and 60° down (arm)	
Mounting Option	Cell Mount Type	
VESA	75/100mm	
Material	Aluminum alloy and plastic cover	
Pivot	270°, 370°, 270° (ceiling, arm, display)	
Extension	1927mm	
Capacity	1~6Kg	6~12kg

Mobile Cart Computer

Healthcare Infotainment Accessory Selection

OPM-H04A

Ergonomic Wall Mount Swivel ARM



Features

- Durable and easy to clean
- Double Gas springs assisted for high vertical movement
- Fully cable managed


Specifications

Main Specifications

Feature	Long ARM
Tilt	20° up and 40° down
Mounting Option	Wall Mount Type
Material	Aluminum alloy and plastic cover
Arm swivel	180°
Overall reach	1700mm
Capacity	1~8Kg

OPM-T018

Smart VOIP Handset

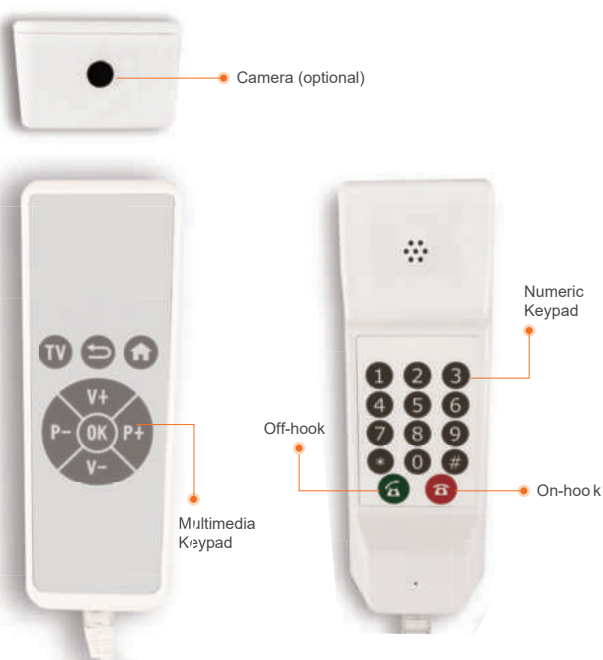

Features

- Extend Onyx Bedside Services closed to the Patients
- Foil keyboard designed for easy cleaning and infection control
- Integrate the hall sensor for auto detection of on and off hook event
- Lockable socket designed for the lost prevention
- Sample code and API available for easy programming of key mapping for different field applications


Specifications

Main Specifications

Interface	USB 2.0 with RJ45 Socket
Connection Cable	41cm Curly Cable with RJ45 Plug
On-hook Key	x1
Off-hook Key	x1
Numeric Keypad	1, 2, 3, 4, 5, 6, 7, 8, 9, 0, *, #
Multimedia Keypad	Home, TV, Back, Channel Up, Channel Down, Volume Up, Volume Down, OK
Hall Sensor	x1
Loudspeaker	x1
Microphone	x1
Camera	2 Megapixels x1 (Optional)
Nurse Call Button	x1 (By Request)
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Storage Humidity	10%~95%@35°C, non-condensing
Dimension	54.6(W) x 160(H) x 34.5(D) mm
Net Weight	Approx. 105g

Medical Slim Mini-ITX MB for OEM/ODM

Medical Slim Mini-ITX MB is a ideal solution for medical computer or instrument. EMI prescan is done to guarantee EN 60601-1-2 compliance. Onyx provides the latest ultra low power and high performance Intel platform to minimize the effort in cpu cooler design and .

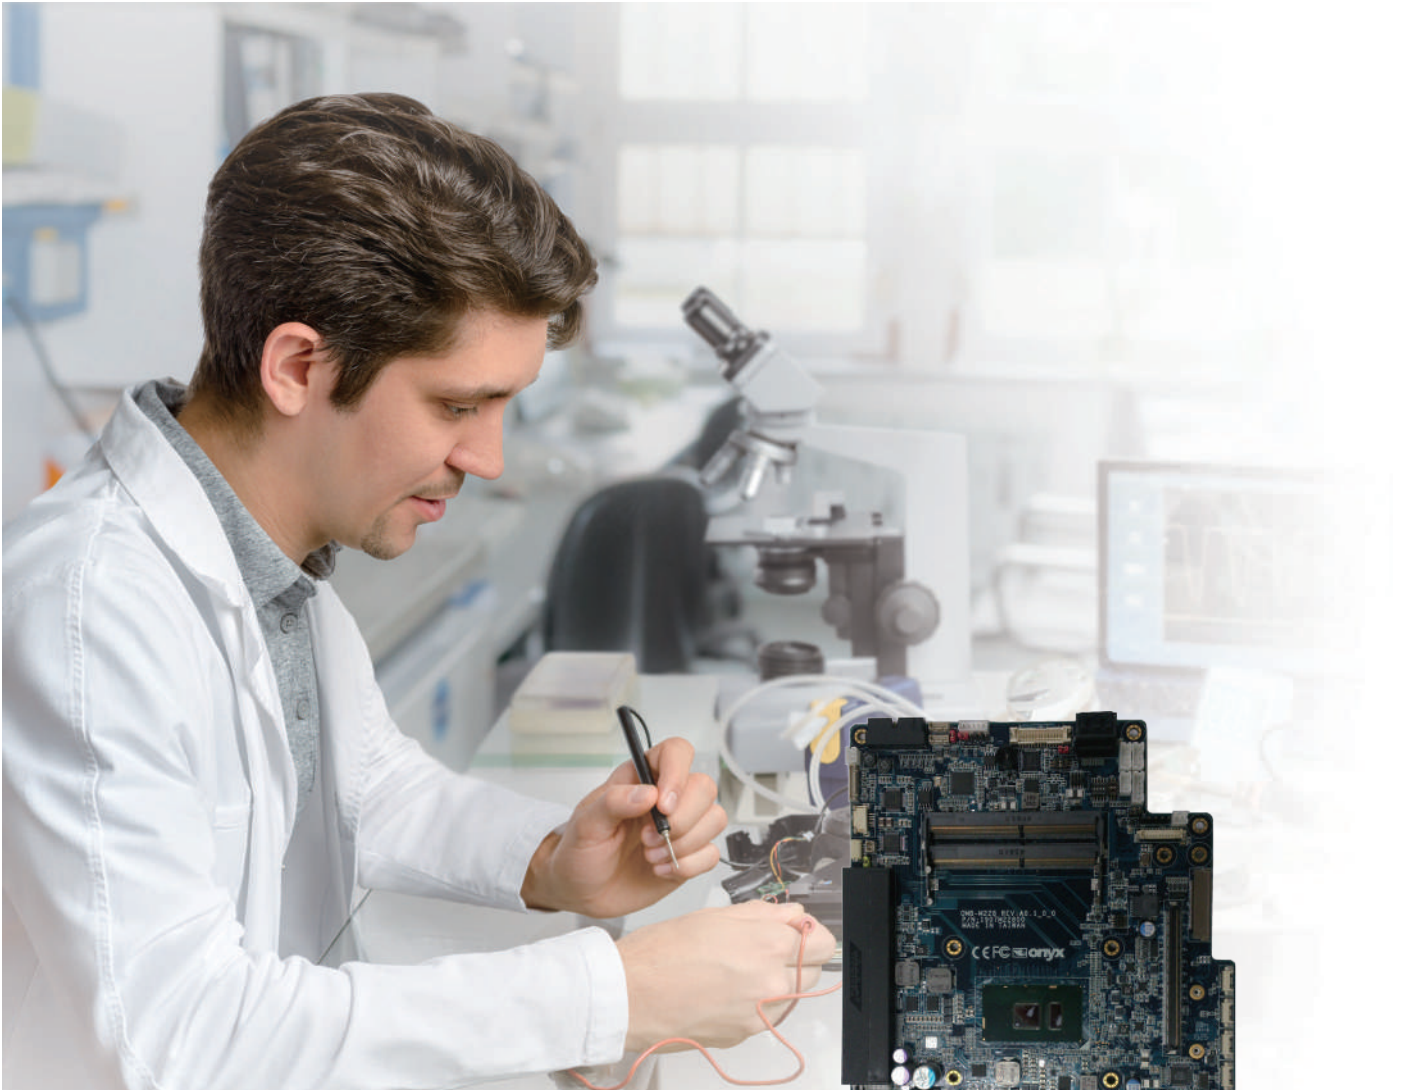

Key Features

- » Intel, AMD Ultra Low Power Processor
- » Dual Independent Display: LVDS, DP
- » PCI Express Slot
- » Low Profile Form Factor
- » Medical Grade EN 60601-1-2 Compliance

Medical Slim Motherboard for OEM/ODM

OMB-M322

AMD Ryzen Embedded V1000 Medical Mini-ITX Motherboard



Features

- AMD Ryzen Embedded V1000 Dual/Quad Core Processor
- Supports ECC/Non-ECC DDR4 SODIMM up to 32GB
- High Speed USB 3.1 x3
- PCI Express[x8] x1, M.2 slot x2, Mini Card x1
- +12V DC Input
- Low profile form factor for all-in-one terminal and 1U chassis
- Medical grade UL/EN-60601 pre-certified with low EMI radiation
- 10 years life cycle guarantee until year 2028



Specifications

Main Specification

Processor	AMD Ryzen Embedded V1000 Processor
System Memory	DDR4 SODIMM x2, Max 32GB
Graphics	AMD Vega GPU with up to 11 Compute Units
Ethernet	Intel I211AT Gigabit x2
Audio	Realtek ALC662 HD Audio Codec
Expansion Interface	PCIe[x8] x1, M.2 2230(E-Key) for WiFi x1, M.2 2280(B-Key) for SSD x1, Half Size Mini Card x1
Power Requirement	+12V DC
OS Support	Windows 10, Linux
Board Size	170mm x 170mm
Operating Temperature	0°C ~60°C

Display

HDMI	HDMI 2.0 x1
DisplayPort	DisplayPort 1.4 x2
LVDS	18/24-bit Dual Channel LVDS x1

I/O

Storage	SATA 6Gb/s x1
USB	USB 3.1 Type-A x2, USB 3.1 Type-C x1, USB 2.0 x2
Serial Port	RS-232 x 2
Ethernet	Gigabit LAN x 2
Audio	Line out, Mic
Digital I/O	(4-in/4-out)

OMB-M228

Skylake Medical Mini ITX Motherboard



Features

- Intel® 6th Generation Skylake-U Core i Series 14nm Processor
- Supports DDR4 SODIMM x2, up to 16GB
- Supports 4K x 2K High Resolution Display
- High speed USB 3.1 x2, USB 3.0 x4
- PCI Express[x4] x1, PCI Express[x1] , PCI x1, M.2 slot x1, Half Size Mini Card slot x1
- +12 to +24V Wide Range DC Input
- Low profile form factor for all-in-one terminal and 1U chassis.
- Medical grade UL/EN-60601 pre-certified with low EMI radiation
- 7 years life cycle guarantee until year 2022



Specifications

System

Processor	Intel® 6th Generation Core i Series 14nm Processor
System Memory	DDR4 SoDIMM x2, Max. 32GB
Graphics	Intel® HD Graphics
Embedded Controller	ITE IT8528
Ethernet	Intel® Jacksonville Gigabit(with iAMT) x1, Intel® i219 Gigabit 1 x1
Audio	Realtek ALC892 HD Audio Codec
Expansion Interface	PCIe[x4] x1, PCIe[x1] or PCI x1, Half Size Mini Card x1, M.2 x1
Trusted Platform Module	TPM 1.2, Infineon SLB 9660
BIOS	AMI
OS Support	Windows 7 32/6-bit, Windows 10 32/64-bit, Linux
Power Requirement	+12V to +24V DC
Power Consumption	TBD
Board Size	160mm x 209mm
Operating Temperature	0°C ~60°C

Display

Video Out	LVDS x1, Display Port x2
LVDS	Up to 1920 x 1200 resolution, 18/24-bit dual channel
Display Port	Up to 3840 x 2160 resolution

I/O

Storage	SATA 6.0Gb/s x2
USB	USB 3.1 x2, USB 3.0 x4, USB 2.0 x6
Audio	Line-out , Mic
Touch Screen	Supports 5-wire resistive touch screen
LAN	Gigabit Ethernet
Speaker	5W x2
Power Input	Screw Lock DC Jack

