
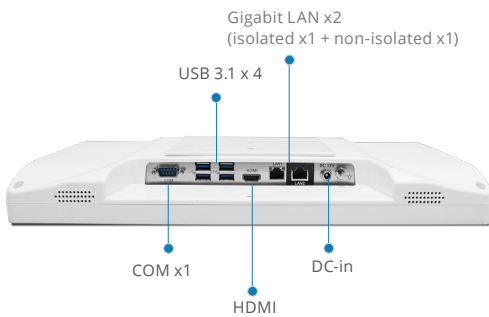


Slim Medical All in One PC

# SMA-1533

15.6" Fanless Slim Medical All in One PC

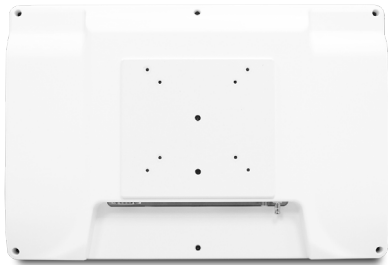

## Features

- Intel® Celeron N6210/Atom x6211E /Atom x6425E Processor
- 15.6" High Brightness 300-nit Full HD LCD
- Supports DDR4 SODIMM up to 16GB (optional In-Band ECC support)
- Capacitive Multi-Touch Screen
- Proprietary PCI Express[x1] Interface
- Easy Cleaning Flat Screen
- 4 Programmable Smart Function Keys
- High Speed USB 3.1 Port
- 2.0M Pixels Camera with Mic (optional)
- HDMI 2.0b Port for 2nd Display
- RFID Reader (optional)
- +12V DC input / Power over Ethernet(optional)

## Specifications

### MAIN SPECIFICATIONS

Processor	Intel® Atom™ x6425E Quad Core Processor, Intel® Atom™ x6211E Dual Core Processor, Intel® Celeron™ N6210 Dual Core Processor
System Memory	Supports DDR4 3200 SODIMM up to 16GB ( In-Band ECC with Atom x6211E)
Expansion Interface	M.2 2230(E-key) x 1, Proprietary PCIe[x1] x 1
Storage Disk Drive	M.2 2242 SATA SSD x1
Security	RFID Reader (optional)
Wireless Communication	802.11ac/ax(optional) + Bluetooth 5.1/5.3(optional)
Speaker	3W x 2
Function Key	LCD Brightness Up/Down, Touch Screen On/Off
Power Requirement	DC 12V / Power over Ethernet(optional)
OS Support	Windows 10, Windows 11 , Linux

### DISPLAY

Size / Type	15.6" LCD
Max. Resolution	1920 x 1080
Luminance(cd/m2)(TYP)	300 nits
Max. Colors	16.2 M
Viewing Angle	178°(H)/178°(V)
Contrast Ratio	1000:1
Back Light Life Time	> 30,000 hours
Touch Screen	Capacitive Multi-Touch

### I/O


USB	USB 3.1 Gen 1 x4
Serial Port	RS-232 x 1
Ethernet	Gigabit LAN x2 (isolated x1 + non-isolated x1)
Video Out	HDMI 2.0b x 1

### MECHANICAL AND ENVIRONMENTAL

Power Consumption	TBD
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Mounting	VESA 75/100 mm
Degree of Protection	IP65 in the front, IPX1
Dimension	398 x 265 x 47mm
Package Size	721 x 224 x 464mm
Gross Weight	6.5 kg (14.3lb)
Net Weight	2.8 kg (6.2lb)
Certifications	CE: EN 60601-1-2:2015(V4.0), EN 60601-1:2006/A1:2013(V3.1) FCC: Part 18 Class B UL: ANSI/AAMI ES60601-1:2012 (V3.1) cUL: CAN/CSA-C22.2 No. 60601-1:2014 (V3.1)

## 15.6" Fanless Slim Medical All in One PC

Dimension / Unit: mm

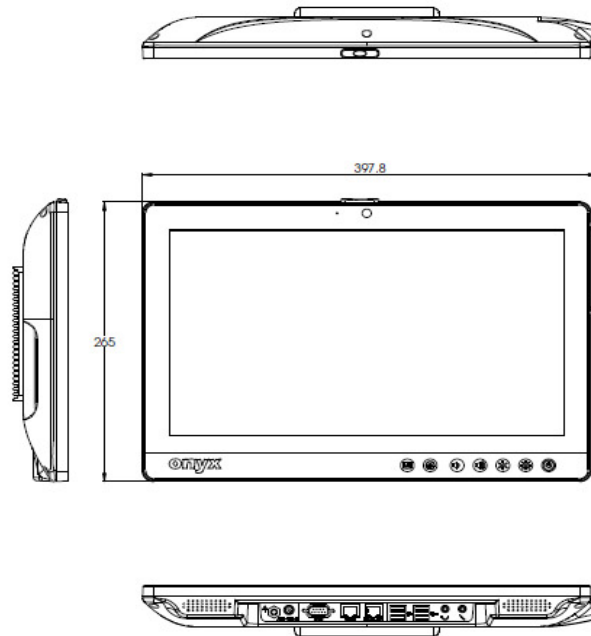

### Ordering Information

- SMA-1533-P1-A1-0010  
Slim Medial AIO, 15.6" FHD LCD, Capacitive Touch, Celeron N6210, DC 12V
- SMA-1533-P2-A1-0010  
Slim Medial AIO, 15.6" FHD LCD, Capacitive Touch, Atom x6211E, DC 12V

### Optional Accessories

- 125530060C  
Medical Power Adapter, 60W, 12V
- OPM-T011-A1  
2M Pixels Camera with Mic Kit
- OPM-C15W-A5  
WLAN Kit, IEEE 802.11ac + Bluetooth 5.1